

The Open Source CFD Toolbox

Programmer's Guide

Version 1.5 9th July 2008 Copyright © 2000, 2001, 2002, 2003, 2004, 2005, 2006, 2007, 2008 OpenCFD Limited.

Permission is granted to copy, distribute and/or modify this document under the terms of the GNU Free Documentation License, Version 1.2 published by the Free Software Foundation; with no Invariant Sections, no Back-Cover Texts and one Front-Cover Text: "Available free from openfoam.org." A copy of the license is included in the section entitled "GNU Free Documentation License".

This document is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE.

Typeset in LATEX.

GNU Free Documentation License

Version 1.2, November 2002 Copyright ©2000,2001,2002 Free Software Foundation, Inc.

59 Temple Place, Suite 330, Boston, MA 02111-1307 USA

Everyone is permitted to copy and distribute verbatim copies of this license document, but changing it is not allowed.

Preamble

The purpose of this License is to make a manual, textbook, or other functional and useful document "free" in the sense of freedom: to assure everyone the effective freedom to copy and redistribute it, with or without modifying it, either commercially or noncommercially. Secondarily, this License preserves for the author and publisher a way to get credit for their work, while not being considered responsible for modifications made by others.

This License is a kind of "copyleft", which means that derivative works of the document must themselves be free in the same sense. It complements the GNU General Public License, which is a copyleft license designed for free software.

We have designed this License in order to use it for manuals for free software, because free software needs free documentation: a free program should come with manuals providing the same freedoms that the software does. But this License is not limited to software manuals; it can be used for any textual work, regardless of subject matter or whether it is published as a printed book. We recommend this License principally for works whose purpose is instruction or reference.

1. APPLICABILITY AND DEFINITIONS

This License applies to any manual or other work, in any medium, that contains a notice placed by the copyright holder saying it can be distributed under the terms of this License. Such a notice grants a world-wide, royalty-free license, unlimited in duration, to use that work under the conditions stated herein. The "**Document**", below, refers to any such manual or work. Any member of the public is a licensee, and is addressed as "you". You accept the license if you copy, modify or distribute the work in a way requiring permission under copyright law.

A "Modified Version" of the Document means any work containing the Document or a portion of it, either copied verbatim, or with modifications and/or translated into another language.

A "Secondary Section" is a named appendix or a front-matter section of the Document that deals exclusively with the relationship of the publishers or authors of the Document to the Document's overall subject (or to related matters) and contains nothing that could fall directly within that overall subject. (Thus, if the Document is in part a textbook of mathematics, a Secondary Section may not explain any mathematics.) The relationship could be a matter of historical connection with the subject or with related matters, or of legal, commercial, philosophical, ethical or political position regarding them.

The "Invariant Sections" are certain Secondary Sections whose titles are designated, as being those of Invariant Sections, in the notice that says that the Document is released under this License. If a section does not fit the above definition of Secondary then it is not allowed to be designated as Invariant. The Document may contain zero Invariant Sections. If the Document does not identify any Invariant Sections then there are none.

The "Cover Texts" are certain short passages of text that are listed, as Front-Cover Texts or Back-Cover Texts, in the notice that says that the Document is released under this License. A Front-Cover Text may be at most 5 words, and a Back-Cover Text may be at most 25 words.

A "Transparent" copy of the Document means a machine-readable copy, represented in a format whose specification is available to the general public, that is suitable for revising the document straightforwardly with generic text editors or (for images composed of pixels) generic paint programs or (for drawings) some widely available drawing editor, and that is suitable for input to text formatters or for automatic translation to a variety of formats suitable for input to text formatters. A copy made in an otherwise Transparent file format whose markup, or absence of markup, has been arranged to thwart or discourage subsequent modification by readers is not Transparent. An image format is not Transparent if used for any substantial amount of text. A copy that is not "Transparent" is called "Opaque".

Examples of suitable formats for Transparent copies include plain ASCII without markup, Texinfo input format, LaTeX input format, SGML or XML using a publicly available DTD, and standard-conforming simple HTML, PostScript or PDF designed for human modification. Examples of transparent image formats include PNG, XCF and JPG. Opaque formats include proprietary formats that can be read and edited only by proprietary word processors, SGML or XML for which the DTD and/or processing tools are not generally available, and the machine-generated HTML, PostScript or PDF produced by some word processors for output purposes only.

The "Title Page" means, for a printed book, the title page itself, plus such following pages as are needed to hold, legibly, the material this License requires to appear in the title page. For works in formats which do not have any title page as such, "Title Page" means the text near the most prominent appearance of the work's title, preceding the beginning of the body of the text.

A section "Entitled XYZ" means a named subunit of the Document whose title either is precisely XYZ or contains XYZ in parentheses following text that translates XYZ in another language. (Here XYZ stands for a specific section name mentioned below, such as "Acknowledgements", "Dedications", "Endorsements", or "History".) To "Preserve the Title" of such a section when you modify the Document means that it remains a section "Entitled XYZ" according to this definition.

The Document may include Warranty Disclaimers next to the notice which states that this License applies to the Document. These Warranty Disclaimers are considered to be included by reference in this License, but only as regards disclaiming warranties: any other implication that these Warranty Disclaimers may have is void and has no effect on the meaning of this License.

2. VERBATIM COPYING

You may copy and distribute the Document in any medium, either commercially or noncommercially, provided that this License, the copyright notices, and the license notice saying this License applies to the Document are reproduced in all copies, and that you add no other conditions whatsoever to those of this License. You may not use technical measures to obstruct or control the reading or further copying of the copies you make or distribute. However, you may accept compensation in exchange for copies. If you distribute a large enough number of copies you must also follow the conditions in section 3.

You may also lend copies, under the same conditions stated above, and you may publicly display copies.

3. COPYING IN QUANTITY

If you publish printed copies (or copies in media that commonly have printed covers) of the Document, numbering more than 100, and the Document's license notice requires Cover Texts, you must enclose the copies in covers that carry, clearly and legibly, all these Cover Texts: Front-Cover Texts on the front cover, and Back-Cover Texts on the back cover. Both covers must also clearly and legibly identify you as the publisher of these copies. The front cover must present the full title with all words of the title equally prominent and visible. You may add other material on the covers in addition. Copying with changes limited to the covers, as long as they preserve the title of the Document and satisfy these conditions, can be treated as verbatim copying in other respects.

If the required texts for either cover are too voluminous to fit legibly, you should put the first ones listed (as many as fit reasonably) on the actual cover, and continue the rest onto adjacent pages.

If you publish or distribute Opaque copies of the Document numbering more than 100, you must either include a machine-readable Transparent copy along with each Opaque copy, or state in or with each Opaque copy a computer-network location from which the general network-using public has access to download using public-standard network protocols a complete Transparent copy of the Document, free of added material. If you use the latter option, you must take reasonably prudent steps, when you begin distribution of Opaque copies in quantity, to ensure that this Transparent copy will remain thus accessible at the stated location until at least one year after the last time you distribute an Opaque copy (directly or through your agents or retailers) of that edition to the public.

It is requested, but not required, that you contact the authors of the Document well before redistributing any large number of copies, to give them a chance to provide you with an updated version of the Document.

4. MODIFICATIONS

You may copy and distribute a Modified Version of the Document under the conditions of sections 2 and 3 above, provided that you release the Modified Version under precisely this License, with the Modified Version filling the role of the Document, thus licensing distribution and modification of the Modified Version to whoever possesses a copy of it. In addition, you must do these things in the Modified Version:

- A. Use in the Title Page (and on the covers, if any) a title distinct from that of the Document, and from those of previous versions (which should, if there were any, be listed in the History section of the Document). You may use the same title as a previous version if the original publisher of that version gives permission.
- B. List on the Title Page, as authors, one or more persons or entities responsible for authorship of the modifications in the Modified Version, together with at least five of the principal authors of the Document (all of its principal authors, if it has fewer than five), unless they release you from this requirement.
- C. State on the Title page the name of the publisher of the Modified Version, as the publisher.
- D. Preserve all the copyright notices of the Document.
- E. Add an appropriate copyright notice for your modifications adjacent to the other copyright notices.
- F. Include, immediately after the copyright notices, a license notice giving the public permission to use the Modified Version under the terms of this License, in the form shown in the Addendum below.
- G. Preserve in that license notice the full lists of Invariant Sections and required Cover Texts given in the Document's license notice.
- H. Include an unaltered copy of this License.
- I. Preserve the section Entitled "History", Preserve its Title, and add to it an item stating at least the title, year, new authors, and publisher of the Modified Version as given on the Title Page. If there is no section Entitled "History" in the Document, create one stating the title, year, authors, and publisher of the Document as given on its Title Page, then add an item describing the Modified Version as stated in the previous sentence.

- J. Preserve the network location, if any, given in the Document for public access to a Transparent copy of the Document, and likewise the network locations given in the Document for previous versions it was based on. These may be placed in the "History" section. You may omit a network location for a work that was published at least four years before the Document itself, or if the original publisher of the version it refers to gives permission.
- K. For any section Entitled "Acknowledgements" or "Dedications", Preserve the Title of the section, and preserve in the section all the substance and tone of each of the contributor acknowledgements and/or dedications given therein.
- L. Preserve all the Invariant Sections of the Document, unaltered in their text and in their titles. Section numbers or the equivalent are not considered part of the section titles.
- M. Delete any section Entitled "Endorsements". Such a section may not be included in the Modified Version.
- N. Do not retitle any existing section to be Entitled "Endorsements" or to conflict in title with any Invariant Section.
- O. Preserve any Warranty Disclaimers.

If the Modified Version includes new front-matter sections or appendices that qualify as Secondary Sections and contain no material copied from the Document, you may at your option designate some or all of these sections as invariant. To do this, add their titles to the list of Invariant Sections in the Modified Version's license notice. These titles must be distinct from any other section titles.

You may add a section Entitled "Endorsements", provided it contains nothing but endorsements of your Modified Version by various parties—for example, statements of peer review or that the text has been approved by an organization as the authoritative definition of a standard.

You may add a passage of up to five words as a Front-Cover Text, and a passage of up to 25 words as a Back-Cover Text, to the end of the list of Cover Texts in the Modified Version. Only one passage of Front-Cover Text and one of Back-Cover Text may be added by (or through arrangements made by) any one entity. If the Document already includes a cover text for the same cover, previously added by you or by arrangement made by the same entity you are acting on behalf of, you may not add another; but you may replace the old one, on explicit permission from the previous publisher that added the old one.

The author(s) and publisher(s) of the Document do not by this License give permission to use their names for publicity for or to assert or imply endorsement of any Modified Version.

5. COMBINING DOCUMENTS

You may combine the Document with other documents released under this License, under the terms defined in section 4 above for modified versions, provided that you include in the combination all of the Invariant Sections of all of the original documents, unmodified, and list them all as Invariant Sections of your combined work in its license notice, and that you preserve all their Warranty Disclaimers.

The combined work need only contain one copy of this License, and multiple identical Invariant Sections may be replaced with a single copy. If there are multiple Invariant Sections with the same name but different contents, make the title of each such section unique by adding at the end of it, in parentheses, the name of the original author or publisher of that section if known, or else a unique number. Make the same adjustment to the section titles in the list of Invariant Sections in the license notice of the combined work.

In the combination, you must combine any sections Entitled "History" in the various original documents, forming one section Entitled "History"; likewise combine any sections Entitled "Acknowledgements", and any sections Entitled "Dedications". You must delete all sections Entitled "Endorsements".

6. COLLECTIONS OF DOCUMENTS

You may make a collection consisting of the Document and other documents released under this License, and replace the individual copies of this License in the various documents with a single copy that is included in the collection, provided that you follow the rules of this License for verbatim copying of each of the documents in all other respects.

You may extract a single document from such a collection, and distribute it individually under this License, provided you insert a copy of this License into the extracted document, and follow this License in all other respects regarding verbatim copying of that document.

7. AGGREGATION WITH INDEPENDENT WORKS

A compilation of the Document or its derivatives with other separate and independent documents or works, in or on a volume of a storage or distribution medium, is called an "aggregate" if the copyright resulting from the compilation is not used to limit the legal rights of the compilation's users beyond what the individual works permit. When the Document is included in an aggregate, this License does not apply to the other works in the aggregate which are not themselves derivative works of the Document.

If the Cover Text requirement of section 3 is applicable to these copies of the Document, then if the Document is less than one half of the entire aggregate, the Document's Cover Texts may be placed on covers that bracket the Document within the aggregate, or the electronic equivalent of covers if the Document is in electronic form. Otherwise they must appear on printed covers that bracket the whole aggregate.

8. TRANSLATION

Translation is considered a kind of modification, so you may distribute translations of the Document under the terms of section 4. Replacing Invariant Sections with translations requires special permission from their copyright holders, but you may include translations of some or all Invariant Sections in addition to the original versions of these Invariant Sections. You may include a translation of this License, and all the license notices in the Document, and any Warranty Disclaimers, provided that you also include the original English version of this License and the original versions of those notices and disclaimers. In case of a disagreement between the translation and the original version of this License or a notice or disclaimer, the original version will prevail.

If a section in the Document is Entitled "Acknowledgements", "Dedications", or "History", the requirement (section 4) to Preserve its Title (section 1) will typically require changing the actual title.

9. TERMINATION

You may not copy, modify, sublicense, or distribute the Document except as expressly provided for under this License. Any other attempt to copy, modify, sublicense or distribute the Document is void, and will automatically terminate your rights under this License. However, parties who have received copies, or rights, from you under this License will not have their licenses terminated so long as such parties remain in full compliance.

10. FUTURE REVISIONS OF THIS LICENSE

The Free Software Foundation may publish new, revised versions of the GNU Free Documentation License from time to time. Such new versions will be similar in spirit to the present version, but may differ in detail to address new problems or concerns. See http://www.gnu.org/copyleft/.

Each version of the License is given a distinguishing version number. If the Document specifies that a particular numbered version of this License "or any later version" applies to it, you have the option of following the terms and conditions either of that specified version or of

any later version that has been published (not as a draft) by the Free Software Foundation. If the Document does not specify a version number of this License, you may choose any version ever published (not as a draft) by the Free Software Foundation.

Trademarks

ANSYS is a registered trademark of ANSYS Inc.

CFX is a registered trademark of AEA Technology Engineering Software Ltd.

CHEMKIN is a registered trademark of Sandia National Laboratories

CORBA is a registered trademark of Object Management Group Inc.

openDX is a registered trademark of International Business Machines Corporation

EnSight is a registered trademark of Computational Engineering International Ltd.

AVS/Express is a registered trademark of Advanced Visual Systems Inc.

Fluent is a registered trademark of Fluent Inc.

GAMBIT is a registered trademark of Fluent Inc.

Fieldview is a registered trademark of Intelligent Light

Icem-CFD is a registered trademark of ICEM Technologies GmbH

I-DEAS is a registered trademark of Structural Dynamics Research Corporation

JAVA is a registered trademark of Sun Microsystems Inc.

Linux is a registered trademark of Linus Torvalds

MICO is a registered trademark of MICO Inc.

ParaView is a registered trademark of Kitware

STAR-CD is a registered trademark of Computational Dynamics Ltd.

UNIX is a registered trademark of The Open Group

Contents

C	opyri	ght Notice	P-2
\mathbf{G}	NU I	Free Documentation Licence	P-3
	1. A	PPLICABILITY AND DEFINITIONS	P-3
	2. V	ERBATIM COPYING	P-4
		COPYING IN QUANTITY	P-4
	4. N	MODIFICATIONS	P-5
		COMBINING DOCUMENTS	P-6
	6. C	COLLECTIONS OF DOCUMENTS	P-7
	7. A	GGREGATION WITH INDEPENDENT WORKS	P-7
	8. T	RANSLATION	P-7
		ERMINATION	P-7
		FUTURE REVISIONS OF THIS LICENSE	P-7
Tr	ader	narks	P-9
C	onter	nts	P-11
1	Ten	sor mathematics	P-15
	1.1	Coordinate system	P-15
	1.2	Tensors	P-15
		1.2.1 Tensor notation	P-17
	1.3	Algebraic tensor operations	P-17
		1.3.1 The inner product	P-18
		1.3.2 The double inner product of two tensors	P-19
		1.3.3 The triple inner product of two third rank tensors	P-19
		1.3.4 The outer product	P-19
		1.3.5 The cross product of two vectors	P-19
		1.3.6 Other general tensor operations	P-20
		1.3.7 Geometric transformation and the identity tensor	P-20
		1.3.8 Useful tensor identities	P-21
		1.3.9 Operations exclusive to tensors of rank 2	P-21
		1.3.10 Operations exclusive to scalars	P-22
	1.4	OpenFOAM tensor classes	P-23
		1.4.1 Algebraic tensor operations in OpenFOAM	P-23
	1.5	Dimensional units	P-25
2	Dis	cretisation procedures	P-27
	2.1	Differential operators	P-27
		2.1.1 Gradient	P-27
		2.1.2 Divergence	P-28

P-12 Contents

		2.1.3	Curl
		2.1.4	Laplacian
		2.1.5	Temporal derivative
	2.2	Overvi	iew of discretisation
		2.2.1	OpenFOAM lists and fields
	2.3	Discre	tisation of the solution domain
		2.3.1	Defining a mesh in OpenFOAM
		2.3.2	Defining a geometricField in OpenFOAM
	2.4	Equati	ion discretisation
		2.4.1	The Laplacian term
		2.4.2	The convection term
		2.4.3	First time derivative
		2.4.4	Second time derivative
		2.4.5	Divergence
		2.4.6	Gradient
		2.4.7	Grad-grad squared
		2.4.8	Curl
		2.4.9	Source terms
			Other explicit discretisation schemes
	2.5		oral discretisation
	٠.٠	2.5.1	
	2.6		lary Conditions
	2.0	2.6.1	Physical boundary conditions
3		_	of the use of OpenFOAM
	3.1		around a cylinder
		3.1.1	Problem specification
		3.1.2	Note on potentialFoam
		3.1.3	Mesh generation
		3.1.4	Boundary conditions and initial fields
		3.1.5	Running the case
		3.1.6	Generating the analytical solution
		3.1.7	Exercise
	3.2		v turbulent flow over a backward-facing step
		3.2.1	Problem specification
		3.2.2	Mesh generation
		3.2.3	Boundary conditions and initial fields
		3.2.4	Case control
		3.2.5	Running the case and post-processing
	3.3		sonic flow over a forward-facing step
		3.3.1	Problem specification
		3.3.2	Mesh generation
		3.3.3	Running the case
		3.3.4	Exercise
	3.4	Decom	appression of a tank internally pressurised with water
		3.4.1	Problem specification
		3.4.2	Mesh Generation
		3.4.3	Preparing the Run
		3.4.4	Running the case
		3.4.5	Improving the solution by refining the mesh
	3.5		etohydrodynamic flow of a liquid
		0 -	v v

Content	S		 P-13
	3.5.1	Problem specification	P-67
	3.5.2	Mesh generation	P-69
		Running the case	P-70
Index			P-73

P-14 Contents

Chapter 1

Tensor mathematics

This Chapter describes tensors and their algebraic operations and how they are represented in mathematical text in this book. It then explains how tensors and tensor algebra are programmed in OpenFOAM.

1.1 Coordinate system

OpenFOAM is primarily designed to solve problems in continuum mechanics, *i.e.* the branch of mechanics concerned with the stresses in solids, liquids and gases and the deformation or flow of these materials. OpenFOAM is therefore based in 3 dimensional space and time and deals with physical entities described by tensors. The coordinate system used by OpenFOAM is the right-handed rectangular Cartesian axes as shown in Figure 1.1. This system of axes is constructed by defining an origin O from which three lines are drawn at right angles to each other, termed the Ox, Oy, Oz axes. A right-handed set of axes is defined such that to an observer looking down the Oz axis (with O nearest them), the arc from a point on the Ox axis to a point on the Oy axis is in a clockwise sense.




Figure 1.1: Right handed axes

1.2 Tensors

The term tensor describes an entity that belongs to a particular space and obeys certain mathematical rules. Briefly, tensors are represented by a set of *component values* relating to a set of unit base vectors; in OpenFOAM the unit base vectors \mathbf{i}_x , \mathbf{i}_y and \mathbf{i}_z are

P-16 Tensor mathematics

aligned with the right-handed rectangular Cartesian axes x, y and z respectively. The base vectors are therefore orthogonal, i.e. at right-angles to one another. Every tensor has the following attributes:

Dimension d of the particular space to which they belong, *i.e.* d = 3 in OpenFOAM;

Rank An integer $r \geq 0$, such that the number of component values $= d^r$.

While OpenFOAM 1.x is set to 3 dimensions, it offers tensors of ranks 0 to 3 as standard while being written in such a way to allow this basic set of ranks to be extended indefinitely. Tensors of rank 0 and 1, better known as scalars and vectors, should be familiar to readers; tensors of rank 2 and 3 may not be so familiar. For completeness all ranks of tensor offered as standard in OpenFOAM 1.x are reviewed below.

- Rank 0 'scalar' Any property which can be represented by a single real number, denoted by characters in italics, e.g. mass m, volume V, pressure p and viscosity μ .
- **Rank 1 'vector'** An entity which can be represented physically by both magnitude and direction. In component form, the vector $\mathbf{a} = (a_1, a_2, a_3)$ relates to a set of Cartesian axes x, y, z respectively. The *index notation* presents the same vector as a_i , i = 1, 2, 3, although the list of indices i = 1, 2, 3 will be omitted in this book, as it is intuitive since we are always dealing with 3 dimensions.
- Rank 2 'tensor' or second rank tensor, T has 9 components which can be expressed in array notation as:

$$\mathbf{T} = T_{ij} = \begin{pmatrix} T_{11} & T_{12} & T_{13} \\ T_{21} & T_{22} & T_{23} \\ T_{31} & T_{32} & T_{33} \end{pmatrix}$$
(1.1)

The components T_{ij} are now represented using 2 indices since r=2 and the list of indices i, j=1,2,3 is omitted as before. The components for which i=j are referred to as the diagonal components, and those for which $i \neq j$ are referred to as the off-diagonal components. The *transpose* of **T** is produced by exchanging components across the diagonal such that

$$\mathbf{T}^{\mathrm{T}} = T_{ji} = \begin{pmatrix} T_{11} & T_{21} & T_{31} \\ T_{12} & T_{22} & T_{32} \\ T_{13} & T_{23} & T_{33} \end{pmatrix}$$
(1.2)

Note: a rank 2 tensor is often colloquially termed 'tensor' since the occurrence of higher order tensors is fairly rare.

- **Symmetric rank 2** The term 'symmetric' refers to components being symmetric about the diagonal, *i.e.* $T_{ij} = T_{ji}$. In this case, there are only 6 independent components since $T_{12} = T_{21}$, $T_{13} = T_{31}$ and $T_{23} = T_{32}$. OpenFOAM distinguishes between symmetric and non-symmetric tensors to save memory by storing 6 components rather than 9 if the tensor is symmetric. Most tensors encountered in continuum mechanics are symmetric.
- **Rank 3** has 27 components and is represented in index notation as P_{ijk} which is too long to represent in array notation as in Equation 1.1.
- **Symmetric rank 3** Symmetry of a rank 3 tensor is defined in OpenFOAM to mean that $P_{ijk} = P_{ikj} = P_{jik} = P_{jki} = P_{kij} = P_{kji}$ and therefore has 10 independent components. More specifically, it is formed by the outer product of 3 identical vectors, where the outer product operation is described in Section 1.3.4.

1.2.1 Tensor notation

This is a book on computational continuum mechanics that deals with problems involving complex PDEs in 3 spatial dimensions and in time. It is vital from the beginning to adopt a notation for the equations which is compact yet unambiguous. To make the equations easy to follow, we must use a notation that encapsulates the idea of a tensor as an entity in the own right, rather than a list of scalar components. Additionally, any tensor operation should be perceived as an operation on the entire tensor entity rather than a series of operations on its components.

Consequently, in this book the *tensor notation* is preferred in which any tensor of rank 1 and above, *i.e.* all tensors other than scalars, are represented by letters in bold face, *e.g.* a. This actively promotes the concept of a tensor as a entity in its own right since it is denoted by a single symbol, and it is also extremely compact. The potential drawback is that the rank of a bold face symbol is not immediately apparent, although it is clearly not zero. However, in practice this presents no real problem since we are aware of the property each symbol represents and therefore intuitively know its rank, *e.g.* we know velocity **U** is a tensor of rank 1.

A further, more fundamental idea regarding the choice of notation is that the mathematical representation of a tensor should not change depending on our coordinate system, i.e. the vector **a**is the same vector irrespective of where we view it from. The tensor notation supports this concept as it implies nothing about the coordinate system. However, other notations, e.g. a_i , expose the individual components of the tensor which naturally implies the choice of coordinate system. The unsatisfactory consequence of this is that the tensor is then represented by a set of values which are not unique — they depend on the coordinate system.

That said, the index notation, introduced in Section 1.2, is adopted from time to time in this book mainly to expand tensor operations into the constituent components. When using the index notation, we adopt the *summation convention* which states that whenever the same letter subscript occurs twice in a term, the that subscript is to be given all values, *i.e.* 1, 2, 3, and the results added together, *e.g.*

$$a_i b_i = \sum_{i=1}^3 a_i b_i = a_1 b_1 + a_2 b_2 + a_3 b_3 \tag{1.3}$$

In the remainder of the book the symbol \sum is omitted since the repeated subscript indicates the summation.

1.3 Algebraic tensor operations

This section describes all the algebraic operations for tensors that are available in Open-FOAM. Let us first review the most simple tensor operations: addition, subtraction, and scalar multiplication and division. Addition and subtraction are both commutative and associative and are only valid between tensors of the same rank. The operations are performed by addition/subtraction of respective components of the tensors, e.g. the subtraction of two vectors \mathbf{a} and \mathbf{b} is

$$\mathbf{a} - \mathbf{b} = a_i - b_i = (a_1 - b_1, a_2 - b_2, a_3 - b_3) \tag{1.4}$$

Multiplication of any tensor \mathbf{a} by a scalar s is also commutative and associative and is performed by multiplying all the tensor components by the scalar. For example,

$$s\mathbf{a} = sa_i = (sa_1, sa_2, sa_3)$$
 (1.5)

P-18 Tensor mathematics

Division between a tensor \mathbf{a} and a scalar is only relevant when the scalar is the second argument of the operation, *i.e.*

$$\mathbf{a}/s = a_i/s = (a_1/s, a_2/s, a_3/s) \tag{1.6}$$

Following these operations are a set of more complex products between tensors of rank 1 and above, described in the following Sections.

1.3.1 The inner product

The inner product operates on any two tensors of rank r_1 and r_2 such that the rank of the result $r = r_1 + r_2 - 2$. Inner product operations with tensors up to rank 3 are described below:

• The inner product of two vectors **a** and **b** is commutative and produces a scalar $s = \mathbf{a} \cdot \mathbf{b}$ where

$$s = a_i b_i = a_1 b_1 + a_2 b_2 + a_3 b_3 \tag{1.7}$$

• The inner product of a tensor \mathbf{T} and vector \mathbf{a} produces a vector $\mathbf{b} = \mathbf{T} \cdot \mathbf{a}$, represented below as a column array for convenience

$$b_{i} = T_{ij}a_{j} = \begin{pmatrix} T_{11}a_{1} + T_{12}a_{2} + T_{13}a_{3} \\ T_{21}a_{1} + T_{22}a_{2} + T_{23}a_{3} \\ T_{31}a_{1} + T_{32}a_{2} + T_{33}a_{3} \end{pmatrix}$$

$$(1.8)$$

It is non-commutative if **T** is non-symmetric such that $\mathbf{b} = \mathbf{a} \cdot \mathbf{T} = \mathbf{T}^{\mathrm{T}} \cdot \mathbf{a}$ is

$$b_{i} = a_{j}T_{ji} = \begin{pmatrix} a_{1}T_{11} + a_{2}T_{21} + a_{3}T_{31} \\ a_{1}T_{12} + a_{2}T_{22} + a_{3}T_{32} \\ a_{1}T_{13} + a_{2}T_{23} + a_{3}T_{33} \end{pmatrix}$$

$$(1.9)$$

• The inner product of two tensors ${\bf T}$ and ${\bf S}$ produces a tensor ${\bf P}={\bf T}\cdot{\bf S}$ whose components are evaluated as:

$$P_{ij} = T_{ik} S_{kj} \tag{1.10}$$

It is non-commutative such that $\mathbf{T} \cdot \mathbf{S} = (\mathbf{S}^T \cdot \mathbf{T}^T)^T$

• The inner product of a vector \mathbf{a} and third rank tensor \mathbf{P} produces a second rank tensor $\mathbf{T} = \mathbf{a} \cdot \mathbf{P}$ whose components are

$$T_{ij} = a_k P_{kij} (1.11)$$

Again this is non-commutative so that $\mathbf{T} = \mathbf{P} \cdot \mathbf{a}$ is

$$T_{ij} = P_{ijk}a_k \tag{1.12}$$

• The inner product of a second rank tensor T and third rank tensor P produces a third rank tensor $Q = T \cdot P$ whose components are

$$Q_{ijk} = T_{il}P_{lik} \tag{1.13}$$

Again this is non-commutative so that $\mathbf{Q} = \mathbf{P} \cdot \mathbf{T}$ is

$$Q_{ijk} = P_{ijl}T_{lk} \tag{1.14}$$

1.3.2 The double inner product of two tensors

The double inner product of two second-rank tensors T and S produces a scalar s = T : S which can be evaluated as the sum of the 9 products of the tensor components

$$s = T_{ij}S_{ij} = T_{11}S_{11} + T_{12}S_{12} + T_{13}S_{13} + T_{21}S_{21} + T_{22}S_{22} + T_{23}S_{23} + T_{31}S_{31} + T_{32}S_{32} + T_{33}S_{33}$$

$$(1.15)$$

The double inner product between a second rank tensor T and third rank tensor P produces a vector $\mathbf{a} = T \ P$ with components

$$a_i = T_{jk} P_{jki} (1.16)$$

This is non-commutative so that $\mathbf{a} = \mathbf{P} \cdot \mathbf{T}$ is

$$a_i = P_{ijk}T_{jk} \tag{1.17}$$

1.3.3 The triple inner product of two third rank tensors

The triple inner product of two third rank tensors \mathbf{P} and \mathbf{Q} produces a scalar $s = \mathbf{P} \, \mathbf{\hat{Q}}$ which can be evaluated as the sum of the 27 products of the tensor components

$$s = P_{ijk}Q_{ijk} (1.18)$$

1.3.4 The outer product

The outer product operates between vectors and tensors as follows:

• The outer product of two vectors \mathbf{a} and \mathbf{b} is non-commutative and produces a tensor $\mathbf{T} = \mathbf{a}\mathbf{b} = (\mathbf{b}\mathbf{a})^{\mathrm{T}}$ whose components are evaluated as:

$$T_{ij} = a_i b_j = \begin{pmatrix} a_1 b_1 & a_1 b_2 & a_1 b_3 \\ a_2 b_1 & a_2 b_2 & a_2 b_3 \\ a_3 b_1 & a_3 b_2 & a_3 b_3 \end{pmatrix}$$

$$(1.19)$$

• An outer product of a vector \mathbf{a} and second rank tensor \mathbf{T} produces a third rank tensor $\mathbf{P} = \mathbf{a}\mathbf{T}$ whose components are

$$P_{ijk} = a_i T_{jk} \tag{1.20}$$

This is non-commutative so that P = Ta produces

$$P_{ijk} = T_{ij}a_k (1.21)$$

1.3.5 The cross product of two vectors

The cross product operation is exclusive to vectors only. For two vectors \mathbf{a} with \mathbf{b} , it produces a vector $\mathbf{c} = \mathbf{a} \times \mathbf{b}$ whose components are

$$c_i = e_{ijk}a_ib_k = (a_2b_3 - a_3b_2, a_3b_1 - a_1b_3, a_1b_2 - a_2b_1)$$

$$(1.22)$$

where the *permutation symbol* is defined by

$$e_{ijk} = \begin{cases} 0 & \text{when any two indices are equal} \\ +1 & \text{when } i,j,k \text{ are an even permutation of } 1,2,3 \\ -1 & \text{when } i,j,k \text{ are an odd permutation of } 1,2,3 \end{cases}$$

$$(1.23)$$

in which the even permutations are 123, 231 and 312 and the odd permutations are 132, 213 and 321.

P-20 Tensor mathematics

1.3.6 Other general tensor operations

Some less common tensor operations and terminology used by OpenFOAM are described below.

Square of a tensor is defined as the outer product of the tensor with itself, e.g. for a vector \mathbf{a} , the square $\mathbf{a}^2 = \mathbf{a}\mathbf{a}$.

nth power of a tensor is evaluated by n outer products of the tensor, e.g. for a vector \mathbf{a} , the 3rd power $\mathbf{a}^3 = \mathbf{a}\mathbf{a}\mathbf{a}$.

Magnitude squared of a tensor is the rth inner product of the tensor of rank r with itself, to produce a scalar. For example, for a second rank tensor \mathbf{T} , $|\mathbf{T}|^2 = \mathbf{T} \cdot \mathbf{T}$.

Magnitude is the square root of the magnitude squared, e.g. for a tensor \mathbf{T} , $|\mathbf{T}| = \sqrt{\mathbf{T} \cdot \mathbf{T}}$. Vectors of unit magnitude are referred to as unit vectors.

Component maximum is the component of the tensor with greatest value, inclusive of sign, *i.e.* not the largest magnitude.

Component minimum is the component of the tensor with smallest value.

Component average is the mean of all components of a tensor.

Scale As the name suggests, the scale function is a tool for scaling the components of one tensor by the components of another tensor of the same rank. It is evaluated as the product of corresponding components of 2 tensors, *e.g.*, scaling vector **a** by vector **b** would produce vector **c** whose components are

$$c_i = \text{scale}(\mathbf{a}, \mathbf{b}) = (a_1 b_1, a_2 b_2, a_3 b_3)$$
 (1.24)

1.3.7 Geometric transformation and the identity tensor

A second rank tensor \mathbf{T} is strictly defined as a linear vector function, i.e. it is a function which associates an argument vector \mathbf{a} to another vector \mathbf{b} by the inner product $\mathbf{b} = \mathbf{T} \cdot \mathbf{a}$. The components of \mathbf{T} can be chosen to perform a specific geometric transformation of a tensor from the x, y, z coordinate system to a new coordinate system x^*, y^*, z^* ; \mathbf{T} is then referred to as the transformation tensor. While a scalar remains unchanged under a transformation, the vector \mathbf{a} is transformed to \mathbf{a}^* by

$$\mathbf{a}^* = \mathbf{T} \cdot \mathbf{a} \tag{1.25}$$

A second rank tensor S is transformed to S^* according to

$$\mathbf{S}^* = \mathbf{T} \cdot \mathbf{S} \cdot \mathbf{T}^{\mathrm{T}} \tag{1.26}$$

The *identity tensor* \mathbf{I} is defined by the requirement that it transforms another tensor onto itself. For all vectors \mathbf{a}

$$\mathbf{a} = \mathbf{I} \cdot \mathbf{a} \tag{1.27}$$

and therefore

$$\mathbf{I} = \delta_{ij} = \begin{pmatrix} 1 & 0 & 0 \\ 0 & 1 & 0 \\ 0 & 0 & 1 \end{pmatrix} \tag{1.28}$$

where δ_{ij} is known as the Kronecker delta symbol.

1.3.8 Useful tensor identities

Several identities are listed below which can be verified by under the assumption that all the relevant derivatives exist and are continuous. The identities are expressed for scalar s and vector \mathbf{a} .

$$\nabla \cdot (\nabla \times \mathbf{a}) \equiv 0$$

$$\nabla \times (\nabla s) \equiv \mathbf{0}$$

$$\nabla \cdot (s\mathbf{a}) \equiv s \nabla \cdot \mathbf{a} + \mathbf{a} \cdot \nabla s$$

$$\nabla \times (s\mathbf{a}) \equiv s \nabla \times \mathbf{a} + \nabla s \times \mathbf{a}$$

$$\nabla (\mathbf{a} \cdot \mathbf{b}) \equiv \mathbf{a} \times (\nabla \times \mathbf{b}) + \mathbf{b} \times (\nabla \times \mathbf{a}) + (\mathbf{a} \cdot \nabla) \mathbf{b} + (\mathbf{b} \cdot \nabla) \mathbf{a}$$

$$\nabla \cdot (\mathbf{a} \times \mathbf{b}) \equiv \mathbf{b} \cdot (\nabla \times \mathbf{a}) - \mathbf{a} \cdot (\nabla \times \mathbf{b})$$

$$\nabla \times (\mathbf{a} \times \mathbf{b}) \equiv \mathbf{a}(\nabla \cdot \mathbf{b}) - \mathbf{b}(\nabla \cdot \mathbf{a}) + (\mathbf{b} \cdot \nabla) \mathbf{a} - (\mathbf{a} \cdot \nabla) \mathbf{b}$$

$$\nabla \times (\nabla \times \mathbf{a}) \equiv \nabla(\nabla \cdot \mathbf{a}) - \nabla^2 \mathbf{a}$$

$$(\nabla \times \mathbf{a}) \times \mathbf{a} \equiv \mathbf{a} \cdot (\nabla \mathbf{a}) - \nabla(\mathbf{a} \cdot \mathbf{a})$$

It is sometimes useful to know the $e-\delta$ identity to help to manipulate equations in index notation:

$$e_{ijk}e_{irs} = \delta_{jr}\delta_{ks} - \delta_{js}\delta_{kr} \tag{1.30}$$

1.3.9 Operations exclusive to tensors of rank 2

There are several operations that manipulate the components of tensors of rank 2 that are listed below:

Transpose of a tensor $T = T_{ij}$ is $T^T = T_{ji}$ as described in Equation 1.2.

Symmetric and skew (antisymmetric) tensors As discussed in section 1.2, a tensor is said to be symmetric if its components are symmetric about the diagonal, i.e. $\mathbf{T} = \mathbf{T}^{\mathrm{T}}$. A skew or antisymmetric tensor has $\mathbf{T} = -\mathbf{T}^{\mathrm{T}}$ which intuitively implies that $T_{11} = T_{22} = T_{33} = 0$. Every second order tensor can be decomposed into symmetric and skew parts by

$$\mathbf{T} = \underbrace{\frac{1}{2}(\mathbf{T} + \mathbf{T}^{\mathrm{T}})}_{symmetric} + \underbrace{\frac{1}{2}(\mathbf{T} - \mathbf{T}^{\mathrm{T}})}_{skew} = \operatorname{symm} \mathbf{T} + \operatorname{skew} \mathbf{T}$$
(1.31)

Trace The trace of a tensor **T** is a scalar, evaluated by summing the diagonal components

$$\operatorname{tr} \mathbf{T} = T_{11} + T_{22} + T_{33} \tag{1.32}$$

 ${f Diagonal}$ returns a vector whose components are the diagonal components of the second rank tensor ${f T}$

$$\operatorname{diag} \mathbf{T} = (T_{11}, T_{22}, T_{33}) \tag{1.33}$$

Deviatoric and hydrostatic tensors Every second rank tensor \mathbf{T} can be decomposed into a deviatoric component, for which $\operatorname{tr} \mathbf{T} = 0$ and a hydrostatic component of the form $\mathbf{T} = s\mathbf{I}$ where s is a scalar. Every second rank tensor can be decomposed into deviatoric and hydrostatic parts as follows:

$$\mathbf{T} = \underbrace{\mathbf{T} - \frac{1}{3} (\operatorname{tr} \mathbf{T}) \mathbf{I}}_{deviatoric} + \underbrace{\frac{1}{3} (\operatorname{tr} \mathbf{T}) \mathbf{I}}_{hydrostatic} = \operatorname{dev} \mathbf{T} + \operatorname{hyd} \mathbf{T}$$
(1.34)

P-22 Tensor mathematics

Determinant The determinant of a second rank tensor is evaluated by

$$\det \mathbf{T} = \begin{vmatrix} T_{11} & T_{12} & T_{13} \\ T_{21} & T_{22} & T_{23} \\ T_{31} & T_{32} & T_{33} \end{vmatrix} = T_{11}(T_{22}T_{33} - T_{23}T_{32}) - T_{12}(T_{21}T_{33} - T_{23}T_{31}) + T_{13}(T_{21}T_{32} - T_{22}T_{31})$$

$$= \frac{1}{6}e_{ijk}e_{pqr}T_{ip}T_{jq}T_{kr}$$
(1.35)

Cofactors The *minors* of a tensor are evaluated for each component by deleting the row and column in which the component is situated and evaluating the resulting entries as a 2×2 determinant. For example, the minor of T_{12} is

$$\begin{vmatrix} T_{11} & T_{12} & T_{13} \\ T_{21} & T_{22} & T_{23} \\ T_{31} & T_{32} & T_{33} \end{vmatrix} = \begin{vmatrix} T_{21} & T_{23} \\ T_{31} & T_{33} \end{vmatrix} = T_{21}T_{33} - T_{23}T_{31}$$

$$(1.36)$$

The cofactors are *signed minors* where each minor is component is given a sign based on the rule

+ve if
$$i + j$$
 is even
-ve if $i + j$ is odd (1.37)

The cofactors of T can be evaluated as

$$\operatorname{cof} \mathbf{T} = \frac{1}{2} e_{jkr} e_{ist} T_{sk} T_{tr} \tag{1.38}$$

Inverse The inverse of a tensor can be evaluated as

$$\operatorname{inv} \mathbf{T} = \frac{\operatorname{cof} \mathbf{T}^{\mathrm{T}}}{\det \mathbf{T}} \tag{1.39}$$

Hodge dual of a tensor is a vector whose components are

$$*\mathbf{T} = (T_{23}, -T_{13}, T_{12}) \tag{1.40}$$

1.3.10 Operations exclusive to scalars

OpenFOAM supports most of the well known functions that operate on scalars, e.g. square root, exponential, logarithm, sine, cosine etc.., a list of which can be found in Table 1.2. There are 3 additional functions defined within OpenFOAM that are described below:

Sign of a scalar s is

$$\operatorname{sgn}(s) = \begin{cases} 1 & \text{if } s \ge 0, \\ -1 & \text{if } s < 0. \end{cases}$$
 (1.41)

Positive of a scalar s is

$$pos(s) = \begin{cases} 1 & \text{if } s \ge 0, \\ 0 & \text{if } s < 0. \end{cases}$$
 (1.42)

Limit of a scalar s by the scalar n

$$\lim_{n \to \infty} \lim_{n \to \infty} f(s, n) = \begin{cases} s & \text{if } s < n, \\ 0 & \text{if } s \ge n. \end{cases} \tag{1.43}$$

1.4 OpenFOAM tensor classes

OpenFOAM contains a C++ class library primitive that contains the classes for the tensor mathematics described so far. The basic tensor classes that are available as standard in OpenFOAM are listed in Table 1.1. The Table also lists the functions that allow the user to access individual components of a tensor, known as access functions.

Rank	Common name	Basic class	Access functions
0	Scalar	scalar	
1	Vector	vector	x(), y(), z()
2	Tensor	tensor	xx(), xy(), xz()

Table 1.1: Basic tensor classes in OpenFOAM

We can declare the tensor

$$\mathbf{T} = \begin{pmatrix} 1 & 2 & 3 \\ 4 & 5 & 6 \\ 7 & 8 & 9 \end{pmatrix} \tag{1.44}$$

in OpenFOAM by the line:

We can then access the component T_{13} , or T_{xz} using the xz() access function. For instance the code

outputs to the screen:

Txz = 3

1.4.1 Algebraic tensor operations in OpenFOAM

The algebraic operations described in Section 1.3 are all available to the OpenFOAM tensor classes using syntax which closely mimics the notation used in written mathematics. Some functions are represented solely by descriptive functions, e.g.symm(), but others can also be executed using symbolic operators, e.g.*. All functions are listed in Table 1.2.

Operation	Comment	Mathematical	Description
		Description	in OpenFOAM
Addition		a + b	a + b
Subtraction		a - b	a - b
Scalar multiplication		$s\mathbf{a}$	s * a
Scalar division		\mathbf{a}/s	a / s
Outer product	$rank \ \mathbf{a}, \mathbf{b} >= 1$	ab	a * b
Inner product	$rank \ \mathbf{a}, \mathbf{b} >= 1$	a•b	a & b
Double inner product	$rank \mathbf{a}, \mathbf{b} >= 2$	a:b	a && b
Cross product	$rank \ \mathbf{a}, \mathbf{b} = 1$	$\mathbf{a} \times \mathbf{b}$	a ^ b
Square		\mathbf{a}^2	sqr(a)
		Cox	ntinued on next page

P-24 Tensor mathematics

Continued from previous page			
Operation	Comment	Mathematical	Description
		Description	in OpenFOAM
Magnitude squared		$ \mathbf{a} ^2$	magSqr(a)
Magnitude		$ \mathbf{a} $	mag(a)
Power	n = 0, 1,, 4	\mathbf{a}^n	pow(a,n)
Component average	i = 1,, N	$\overline{a_i}$	cmptAv(a)
Component maximum	i = 1,, N	$\max(a_i)$	max(a)
Component minimum	i = 1,, N	$\min(a_i)$	min(a)
Scale		$scale(\mathbf{a}, \mathbf{b})$	scale(a,b)
Geometric transformation	transforms \mathbf{a} u	sing tensor T	<pre>transform(T,a)</pre>
Operations exclusive to tens	sors of rank 2		
Transpose		\mathbf{T}^{T}	T.T()
Diagonal		$\operatorname{diag}\mathbf{T}$	diag(T)
Trace		$\operatorname{tr} \mathbf{T}$	tr(T)
Deviatoric component		$\operatorname{dev} \mathbf{T}$	dev(T)
Symmetric component		$\operatorname{symm} \mathbf{T}$	symm(T)
Skew-symmetric component		$\operatorname{skew} \mathbf{T}$	skew(T)
Determinant		$\det \mathbf{T}$	det(T)
Cofactors		$\cot \mathbf{T}$	cof(T)
Inverse		$\operatorname{inv} \mathbf{T}$	inv(T)
Hodge dual		* T	*T
Troage dawr		_	•
Operations exclusive to scal	ars		
Sign (boolean)		$\operatorname{sgn}(s)$	sign(s)
Positive (boolean)		s >= 0	pos(s)
Negative (boolean)		s < 0	neg(s)
Limit	n scalar	$\lim_{\longrightarrow} \operatorname{t}(s,n)$	<pre>limit(s,n)</pre>
Square root		\sqrt{s}	sqrt(s)
Exponential		$\exp s$	exp(s)
Natural logarithm		$\ln s$	log(s)
Base 10 logarithm		$\log_{10} s$	log10(s)
Sine		$\sin s$	sin(s)
Cosine		$\cos s$	cos(s)
Tangent		$\tan s$	tan(s)
Arc sine		$a\sin s$	asin(s)
Arc cosine		$a\cos s$	acos(s)
Arc tangent		a tan s	atan(s)
Hyperbolic sine		$\sinh s$	sinh(s)
Hyperbolic cosine		$\cosh s$	cosh(s)
Hyperbolic tangent		$\tanh s$	tanh(s)
Hyperbolic arc sine		a s inh s	asinh(s)
Hyperbolic arc cosine		$\operatorname{acosh} s$	acosh(s)
Hyperbolic arc tangent		$\operatorname{atanh} s$	atanh(s)
Error function		$\operatorname{erf} s$	erf(s)
Complement error function		$\operatorname{erfc} s$	erfc(s)
Logarithm gamma function		$\ln \Gamma s$	lgamma(s)
Type 1 Bessel function of order	0	$J_0 s$	j0(s)
Type 1 Bessel function of order	1	$J_1 s$	j1(s)
		Con	tinued on next page

1.5 Dimensional units P-25

Continued from previous page						
Operation	Comment	Mathematical	Description			
		Description	in OpenFOAM			
Type 2 Bessel function of order	0	$Y_0 s$	y0(s)			
Type 2 Bessel function of order	1	$Y_1 s$	y1(s)			

a, b are tensors of arbitrary rank unless otherwise stated

Table 1.2: Algebraic tensor operations in OpenFOAM

1.5 Dimensional units

In continuum mechanics, properties are represented in some chosen units, e.g. mass in kilograms (kg), volume in cubic metres (m³), pressure in Pascals (kg m s⁻²). Algebraic operations must be performed on these properties using consistent units of measurement; in particular, addition, subtraction and equality are only physically meaningful for properties of the same dimensional units. As a safeguard against implementing a meaningless operation, OpenFOAM encourages the user to attach dimensional units to any tensor and will then perform dimension checking of any tensor operation.

Units are defined using the dimensionSet class, e.g.

dimensionSet pressureDims(1, -1, -2, 0, 0, 0, 0);

No.	Property	Unit	Symbol
1	Mass	kilogram	k
2	Length	metre	m
3	Time	second	S
4	Temperature	Kelvin	K
5	Quantity	moles	mol
6	Current	ampere	A
7	Luminous intensity	candela	cd

Table 1.3: S.I. base units of measurement

where each of the values corresponds to the power of each of the S.I. base units of measurement listed in Table 1.3. The line of code declares pressureDims to be the dimensionSet for pressure $kg\,m\,s^{-2}$ since the first entry in the pressureDims array, 1, corresponds to k^1 , the second entry, -1, corresponds to m^{-1} etc.. A tensor with units is defined using the dimensioned<Type> template class, the <Type> being scalar, vector, tensor, etc.. The dimensioned<Type> stores a variable name of class word, the value <Type> and a dimensionSet

```
dimensionedTensor sigma
   (
        "sigma",
        dimensionSet(1, -1, -2, 0, 0, 0, 0),
        tensor(1e6,0,0,0,1e6,0,0,0,1e6),
   );
```

s is a scalar, N is the number of tensor components

P-26 Tensor mathematics

creates a tensor with correct dimensions of pressure, or stress

$$\sigma = \begin{pmatrix} 10^6 & 0 & 0 \\ 0 & 10^6 & 0 \\ 0 & 0 & 10^6 \end{pmatrix} \tag{1.45}$$

Chapter 2

Discretisation procedures

So far we have dealt with algebra of tensors at a point. The PDEs we wish to solve involve derivatives of tensors with respect to time and space. We therefore need to extend our description to a tensor field, i.e. a tensor that varies across time and spatial domains. In this Chapter we will first present a mathematical description of all the differential operators we may encounter. We will then show how a tensor field is constructed in OpenFOAM and how the derivatives of these fields are discretised into a set of algebraic equations.

2.1 Differential operators

Before defining the spatial derivatives we first introduce the nabla vector operator ∇ , represented in index notation as ∂_i :

$$\nabla \equiv \partial_i \equiv \frac{\partial}{\partial x_i} \equiv \left(\frac{\partial}{\partial x_1}, \frac{\partial}{\partial x_2}, \frac{\partial}{\partial x_3}\right) \tag{2.1}$$

The nabla operator is a useful notation that obeys the following rules:

- it operates on the tensors to its right and the conventional rules of a derivative of a product, e.g. $\partial_i ab = (\partial_i a) b + a (\partial_i b)$;
- otherwise the nabla operator behaves like any other vector in an algebraic operation.

2.1.1 Gradient

If a scalar field s is defined and continuously differentiable then the gradient of s, ∇s is a vector field

$$\nabla s = \partial_i s = \left(\frac{\partial s}{\partial x_1}, \frac{\partial s}{\partial x_2}, \frac{\partial s}{\partial x_3}\right) \tag{2.2}$$

The gradient can operate on any tensor field to produce a tensor field that is one rank higher. For example, the gradient of a vector field **a** is a second rank tensor field

$$\nabla \mathbf{a} = \partial_i a_j = \begin{pmatrix} \partial a_1 / \partial x_1 & \partial a_2 / \partial x_1 & \partial a_3 / \partial x_1 \\ \partial a_1 / \partial x_2 & \partial a_2 / \partial x_2 & \partial a_3 / \partial x_2 \\ \partial a_1 / \partial x_3 & \partial a_2 / \partial x_3 & \partial a_3 / \partial x_3 \end{pmatrix}$$
(2.3)

2.1.2 Divergence

If a vector field \mathbf{a} is defined and continuously differentiable then the divergence of \mathbf{a} is a scalar field

$$\nabla \cdot \mathbf{a} = \partial_i a_i = \frac{\partial a_1}{\partial x_1} + \frac{\partial a_2}{\partial x_2} + \frac{\partial a_3}{\partial x_3}$$
 (2.4)

The divergence can operate on any tensor field of rank 1 and above to produce a tensor that is one rank lower. For example the divergence of a second rank tensor field **T** is a vector field (expanding the vector as a column array for convenience)

$$\nabla \cdot \mathbf{T} = \partial_i T_{ij} = \begin{pmatrix} \partial T_{11}/\partial x_1 + \partial T_{12}/\partial x_1 + \partial T_{13}/\partial x_1 \\ \partial T_{21}/\partial x_2 + \partial T_{22}/\partial x_2 + \partial T_{23}/\partial x_2 \\ \partial T_{31}/\partial x_3 + \partial T_{32}/\partial x_3 + \partial T_{33}/\partial x_3 \end{pmatrix}$$
(2.5)

2.1.3 Curl

If a vector field **a** is defined and continuously differentiable then the curl of **a**, $\nabla \times \mathbf{a}$ is a vector field

$$\nabla \times \mathbf{a} = e_{ijk} \partial_j a_k = \left(\frac{\partial a_3}{\partial x_2} - \frac{\partial a_2}{\partial x_3}, \frac{\partial a_1}{\partial x_3} - \frac{\partial a_3}{\partial x_1}, \frac{\partial a_2}{\partial x_1} - \frac{\partial a_1}{\partial x_2} \right)$$
(2.6)

The curl is related to the gradient by

$$\nabla \times \mathbf{a} = 2 \,(* \,\mathrm{skew} \,\nabla \mathbf{a}) \tag{2.7}$$

2.1.4 Laplacian

The Laplacian is an operation that can be defined mathematically by a combination of the divergence and gradient operators by $\nabla^2 \equiv \nabla \cdot \nabla$. However, the Laplacian should be considered as a single operation that transforms a tensor field into another tensor field of the same rank, rather than a combination of two operations, one which raises the rank by 1 and one which reduces the rank by 1.

In fact, the Laplacian is best defined as a *scalar operator*, just as we defined nabla as a vector operator, by

$$\nabla^2 \equiv \partial^2 \equiv \frac{\partial^2}{\partial x_1^2} + \frac{\partial^2}{\partial x_2^2} + \frac{\partial^2}{\partial x_3^2}$$
 (2.8)

For example, the Laplacian of a scalar field s is the scalar field

$$\nabla^2 s = \partial^2 s = \frac{\partial^2 s}{\partial x_1^2} + \frac{\partial^2 s}{\partial x_2^2} + \frac{\partial^2 s}{\partial x_3^2}$$
 (2.9)

2.1.5 Temporal derivative

There is more than one definition of temporal, or time, derivative of a tensor. To describe the temporal derivatives we must first recall that the tensor relates to a property of a volume of material that may be moving. If we track an infinitesimally small volume of material, or particle, as it moves and observe the change in the tensorial property ϕ in time, we have the *total*, or *material* time derivative denoted by

$$\frac{D\phi}{Dt} = \lim_{\Delta t \to 0} \frac{\Delta\phi}{\Delta t} \tag{2.10}$$

However in continuum mechanics, particularly fluid mechanics, we often observe the change of a ϕ in time at a fixed point in space as different particles move across that point. This change at a point in space is termed the *spatial* time derivative which is denoted by $\partial/\partial t$ and is related to the material derivative by:

$$\frac{D\phi}{Dt} = \frac{\partial\phi}{\partial t} + \mathbf{U} \cdot \nabla\phi \tag{2.11}$$

where **U** is the velocity field of property ϕ . The second term on the right is known as the convective rate of change of ϕ .

2.2 Overview of discretisation

The term discretisation means approximation of a problem into discrete quantities. The FV method and others, such as the finite element and finite difference methods, all discretise the problem as follows:

Spatial discretisation Defining the solution domain by a set of points that fill and bound a region of space when connected;

Temporal discretisation (For transient problems) dividing the time domain into into a finite number of time intervals, or steps;

Equation discretisation Generating a system of algebraic equations in terms of discrete quantities defined at specific locations in the domain, from the PDEs that characterise the problem.

2.2.1 OpenFOAM lists and fields

OpenFOAM frequently needs to store sets of data and perform functions, such as mathematical operations, on the data. OpenFOAM therefore provides an array template class List<Type>, making it possible to create a list of any object of class Type that inherits the functions of the Type. For example a List of vector is List<vector>.

Lists of the tensor classes are defined as standard in OpenFOAM by the template class Field<Type>. For better code legibility, all instances of Field<Type>, e.g.Field<vector>, are renamed using typedef declarations as scalarField, vectorField, tensorField, symmTensor-Field, tensorThirdField and symmTensorThirdField. Algebraic operations can be performed between Fields subject to obvious restrictions such as the fields having the same number of elements. OpenFOAM also supports operations between a field and single tensor, e.g. all values of a Field U can be multiplied by the scalar 2 with the operation U = 2.0 * U.

2.3 Discretisation of the solution domain

Discretisation of the solution domain is shown in Figure 2.1. The space domain is discretised into computational mesh on which the PDEs are subsequently discretised. Discretisation of time, if required, is simple: it is broken into a set of time steps Δt that may change during a numerical simulation, perhaps depending on some condition calculated during the simulation.

On a more detailed level, discretisation of space requires the subdivision of the domain into a number of cells, or control volumes. The cells are contiguous, *i.e.* they do not overlap one another and completely fill the domain. A typical cell is shown in Figure 2.2.

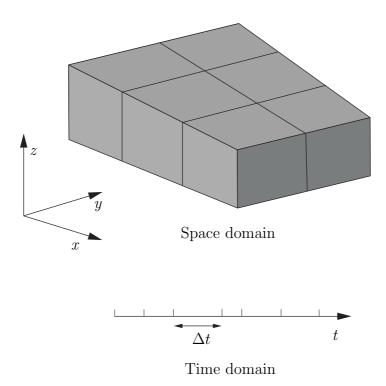


Figure 2.1: Discretisation of the solution domain




Figure 2.2: Parameters in finite volume discretisation

Dependent variables and other properties are principally stored at the cell centroid P although they may be stored on faces or vertices. The cell is bounded by a set of flat faces, given the generic label f. In OpenFOAM there is no limitation on the number of faces bounding each cell, nor any restriction on the alignment of each face. This kind of mesh is often referred to as "arbitrarily unstructured" to differentiate it from meshes in which the cell faces have a prescribed alignment, typically with the coordinate axes. Codes with arbitrarily unstructured meshes offer greater freedom in mesh generation and manipulation in particular when the geometry of the domain is complex or changes over time.

Whilst most properties are defined at the cell centroids, some are defined at cell faces. There are two types of cell face.

Internal faces Those faces that connect two cells (and it can never be more than two). For each internal face, OpenFOAM designates one adjoining cell to be the face owner and the other to be the neighbour;

Boundary faces Those belonging to one cell since they coincide with the boundary of the domain. These faces simply have an owner cell.

2.3.1 Defining a mesh in OpenFOAM

There are different levels of mesh description in OpenFOAM, beginning with the most basic mesh class, named polyMesh since it is based on polyhedra. A polyMesh is constructed using the minimum information required to define the mesh geometry described below and presented in Figure 2.3:

Points A list of cell vertex point coordinate vectors, *i.e.* a vectorField, that is renamed pointField using a typedef declaration;


Faces A list of cell faces List<face>, or faceList, where the face class is defined by a list of vertex numbers, corresponding to the pointField;

Cells a list of cells List<cell>, or cellList, where the cell class is defined by a list of face numbers, corresponding to the faceList described previously.

Boundary a polyBoundaryMesh decomposed into a list of patches, polyPatchList representing different regions of the boundary. The boundary is subdivided in this manner to allow different boundary conditions to be specified on different patches during a solution. All the faces of any polyPatch are stored as a single block of the faceList, so that its faces can be easily accessed using the slice class which stores references to the first and last face of the block. Each polyPatch is then constructed from

- a slice;
- a word to assign it a name.

FV discretisation uses specific data that is derived from the mesh geometry stored in polyMesh. OpenFOAM therefore extends the polyMesh class to fvMesh which stores the additional data needed for FV discretisation. fvMesh is constructed from polyMesh and stores the data in Table 2.1 which can be updated during runtime in cases where the mesh moves, is refined etc..



pointField
...
Internal
...
Boundary
...
Boundary
polyPatchList
Patch 1
Patch 2
Patch 3

Figure 2.3: Schematic of the basic mesh description used in OpenFOAM

2.3.2 Defining a geometricField in OpenFOAM

So far we can define a field, *i.e.* a list of tensors, and a mesh. These can be combined to define a tensor field relating to discrete points in our domain, specified in OpenFOAM by the template class <code>geometricField<Type></code>. The Field values are separated into those defined within the internal region of the domain, *e.g.* at the cell centres, and those defined on the domain boundary, *e.g.* on the boundary faces. The <code>geometricField<Type></code> stores the following information:

Internal field This is simply a Field<Type>, described in Section 2.2.1;

BoundaryField This is a GeometricBoundaryField, in which a Field is defined for the faces of each patch and a Field is defined for the patches of the boundary. This is then a field of fields, stored within an object of the FieldField<Type> class. A reference to the fvBoundaryMesh is also stored [**].

Mesh A reference to an fvMesh, with some additional detail as to the whether the field is defined at cell centres, faces, etc..

Dimensions A dimensionSet, described in Section 4.2.6.

Old values Discretisation of time derivatives requires field data from previous time steps. The geometricField<Type> will store references to stored fields from the previous, or old, time step and its previous, or old-old, time step where necessary.

Class	Description	Symbol	Access function
volScalarField	Cell volumes	V	V()
surfaceVectorField	Face area vectors	\mathbf{S}_f	Sf()
surfaceScalarField	Face area magnitudes	$ \mathbf{S}_f $	magSf()
volVectorField	Cell centres	\mathbf{C}	C()
surfaceVectorField	Face centres	\mathbf{C}_f	Cf()
surfaceScalarField	Face motion fluxes **	ϕ_g	phi()

Table 2.1: fvMesh stored data.

Previous iteration values The iterative solution procedures can use under-relaxation which requires access to data from the previous iteration. Again, if required, geometricField<Type> stores a reference to the data from the previous iteration.

As discussed in Section 2.3, we principally define a property at the cell centres but quite often it is stored at the cell faces and on occasion it is defined on cell vertices. The geometricField<Type> is renamed using typedef declarations to indicate where the field variable is defined as follows:

volField<Type> A field defined at cell centres;

surfaceField<Type> A field defined on cell faces;

pointField<Type> A field defined on cell vertices.

These typedef field classes of geometricField<Type>are illustrated in Figure 2.4. A geometricField<Type> inherits all the tensor algebra of Field<Type> and has all operations subjected to dimension checking using the dimensionSet. It can also be subjected to the FV discretisation procedures described in the following Section. The class structure used to build geometricField<Type> is shown in Figure 2.5¹.

2.4 Equation discretisation

Equation discretisation converts the PDEs into a set of algebraic equations that are commonly expressed in matrix form as:

$$[A][x] = [b] \tag{2.12}$$

where [A] is a square matrix, [x] is the column vector of dependent variable and [b] is the source vector. The description of [x] and [b] as 'vectors' comes from matrix terminology rather than being a precise description of what they truly are: a list of values defined at locations in the geometry, i.e. a geometricField<Type>, or more specifically a volField<Type> when using FV discretisation.

[A] is a list of coefficients of a set of algebraic equations, and cannot be described as a geometricField<Type>. It is therefore given a class of its own: fvMatrix. fvMatrix<Type> is created through discretisation of a geometric<Type>Field and therefore inherits the <Type>. It supports many of the standard algebraic matrix operations of addition +, subtraction - and multiplication *.

Each term in a PDE is represented individually in OpenFOAM code using the classes of static functions finiteVolumeMethod and finiteVolumeCalculus, abbreviated by a typedef

¹The diagram is not an exact description of the class hierarchy, rather a representation of the general structure leading from some primitive classes to geometric<Type>Field.

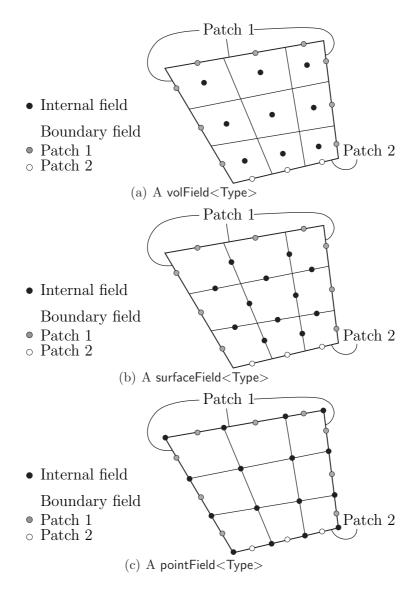


Figure 2.4: Types of geometricField<Type> defined on a mesh with 2 boundary patches (in 2 dimensions for simplicity)

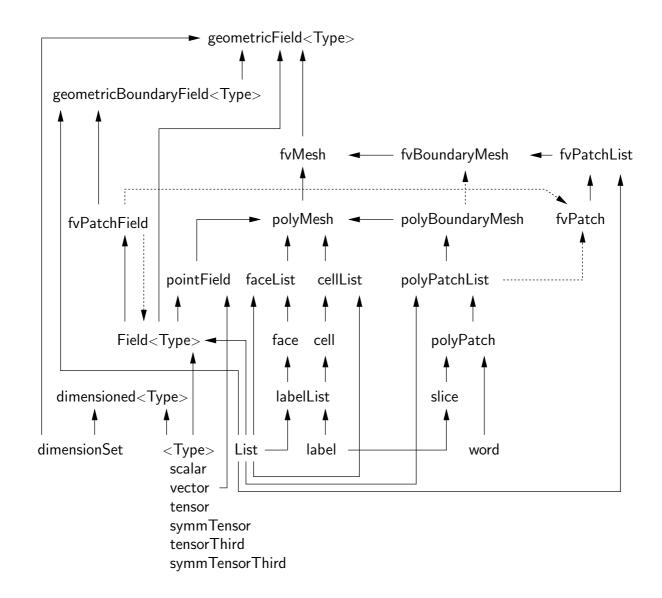


Figure 2.5: Basic class structure leading to geometricField<Type>

to fvm and fvc respectively. fvm and fvc contain static functions, representing differential operators, e.g. ∇^2 , $\nabla \cdot$ and $\partial/\partial t$, that discretise geometricField<Type>s. The purpose of defining these functions within two classes, fvm and fvc, rather than one, is to distinguish:

- functions of fvm that calculate implicit derivatives of and return an fvMatrix<Type>
- some functions of fvc that calculate explicit derivatives and other explicit calculations, returning a geometricField<Type>.

Figure 2.6 shows a geometricField<Type> defined on a mesh with 2 boundary patches and illustrates the explicit operations merely transform one field to another and drawn in 2D for simplicity.

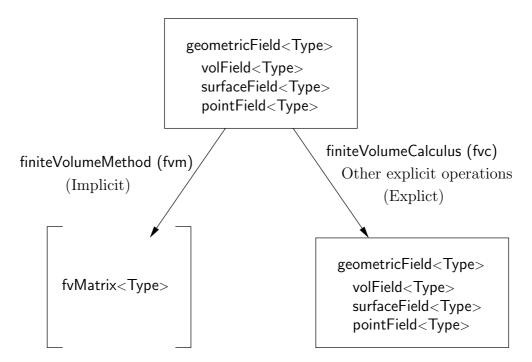


Figure 2.6: A geometricField<Type> and its operators

Table 2.2 lists the main functions that are available in fvm and fvc to discretise terms that may be found in a PDE. FV discretisation of each term is formulated by first integrating the term over a cell volume V. Most spatial derivative terms are then converted to integrals over the cell surface S bounding the volume using Gauss's theorem

$$\int_{V} \nabla \star \phi \ dV = \int_{S} d\mathbf{S} \star \phi \tag{2.13}$$

where **S** is the surface area vector, ϕ can represent any tensor field and the star notation \star is used to represent any tensor product, *i.e.* inner, outer and cross and the respective derivatives: divergence $\nabla \cdot \phi$, gradient $\nabla \phi$ and $\nabla \times \phi$. Volume and surface integrals are then linearised using appropriate schemes which are described for each term in the following Sections. Some terms are always discretised using one scheme, a selection of schemes is offered in OpenFOAM for the discretisation of other terms. The choice of scheme is either made by a direct specification within the code or it can be read from an input file at job run-time and stored within an fvSchemes class object.

Term description	Implicit /	Text	fvm::/fvc:: functions
T 1 '	Explicit	expression	
Laplacian	Imp/Exp	$ abla^2 \phi$	laplacian(phi)
		$\nabla \cdot \Gamma \nabla \phi$	laplacian(Gamma, phi)
Time derivative	Imp/Exp	$\frac{\partial \phi}{\partial t}$	ddt(phi)
		$\frac{\partial \rho \phi}{\partial t}$	ddt(rho,phi)
Second time derivative	Imp/Exp	$\frac{\partial}{\partial t} \left(\rho \frac{\partial \phi}{\partial t} \right)$	d2dt2(rho, phi)
Convection	Imp/Exp	$\nabla \cdot (\psi)$	div(psi,scheme)*
		$\nabla \cdot (\psi \phi)$	div(psi, phi, word)*
			div(psi, phi)
Divergence	Exp	$\nabla \cdot \chi$	div(chi)
Gradient	Exp	$\nabla \chi$	grad(chi)
		$ abla \phi$	gGrad(phi)
			lsGrad(phi)
			snGrad(phi)
			snGradCorrection(phi)
Grad-grad squared	Exp	$ \nabla\nabla\phi ^2$	sqrGradGrad(phi)
Curl	Exp	$\nabla \times \phi$	curl(phi)
Source	Imp	$\rho\phi$	Sp(rho,phi)
	$Imp/Exp\dagger$		SuSp(rho,phi)

†fvm::SuSp source is discretised implicit or explicit depending on the sign of rho. †An explicit source can be introduced simply as a vol<Type>Field, e.g.rho*phi. Function arguments can be of the following classes:

phi: vol<Type>Field

Gamma: scalar volScalarField, surfaceScalarField, volTensorField, surfaceTensorField.

rho: scalar, volScalarField psi: surfaceScalarField.

 ${\tt chi: surface}{<} {\sf Type}{>} {\sf Field}, \ {\sf vol}{<} {\sf Type}{>} {\sf Field}.$

Table 2.2: Discretisation of PDE terms in OpenFOAM

2.4.1 The Laplacian term

The Laplacian term is integrated over a control volume and linearised as follows:

$$\int_{V} \nabla \cdot (\Gamma \nabla \phi) \ dV = \int_{S} d\mathbf{S} \cdot (\Gamma \nabla \phi) = \sum_{f} \Gamma_{f} \mathbf{S}_{f} \cdot (\nabla \phi)_{f}$$
(2.14)

The face gradient discretisation is implicit when the length vector \mathbf{d} between the centre of the cell of interest P and the centre of a neighbouring cell N is orthogonal to the face plane, *i.e.* parallel to \mathbf{S}_f :

$$\mathbf{S}_f \bullet (\nabla \phi)_f = |S_f| \frac{\phi_N - \phi_P}{|\mathbf{d}|} \tag{2.15}$$

In the case of non-orthogonal meshes, an additional explicit term is introduced [?] which is evaluated by interpolating cell centre gradients, themselves calculated by central differencing cell centre values.

2.4.2 The convection term

The convection term is integrated over a control volume and linearised as follows:

$$\int_{V} \nabla \cdot (\rho \mathbf{U} \phi) \ dV = \int_{S} d\mathbf{S} \cdot (\rho \mathbf{U} \phi) = \sum_{f} \mathbf{S}_{f} \cdot (\rho \mathbf{U})_{f} \phi_{f} = \sum_{f} F \phi_{f}$$
 (2.16)

The face field ϕ_f can be evaluated using a variety of schemes:

Central differencing (CD) is second-order accurate but unbounded

$$\phi_f = f_x \phi_P + (1 - f_x)\phi_N \tag{2.17}$$

where $f_x \equiv \overline{fN}/\overline{PN}$ where \overline{fN} is the distance between f and cell centre N and \overline{PN} is the distance between cell centres P and N.

Upwind differencing (UD) determines ϕ_f from the direction of flow and is bounded at the expense of accuracy

$$\phi_f = \begin{cases} \phi_P & \text{for } F \ge 0\\ \phi_N & \text{for } F < 0 \end{cases} \tag{2.18}$$

Blended differencing (BD) schemes combine UD and CD in an attempt to preserve boundedness with reasonable accuracy,

$$\phi_f = (1 - \gamma) \left(\phi_f\right)_{UD} + \gamma \left(\phi_f\right)_{CD} \tag{2.19}$$

OpenFOAM has several implementations of the Gamma differencing—scheme to select the blending coefficient γ [?] but it offers other well-known schemes such as van Leer, SUPERBEE, MINMOD etc..

2.4.3 First time derivative

The first time derivative $\partial/\partial t$ is integrated over a control volume as follows:

$$\frac{\partial}{\partial t} \int_{V} \rho \phi \ dV \tag{2.20}$$

The term is discretised by simple differencing in time using:

new values $\phi^n \equiv \phi(t + \Delta t)$ at the time step we are solving for;

old values $\phi^o \equiv \phi(t)$ that were stored from the previous time step;

old-old values $\phi^{oo} \equiv \phi(t - \Delta t)$ stored from a time step previous to the last.

One of two discretisation schemes can be declared using the timeScheme keyword in the appropriate input file, described in detail in section 4.4 of the User Guide.

Euler implicit scheme, timeScheme EulerImplicit, that is first order accurate in time:

$$\frac{\partial}{\partial t} \int_{V} \rho \phi \ dV = \frac{(\rho_P \phi_P V)^n - (\rho_P \phi_P V)^o}{\Delta t}$$
 (2.21)

Backward differencing scheme, timeScheme BackwardDifferencing, that is second order accurate in time by storing the old-old values and therefore with a larger overhead in data storage than EulerImplicit:

$$\frac{\partial}{\partial t} \int_{V} \rho \phi \ dV = \frac{3 \left(\rho_{P} \phi_{P} V\right)^{n} - 4 \left(\rho_{P} \phi_{P} V\right)^{o} + \left(\rho_{P} \phi_{P} V\right)^{oo}}{2\Delta t} \tag{2.22}$$

2.4.4 Second time derivative

The second time derivative is integrated over a control volume and linearised as follows:

$$\frac{\partial}{\partial t} \int_{V} \rho \frac{\partial \phi}{\partial t} dV = \frac{(\rho_P \phi_P V)^n - 2(\rho_P \phi_P V)^o + (\rho_P \phi_P V)^{oo}}{\Delta t^2}$$
(2.23)

It is first order accurate in time.

2.4.5 Divergence

The divergence term described in this Section is strictly an explicit term that is distinguished from the convection term of Section 2.4.2, *i.e.* in that it is not the divergence of the product of a velocity and dependent variable. The term is integrated over a control volume and linearised as follows:

$$\int_{V} \nabla \cdot \phi \ dV = \int_{S} d\mathbf{S} \cdot \phi = \sum_{f} \mathbf{S}_{f} \cdot \phi_{f}$$
(2.24)

The fvc::div function can take as its argument either a surface<Type>Field, in which case ϕ_f is specified directly, or a vol<Type>Field which is interpolated to the face by central differencing as described in Section 2.4.10:

2.4.6 Gradient

The gradient term is an explicit term that can be evaluated in a variety of ways. The scheme can be evaluated either by selecting the particular grad function relevant to the discretisation scheme, e.g.fvc::gGrad, fvc::lsGrad etc., or by using the fvc::grad function combined with the appropriate timeScheme keyword in an input file

Gauss integration is invoked using the fvc::grad function with timeScheme Gauss or directly using the fvc::gGrad function. The discretisation is performed using the standard method of applying Gauss's theorem to the volume integral:

$$\int_{V} \nabla \phi \ dV = \int_{S} d\mathbf{S} \, \phi = \sum_{f} \mathbf{S}_{f} \phi_{f} \tag{2.25}$$

As with the fvc::div function, the Gaussian integration fvc::grad function can take either a surfaceField<Type> or a volField<Type> as an argument.

Least squares method is based on the following idea:

- 1. a value at point P can be extrapolated to neighbouring point N using the gradient at P;
- 2. the extrapolated value at N can be compared to the actual value at N, the difference being the error;
- 3. if we now minimise the sum of the square of weighted errors at all neighbours of P with the respect to the gradient, then the gradient should be a good approximation.

Least squares is invoked using the fvc::grad function with timeScheme leastSquares or directly using the fvc::lsGrad function. The discretisation is performed as by first calculating the tensor G at every point P by summing over neighbours N:

$$\mathbf{G} = \sum_{N} w_{N}^{2} \mathbf{dd} \tag{2.26}$$

where **d** is the vector from P to N and the weighting function $w_N = 1/|\mathbf{d}|$. The gradient is then evaluated as:

$$(\nabla \phi)_P = \sum_N w_N^2 \mathbf{G}^{-1} \cdot \mathbf{d} (\phi_N - \phi_P)$$
 (2.27)

Surface normal gradient The gradient normal to a surface $\mathbf{n}_f \cdot (\nabla \phi)_f$ can be evaluated at cell faces using the scheme

$$(\nabla \phi)_f = \frac{\phi_N - \phi_P}{|\mathbf{d}|} \tag{2.28}$$

This gradient is called by the function fvc::snGrad and returns a surfaceField<Type>. The scheme is directly analogous to that evaluated for the Laplacian discretisation scheme in Section 2.4.1, and in the same manner, a correction can be introduced to improve the accuracy of this face gradient in the case of non-orthogonal meshes. This correction is called using the function fvc::snGradCorrection [Check**].

2.4.7 Grad-grad squared

The grad-grad squared term is evaluated by: taking the gradient of the field; taking the gradient of the resulting gradient field; and then calculating the magnitude squared of the result. The mathematical expression for grad-grad squared of ϕ is $|\nabla (\nabla \phi)|^2$.

2.4.8 Curl

The curl is evaluated from the gradient term described in Section 2.4.6. First, the gradient is discretised and then the curl is evaluated using the relationship from Equation 2.7, repeated here for convenience

$$\nabla \times \phi = 2 * (\text{skew } \nabla \phi)$$

2.4.9 Source terms

Source terms can be specified in 3 ways

Explicit Every explicit term is a volField<Type>. Hence, an explicit source term can be incorporated into an equation simply as a field of values. For example if we wished to solve Poisson's equation $\nabla^2 \phi = f$, we would define phi and f as volScalarField and then do

Implicit An implicit source term is integrated over a control volume and linearised by

$$\int_{V} \rho \phi \ dV = \rho_P V_P \phi_P \tag{2.29}$$

Implicit/Explicit The implicit source term changes the coefficient of the diagonal of the matrix. Depending on the sign of the coefficient and matrix terms, this will either increase or decrease diagonal dominance of the matrix. Decreasing the diagonal dominance could cause instability during iterative solution of the matrix equation. Therefore OpenFOAM provides a mixed source discretisation procedure that is implicit when the coefficients that are greater than zero, and explicit for the coefficients less than zero. In mathematical terms the matrix coefficient for node P is $V_P \max(\rho_P, 0)$ and the source term is $V_P \phi_P \min(\rho_P, 0)$.

2.4.10 Other explicit discretisation schemes

There are some other discretisation procedures that convert volField<Type>s into surface<Type>Fields and visa versa.

Surface integral fvc::surfaceIntegrate performs a summation of surface<Type>Field face values bounding each cell and dividing by the cell volume, i.e. $(\sum_f \phi_f)/V_P$. It returns a volField<Type>.

Surface sum fvc::surfaceSum performs a summation of surface<Type>Field face values bounding each cell, i.e. $\sum_f \phi_f$ returning a volField<Type>.

Average fvc::average produces an area weighted average of surface<Type>Field face values, i.e. $(\sum_f S_f \phi_f) / \sum_f S_f$, and returns a volField<Type>.

Reconstruct

Face interpolate The geometric<Type>Field function faceInterpolate() interpolates volField<Type> cell centre values to cell faces using central differencing, returning a surface<Type>Field.

2.5 Temporal discretisation

Although we have described the discretisation of temporal derivatives in Sections 2.4.3 and 2.4.4, we need to consider how to treat the spatial derivatives in a transient problem. If we denote all the spatial terms as $\mathcal{A}\phi$ where \mathcal{A} is any spatial operator, e.g. Laplacian, then we can express a transient PDE in integral form as

$$\int_{t}^{t+\Delta t} \left[\frac{\partial}{\partial t} \int_{V} \rho \phi \ dV + \int_{V} \mathcal{A}\phi \ dV \right] \ dt = 0$$
 (2.30)

Using the Euler implicit method of Equation 2.21, the first term can be expressed as

$$\int_{t}^{t+\Delta t} \left[\frac{\partial}{\partial t} \int_{V} \rho \phi \ dV \right] dt = \int_{t}^{t+\Delta t} \frac{(\rho_{P} \phi_{P} V)^{n} - (\rho_{P} \phi_{P} V)^{o}}{\Delta t} dt$$

$$= \frac{(\rho_{P} \phi_{P} V)^{n} - (\rho_{P} \phi_{P} V)^{o}}{\Delta t} \Delta t \tag{2.31}$$

The second term can be expressed as

$$\int_{t}^{t+\Delta t} \left[\int_{V} \mathcal{A}\phi \ dV \right] \ dt = \int_{t}^{t+\Delta t} \mathcal{A}^{*}\phi \ dt \tag{2.32}$$

where \mathcal{A}^* represents the spatial discretisation of \mathcal{A} . The time integral can be discretised in three ways:

Euler implicit uses implicit discretisation of the spatial terms, thereby taking current values ϕ^n .

$$\int_{t}^{t+\Delta t} \mathcal{A}^* \phi \ dt = \mathcal{A}^* \phi^n \Delta t \tag{2.33}$$

It is first order accurate in time, guarantees boundedness and is unconditionally stable.

Explicit uses explicit discretisation of the spatial terms, thereby taking old values ϕ^o .

$$\int_{t}^{t+\Delta t} \mathcal{A}^* \phi \ dt = \mathcal{A}^* \phi^o \Delta t \tag{2.34}$$

It is first order accurate in time and is unstable if the Courant number Co is greater than 1. The Courant number is defined as

$$Co = \frac{\mathbf{U}_f \cdot \mathbf{d}}{|\mathbf{d}|^2 \Delta t} \tag{2.35}$$

where \mathbf{U}_f is a characteristic velocity, e.g. velocity of a wave front, velocity of flow.

Crank Nicholson uses the trapezoid rule to discretise the spatial terms, thereby taking a mean of current values ϕ^n and old values ϕ^o .

$$\int_{t}^{t+\Delta t} \mathcal{A}^* \phi \ dt = \mathcal{A}^* \left(\frac{\phi^n + \phi^o}{2} \right) \Delta t \tag{2.36}$$

It is second order accurate in time, is unconditionally stable but does not guarantee boundedness.

2.5.1 Treatment of temporal discretisation in OpenFOAM

At present the treatment of the temporal discretisation is controlled by the implementation of the spatial derivatives in the PDE we wish to solve. For example, let us say we wish to solve a transient diffusion equation

$$\frac{\partial \phi}{\partial t} = \kappa \nabla^2 \phi \tag{2.37}$$

An Euler implicit implementation of this would read

```
solve(fvm::ddt(phi) == kappa*fvm::laplacian(phi))
```

where we use the fvm class to discretise the Laplacian term implicitly. An explicit implementation would read

```
solve(fvm::ddt(phi) == kappa*fvc::laplacian(phi))
```

where we now use the fvc class to discretise the Laplacian term explicitly. The Crank Nicholson scheme can be implemented by the mean of implicit and explicit terms:

```
solve
   (
   fvm::ddt(phi)
   ==
   kappa*0.5*(fvm::laplacian(phi) + fvc::laplacian(phi))
)
```

2.6 Boundary Conditions

Boundary conditions are required to complete the problem we wish to solve. We therefore need to specify boundary conditions on all our boundary faces. Boundary conditions can be divided into 2 types:

Dirichlet prescribes the value of the dependent variable on the boundary and is therefore termed 'fixed value' in this guide;

Neumann prescribes the gradient of the variable normal to the boundary and is therefore termed 'fixed gradient' in this guide.

When we perform discretisation of terms that include the sum over faces \sum_f , we need to consider what happens when one of the faces is a boundary face.

Fixed value We specify a fixed value at the boundary ϕ_b

- We can simply substitute ϕ_b in cases where the discretisation requires the value on a boundary face ϕ_f , e.g. in the convection term in Equation 2.16.
- In terms where the face gradient $(\nabla \phi)_f$ is required, e.g. Laplacian, it is calculated using the boundary face value and cell centre value,

$$\mathbf{S}_f \bullet (\nabla \phi)_f = |S_f| \frac{\phi_b - \phi_P}{|\mathbf{d}|} \tag{2.38}$$

Fixed gradient The fixed gradient boundary condition g_b is a specification on inner product of the gradient and unit normal to the boundary, or

$$g_b = \left(\frac{\mathbf{S}}{|\mathbf{S}|} \bullet \nabla \phi\right)_f \tag{2.39}$$

• When discretisation requires the value on a boundary face ϕ_f we must interpolate the cell centre value to the boundary by

$$\phi_f = \phi_P + \mathbf{d} \cdot (\nabla \phi)_f$$

$$= \phi_P + |\mathbf{d}| q_h$$
(2.40)

• ϕ_b can be directly substituted in cases where the discretisation requires the face gradient to be evaluated,

$$\mathbf{S}_f \bullet (\nabla \phi)_f = |S_f| \, g_b \tag{2.41}$$

2.6.1 Physical boundary conditions

The specification of boundary conditions is usually an engineer's interpretation of the true behaviour. Real boundary conditions are generally defined by some physical attributes rather than the numerical description as described of the previous Section. In incompressible fluid flow there are the following physical boundaries

Inlet The velocity field at the inlet is supplied and, for consistency, the boundary condition on pressure is zero gradient.

Outlet The pressure field at the outlet is supplied and a zero gradient boundary condition on velocity is specified.

No-slip impermeable wall The velocity of the fluid is equal to that of the wall itself, *i.e.* a fixed value condition can be specified. The pressure is specified zero gradient since the flux through the wall is zero.

In a problem whose solution domain and boundary conditions are symmetric about a plane, we only need to model half the domain to one side of the symmetry plane. The boundary condition on the plane must be specified according to

Symmetry plane The symmetry plane condition specifies the component of the gradient normal to the plane should be zero. [Check**]

Chapter 3

Examples of the use of OpenFOAM

In this section we shall describe several test cases supplied with the OpenFOAM distribution. The intention is to provide example cases, including those in the tutorials in chapter 2 of the User Guide, for every standard solver. The examples are designed to introduce certain tools and features of OpenFOAM, e.g. within pre-/post-processing, numerical schemes, algorithms. They also provide a means for validation of solvers although that is not their principal function.

Each example contains a description of the problem: the geometry, initial and boundary conditions, a brief description of the equations being solved, models used, and physical properties required. The solution domain is selected which may be a portion of the original geometry, e.g. if we introduce symmetry planes. The method of meshing, usually blockMesh, is specified; of course the user can simply view the mesh since every example is distributed with the polyMesh directory containing the data files that describe the mesh.

The examples coexist with the tutorials in the *tutorials* subdirectory of the OpenFOAM installation. They are organised into a set of subdirectories by solver, *e.g.* all the icoFoam cases are stored within a subdirectory *icoFoam*. Before running a particular example, the user is urged to copy it into their user account. We recommend that the user stores all OpenFOAM cases in a directory we recommend that the tutorials are copied into a directory *\$FOAM_RUN*. If this directory structure has not yet been created in the user's account, it can be created with

```
mkdir -p $FOAM_RUN
```

The tutorials can then be copied into this directory with

```
cp -r $FOAM_TUTORIALS/* $FOAM_RUN
```

3.1 Flow around a cylinder

In this example we shall investigate potential flow around a cylinder using potentialFoam. This example introduces the following OpenFOAM features:

- non-orthogonal meshes;
- generating an analytical solution to a problem in OpenFOAM.

3.1.1 Problem specification

The problem is defined as follows:

Solution domain The domain is 2 dimensional and consists of a square domain with a cylinder collocated with the centre of the square as shown in Figure 3.1.

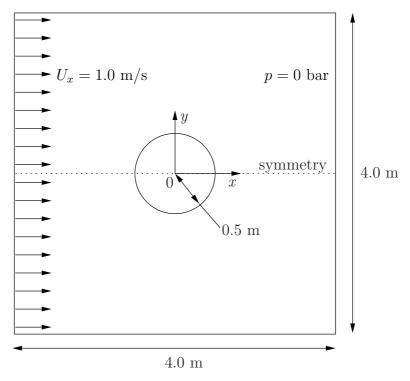


Figure 3.1: Geometry of flow round a cylinder

Governing equations

• Mass continuity for an incompressible fluid

$$\nabla \cdot \mathbf{U} = 0 \tag{3.1}$$

• Pressure equation for an incompressible, irrotational fluid assuming steadystate conditions

$$\nabla^2 p = 0 \tag{3.2}$$

Boundary conditions

- Inlet (left) with fixed velocity U = (1, 0, 0) m/s.
- Outlet (right) with a fixed pressure p = 0 Pa.
- No-slip wall (bottom);
- Symmetry plane (top).

Initial conditions U = 0 m/s, p = 0 Pa — required in OpenFOAM input files but not necessary for the solution since the problem is steady-state.

Solver name potentialFoam: a potential flow code, *i.e.* assumes the flow is incompressible, steady, irrotational, inviscid and it ignores gravity.

Case name cylinder case located in the \$FOAM_TUTORIALS/potentialFoam directory.

3.1.2 Note on potentialFoam

potentialFoam is a useful solver to validate OpenFOAM since the assumptions of potential flow are such that an analytical solution exists for cases whose geometries are relatively simple. In this example of flow around a cylinder an analytical solution exists with which we can compare our numerical solution. potentialFoam can also be run more like a utility to provide a (reasonably) conservative initial U field for a problem. When running certain cases, this can useful for avoiding instabilities due to the initial field being unstable. In short, potentialFoam creates a conservative field from a non-conservative initial field supplied by the user.

3.1.3 Mesh generation

Mesh generation using blockMesh has been described in tutorials in the User Guide. In this case, the mesh consists of 10 blocks as shown in Figure 3.2. Remember that all

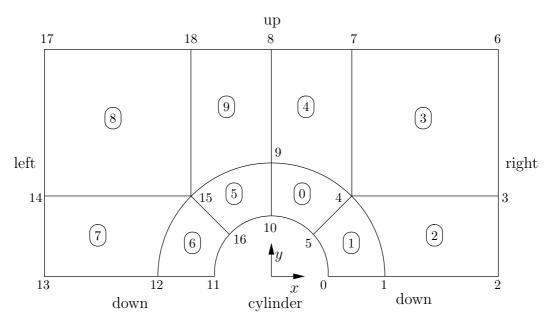


Figure 3.2: Blocks in cylinder geometry

meshes are treated as 3 dimensional in OpenFOAM. If we wish to solve a 2 dimensional problem, we must describe a 3 dimensional mesh that is only one cell thick in the third direction that is not solved. In Figure 3.2 we show only the back plane of the geometry, along z = -0.5, in which the vertex numbers are numbered 0-18. The other 19 vertices in the front plane, z = +0.5, are numbered in the same order as the back plane, as shown in the mesh description file below:

```
2
                    ield
                                      OpenFOAM: The Open Source CFD Toolbox
3
                   O peration
                                      Version:
                                                 http://www.OpenFOAM.org
5
                   A nd
                                      Web:
                   M anipulation
6
    FoamFile
                      2.0;
10
         version
         format
                      ascii;
11
                      dictionary
         class
                      blockMeshDict
13
         object
14
15
16
    convertToMeters 1;
```

```
18
       vertices
 19
20
              (0.5 \ 0 \ -0.5)
21
              (0.5 0 -0.5)

(1 0 -0.5)

(2 0 -0.5)

(2 0.707107 -0.5)

(0.707107 0.707107 -0.5)

(0.353553 0.353553 -0.5)

(2 2 -0.5)
22
23
24
25
26
              (2 2 -0.5)
(0.707107 2 -0.5)
27
28
                 2 -0.5)
1 -0.5)
              (0
29
              Õ)
30
              (0 0.5 -0.5)
(-0.5 0 -0.5)
(-1 0 -0.5)
31
32
33
              (-2\ 0\ -0.5)
34
              (-2 0.707107 -0.5)
(-0.707107 0.707107 -0.5)
35
36
              (-0.353553 0.353553 -0.5)
(-2 2 -0.5)
37
38
              (-0.707107 2 -0.5)
(0.5 0 0.5)
39
40
              (1 0 0.5)
(2 0 0.5)
(2 0.7071
41
              (2 0 0.5)
(2 0.707107 0.5)
(0.707107 0.707107 0.5)
(0.353553 0.353553 0.5)
42
43
44
45
                  20.5)
46
              (0.707107 2 0.5)
47
              ()
(0)
                 2 0.5)
48
 49
              (0\ 0.5\ 0.5)
50
              (-0.5 0 0.5)
(-1 0 0.5)
51
              (-2 0 0.5)
(-2 0.707107 0.5)
(-0.707107 0.707107 0.5)
53
              (-0.353553 0.353553 0.5)
(-2 2 0.5)
 56
              (-0.707107 2 0.5)
       );
 59
       blocks
             hex (5 4 9 10 24 23 28 29) (10 10 1) simpleGrading (1 1 1)
 63
             hex (0 1 4 5 19 20 23 24) (10 10 1) simpleGrading (1 1 1)
64
             hex (1 2 3 4 20 21 22 23) (20 10 1) simpleGrading (1 1 1)
 65
             hex (4 3 6 7 23 22 25 26) (20 20 1) simpleGrading (1 1 1)
 66
                                                      (10 20 1) simpleGrading (1 1 1)
             hex (9 4 7 8 28 23 26 27)
67
             hex (15 16 10 9 34 35 29 28) (10 10 1) simpleGrading (1 1 1)
 68
             hex (12 11 16 15 31 30 35 34) (10 10 1) simpleGrading (1 1 1)
69
             hex (13 12 15 14 32 31 34 33) (20 10 1) simpleGrading (1 1 1)
70
             hex (14 15 18 17 33 34 37 36) (20 20 1) simpleGrading (1 1 1)
71
             hex (15 9 8 18 34 28 27 37) (10 20 1) simpleGrading (1 1 1)
72
       );
73
75
       edges
76
             arc 0 5 (0.469846 0.17101 -0.5)
arc 5 10 (0.17101 0.469846 -0.5)
 77
78
             arc 1 4 (0.939693 0.34202 -0.5)
arc 4 9 (0.34202 0.939693 -0.5)
arc 19 24 (0.469846 0.17101 0.5)
arc 24 29 (0.17101 0.469846 0.5)
79
80
81
82
             arc 20 23 (0.939693 0.34202 0.5)

arc 23 28 (0.34202 0.939693 0.5)

arc 11 16 (-0.469846 0.17101 -0.5)

arc 16 10 (-0.17101 0.469846 -0.5)

arc 12 15 (-0.939693 0.34202 -0.5)
 83
84
 85
86
87
             arc 15 9 (-0.34202 0.939693 -0.5)
arc 30 35 (-0.469846 0.17101 0.5)
88
                   30 35
35 29
 89
                              (-0.17101 \ 0.469846 \ 0.5)
90
             arc
                              (-0.939693 0.34202
                    31
             arc
91
             arc 34 28
                             (-0.34202 0.939693 0.5)
92
       );
93
94
       patches
95
96
             symmetryPlane down
 97
98
                    (0 1 20 19)
(1 2 21 20)
(12 11 30 31)
99
100
101
```

```
(13 12 31 32)
102
103
           patch right
104
105
                 (2 3 22 21)
(3 6 25 22)
106
107
108
           symmetryPlane up
109
110
                 (7 8 27 26)
(6 7 26 25)
(8 18 37 27)
111
112
113
                 (18 17 36 37)
114
115
           patch left
116
117
                 (14 13 32 33)
(17 14 33 36)
118
119
120
           symmetryPlane cylinder
121
122
                 (10 5 24 29)
(5 0 19 24)
(16 10 29 35)
(11 16 35 30)
123
124
125
126
           )
127
      );
128
129
      mergePatchPairs
130
131
132
133
                                         134
```

3.1.4 Boundary conditions and initial fields

Using FoamX or editing case files by hand, set the boundary conditions in accordance with the problem description in Figure 3.1, *i.e.* the left boundary should be an Inlet, the right boundary should be an Outlet and the down and cylinder boundaries should be symmetryPlane. The top boundary conditions is chosen so that we can make the most genuine comparison with our analytical solution which uses the assumption that the domain is infinite in the y direction. The result is that the normal gradient of U is small along a plane coinciding with our boundary. We therefore impose the condition that the normal component is zero, *i.e.* specify the boundary as a symmetryPlane, thereby ensuring that the comparison with the analytical is reasonable.

3.1.5 Running the case

No fluid properties need be specified in this problem since the flow is assumed to be incompressible and inviscid. In the *system* subdirectory, the *controlDict* specifies the control parameters for the run. Note that since we assume steady flow, we only run for 1 time step:

```
--*- C++ -*---
1
2
                   F ield
                                      OpenFOAM: The Open Source CFD Toolbox
3
                   {\tt O} peration
4
                                      Version:
                                                 1.5
                                                 http://www.OpenFOAM.org
                   A nd
                                      Web:
5
                   M anipulation
6
    FoamFile
         version
                      2.0;
         format
                      ascii;
                      dictionary;
12
                      controlDict;
13
14
15
16
    application potentialFoam;
17
18
```

```
startTime;
19
    startFrom
20
    startTime
                        0;
21
22
                        endTime;
23
    stopAt
24
    endTime
                        1;
25
26
    deltaT
                        1;
27
28
    writeControl
                       timeStep;
29
30
    writeInterval
                        1;
31
32
    purgeWrite
                        0:
33
34
    writeFormat
35
                        ascii:
36
37
    writePrecision
                       6;
38
    writeCompression uncompressed;
39
40
    timeFormat
41
                        general;
42
    timePrecision
43
44
    runTimeModifiable yes;
45
46
```

potentialFoam executes an iterative loop around the pressure equation which it solves in order that explicit terms relating to non-orthogonal correction in the Laplacian term may be updated in successive iterations. The number of iterations around the pressure equation is controlled by the nNonOrthogonalCorrectors keyword in controlDict. In the first instance we can set nNonOrthogonalCorrectors to 0 so that no loops are performed, i.e. the pressure equation is solved once, and there is no non-orthogonal correction. The solution is shown in Figure 3.3(a) (at t=1, when the steady-state simulation is complete). We expect the solution to show smooth streamlines passing across the domain as in the analytical solution in Figure 3.3(c), yet there is clearly some error in the regions where there is high non-orthogonality in the mesh, e.g. at the join of blocks 0, 1 and 3. The case can be run a second time with some non-orthogonal correction by setting nNonOrthogonalCorrectors to 3. The solution shows smooth streamlines with no significant error due to non-orthogonality as shown in Figure 3.3(b).

3.1.6 Generating the analytical solution

Source code is included in the $FOAM_TUTORIALS/potentialFoam/analyticalCylinder$ directory to generate the analytical solution for the potential flow case. The velocity at any point at a distance d and angle θ from the cylinder centre is described analytically as

$$U_x = U_\infty \left[1 - \left(\frac{r}{d} \right)^2 \cos 2\theta \right]$$

$$U_y = U_\infty \left(\frac{r}{d} \right)^2 \sin 2\theta \quad (3.3)$$

where r is the cylinder radius and U_{∞} is the inlet flow velocity. Here, θ describes the angle subtended from the x-axis.

Let us examine some details of the source code in the <code>analyticalCylinder</code> directory. In <code>createFields.H</code>, the velocity field is read in using the <code>IOobject::NO_WRITE</code> option to ensure that the field data can never be overwritten during execution of <code>analyticalCylinder</code>. The inlet velocity and cylinder radius are taken from data read from the mesh and a field <code>UA</code> is set up to store the analytical solution:

```
Info<< "Reading field U\n" << endl; volVectorField U
```

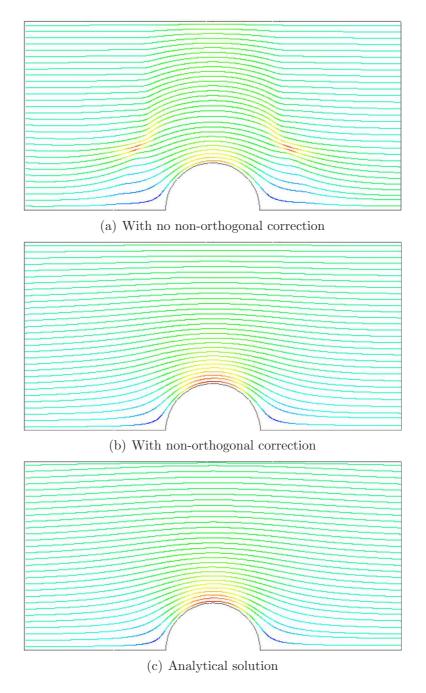


Figure 3.3: Streamlines of potential flow

```
3
          IOobject
4
5
          (
                "U"
6
               runTime.timeName(),
               mesh, IOobject::MUST_READ,
9
                IOobject::NO_WRITE
10
11
12
          mesh
     );
13
14
     Info<< "Reading inlet velocity uInfX\n" << endl;</pre>
     dimensionedScalar uInfX
17
18
          "uInfx"
19
          dimensionSet(0, 1, -1, 0, 0 U.boundaryField()[3][0].x()
20
21
22
     Info << "U at inlet = " << uInfX.value() << " m/s" << endl;</pre>
23
24
     dimensionedScalar radius
25
26
27
          "radius"
          dimensionSet(0, 1, 0, 0, 0), mag(U.mesh().boundary()[4].Cf()[0])
28
29
30
     );
31
     Info << "Cylinder radius = " << radius.value() << " m" << endl;</pre>
33
34
     volVectorField UA
35
          IOobject
36
37
38
               runTime.timeName(),
39
               mesh,
IOobject::NO_READ,
IOobject::AUTO_WRITE
40
41
42
43
          ),
U
44
     );
```

Thea main code *analyticalCylinder.C* performs the following tasks:

- increments the time step by runTime++;
- generates the analytical solution for field UA using tensor arithmetic;
- writes the solution to file by runTime.writeObjects().

```
F ield
                                                       OpenFOAM: The Open Source CFD Toolbox
 3
                           O peration
 4
                            A nd
                                                       Copyright (C) 1991-2008 OpenCFD Ltd.
                           M anipulation
6
      License
             This file is part of OpenFOAM.
9
10
             <code>OpenFOAM</code> is free software; you can redistribute it and/or modify it under the terms of the \tt GNU General Public License as published by the
11
12
             Free Software Foundation; either version 2 of the License, or (at your
13
             option) any later version.
14
15
             OpenFOAM is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU General Public License
                                                                                                              but WITHOUT
16
17
18
19
             for more details.
20
             You should have received a copy of the GNU General Public License along with OpenFOAM; if not, write to the Free Software Foundation, Inc., 51 Franklin St, Fifth Floor, Boston, MA 02110-1301 USA
21
22
23
24
      Application analyticalCylinder
25
26
27
      Description
28
             Generates an analytical solution for potential flow around a cylinder.
29
```

```
Can be compared with the solution from the potentialFlow/cylinder example.
31
32
33
   #include "fvCFD.H"
34
35
36
   37
38
   int main(int argc, char *argv[])
39
40
41
       include "setRootCase.H"
42
43
       include "createTime.H"
include "createMesh.H"
44
45
       include "createFields.H"
46
47
   48
50
       Info << "\nEvaluating analytical solution" << endl;</pre>
       volVectorField centres = UA.mesh().C();
       volScalarField magCentres = mag(centres);
       volScalarField theta = acos((centres & vector(1,0,0))/magCentres);
54
55
       volVectorField cs2theta =
   cos(2*theta)*vector(1,0,0)
56
57
         + sin(2*theta)*vector(0,1,0);
58
59
       UA = uInfX*(dimensionedVector(vector(1,0,0))
60
         - pow((radius/magCentres),2)*cs2theta);
61
62
       runTime.write();
63
64
       Info<< "end" << endl;</pre>
65
66
       return(0);
67
68
69
```

The utility must be compiled with wmake as normal. It can then be run by typing

```
analyticalCylinder $FOAM_RUN/potentialFoam cylinder
```

The analytical solution is plotted as streamlines as shown in Figure 3.3(c). Note that differences in the analytical and numerical solutions at the top plane are due to the fact that the analytical solution assumes an infinite boundary and the numerical solution specifies a zeroGradient boundary condition at that boundary.

3.1.7 Exercise

Investigate the accuracy of the numerical solution by implementing some measure of comparison between the numerical and analytical in analyticalCylinder.

3.2 Steady turbulent flow over a backward-facing step

In this example we shall investigate steady turbulent flow over a backward-facing step. The problem description is taken from one used by Pitz and Daily in an experimental investigation [**] against which the computed solution can be compared. This example introduces the following OpenFOAM features for the first time:

- generation of a mesh using blockMesh using full mesh grading capability;
- steady turbulent flow.

3.2.1 Problem specification

The problem is defined as follows:

Solution domain The domain is 2 dimensional, consisting of a short inlet, a backward-facing step and converging nozzle at outlet as shown in Figure 3.4.

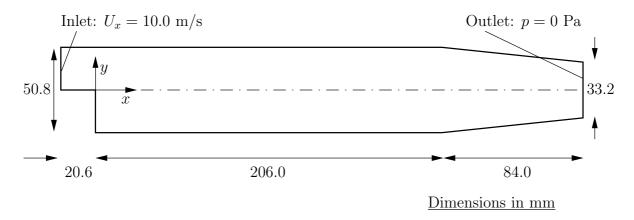


Figure 3.4: Geometry of backward-facing step

Governing equations

• Mass continuity for incompressible flow

$$\nabla \cdot \mathbf{U} = 0 \tag{3.4}$$

• Steady flow momentum equation

$$\nabla \cdot (\mathbf{U}\mathbf{U}) + \nabla \cdot \mathbf{R} = -\nabla p \tag{3.5}$$

where p is kinematic pressure and (in slightly over-simplistic terms) $\mathbf{R} = \nu_{eff} \nabla \mathbf{U}$ is the viscous stress term with an effective kinematic viscosity ν_{eff} , calculated from selected transport and turbulence models.

Initial conditions U = 0 m/s, p = 0 Pa — required in OpenFOAM input files but not necessary for the solution since the problem is steady-state.

Boundary conditions

- Inlet (left) with fixed velocity U = (10, 0, 0) m/s;
- Outlet (right) with fixed pressure p = 0 Pa;
- No-slip walls on other boundaries.

Transport properties

• Kinematic viscosity of air $\nu = \mu/\rho = 18.1 \times 10^{-6}/1.293 = 14.0 \ \mu m^2/s$

$Turbulence\ model$

- Standard $k \epsilon$;
- Coefficients: $C_{\mu} = 0.09$; $C_1 = 1.44$; $C_2 = 1.92$; $\alpha_k = 1$; $\alpha_{\epsilon} = 0.76923$.

Solver name simpleFoam: an implementation for steady incompressible flow.

Case name pitzDaily, located in the \$FOAM_TUTORIALS/simpleFoam directory.

The problem is solved using simpleFoam, so-called as it is an implementation for steady flow using the SIMPLE algorithm [**]. The solver has full access to all the turbulence models in the incompressibleTurbulenceModels library and the non-Newtonian models incompressibleTransportModels library of the standard OpenFOAM release.

3.2.2 Mesh generation

We expect that the flow in this problem is reasonably complex and an optimum solution will require grading of the mesh. In general, the regions of highest shear are particularly critical, requiring a finer mesh than in the regions of low shear. We can anticipate where high shear will occur by considering what the solution might be in advance of any calculation. At the inlet we have strong uniform flow in the x direction and, as it passes over the step, it generates shear on the fluid below, generating a vortex in the bottom half of the domain. The regions of high shear will therefore be close to the centreline of the domain and close to the walls.

The domain is subdivided into 12 blocks as shown in Figure 3.5.

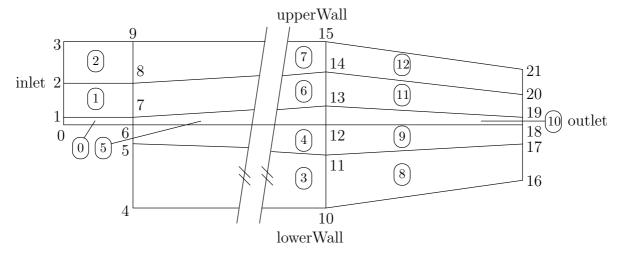


Figure 3.5: Blocks in backward-facing step

The mesh is 3 dimensional, as always in OpenFOAM, so in Figure 3.5 we are viewing the back plane along z = -0.5. The full set of vertices and blocks are given in the mesh description file below:

```
2
                                           OpenFOAM: The Open Source CFD Toolbox
                     F ield
3
                     O peration
                                           Version:
4
                                                       http://www.OpenFOAM.org
                     A nd
                                           Web:
                     M anipulation
6
     FoamFile
8
                         2.0;
          version
10
                         ascii;
11
          format
                         dictionary
12
                         blockMeshĎict;
13
          object
14
15
16
     convertToMeters 0.001;
17
18
     vertices
19
20
            -20.6 0 -0.5)
-20.6 3 -0.5)
-20.6 12.7 -0.5)
21
22
23
```

```
(-20.6 25.4 -0.5)

(0 -25.4 -0.5)

(0 -5 -0.5)

(0 0 -0.5)

(0 3 -0.5)

(0 12.7 -0.5)

(0 25.4 -0.5)

(206 -25.4 -0.5)

(206 -8.5 -0.5)

(206 0 -0.5)
 24
 25
26
27
28
 29
30
31
32
33
             (206 0 -0.5)
(206 6.5 -0.5)
(206 17 -0.5)
(206 25.4 -0.5)
(290 -16.6 -0.5)
(290 -6.3 -0.5)
34
35
36
                    -16.6 -0.5)
-6.3 -0.5)
37
38
              (290 \ 0 \ -0.5)
39
             (290 4.5 -0.5)
(290 11 -0.5)
(290 16.6 -0.5)
40
41
42
             (-20.6 0 0.5)
(-20.6 3 0.5)
(-20.6 12.7 0.5)
(-20.6 25.4 0.5)
43
44
45
             (-20.6 25.4 0.5)
(0 -25.4 0.5)
(0 -5 0.5)
(0 0 0.5)
(0 3 0.5)
(0 12.7 0.5)
(0 25.4 0.5)
(206 -25.4 0.5)
(206 -8.5 0.5)
(206 0 0.5)
(206 6.5 0.5)
(206 17 0.5)
(206 25.4 0.5)
(290 -16.6 0.5)
46
47
48
 49
50
51
 52
 53
 54
 55
 56
 57
 58
              (290 -16.6 0.5)
(290 -6.3 0.5)
 59
 60
              (290\ 0\ 0.5)
 61
             (290 4.5 0.5)
(290 11 0.5)
 62
 63
              (290 16.6 0.5)
       );
 65
 66
       blocks
             hex (0 6 7 1 22 28 29 23) (18 7 1) simpleGrading (0.5 1.8 1)
 69
             hex (1 7 8 2 23 29 30 24) (18 10 1) simpleGrading (0.5 4 1)
70
 71
             hex (2 8 9 3 24 30 31 25) (18 13 1) simpleGrading (0.5 0.25 1)
             hex (4 10 11 5 26 32 33 27) (180 18 1) simpleGrading (4 1 1)
 72
                                                        (180 9 1) edgeGrading (\bar{4} 4 4 4 0.5 1 1 0.5 1 1 1 1)
             hex (5 11 12 6 27
                                        33 34 28)
 73
             hex (6 12 13 7
                                    28 34
                                                 29)
                                                       (180 7 1) edgeGrading (4 4 4 4 1.8 1 1 1.8 1 1 1
 74
                                             35
             hex (7 13 14 8 29 35 36 30) (180 10 1) edgeGrading (4 4 4 4 4 1 1 4 1 1 1 1)
75
             hex (8 14 15 9 30 36 37 31) (180 13 1) simpleGrading (4 0.25 1)
76
             hex (10 16 17 11 32 38 39 33) (25 18 1) simpleGrading (2.5 1 1)
 77
             hex (11 17 18 12 33 39 40 34)
                                                           (25 9 1) simpleGrading (2.5 1 1)
78
                                                           (25 7 1) simpleGrading (2.5 1 1)
 79
             hex (12 18 19 13 34 40 41 35)
             hex (13 19 20 14 35 41 42 36) (25 10 1) simpleGrading (2.5 1 1)
 80
             hex (14 20 21 15 36 42 43 37) (25 13 1) simpleGrading (2.5 0.25 1)
81
       );
 82
 83
       edges
 85
       );
 86
 87
       patches
88
             patch inlet
 90
91
                   (0 22 23
                                1)
92
                   (1 23 24
(2 24 25
                                2)
3)
93
94
95
             patch outlet
96
 97
                   (16 17 39 38)
(17 18 40 39)
 98
                         18 40
                   (18 19 41
(19 20 42
                                  40)
100
                                  41)
                   (20 21 43 42)
103
             wall upperWall
             (
105
                   (3 25 31 9)
106
```

```
(9 31 37 15)
                    (15 37 43 21)
108
109
              wall lowerWall
110
111
                        6 28 22)
5 27 28)
112
113
                    (5 4 26 27)
(4 10 32 26)
114
115
                    (10 16 38 32)
116
117
              empty frontAndBack
118
119
                                   23)
24)
25)
27)
28)
29)
                              29
30
31
33
                          28
39
30
32
33
34
35
36
38
39
120
121
122
                    (26
(27
123
124
125
                               36
                                    30)
                               37
127
                                   33)
34)
                              39
40
128
                          40
41
                              41
130
                    (35
(36
(0
                               42
                                    36)
                          42
1 7
                               43
                         7
8 7,
9 8)
5 11 10)
12 11)
12;
                               6)
                        1235678
136
137
                                12)
13)
                           14
139
                              5 14)
17 1
                        9
                           15
140
                    (10 11
(11 12
(12 13
(13 14
                              17 16)
18 17)
19 18)
20 19)
141
142
143
                              20
21
144
145
                          15
             )
146
       );
147
148
       mergePatchPairs
149
150
151
152
```

A major feature of this problem is the use of the full mesh grading capability of blockMesh that is described in section 5.3.1 of the User Guide. The user can see that blocks 4,5 and 6 use the full list of 12 expansion ratios. The expansion ratios correspond to each edge of the block, the first 4 to the edges aligned in the local x_1 direction, the second 4 to the edges in the local x_2 direction and the last 4 to the edges in the local x_3 direction. In blocks 4, 5, and 6, the ratios are equal for all edges in the local x_1 and x_3 directions but not for the edges in the x_2 direction that corresponds in all blocks to the global y. If we consider the ratios used in relation to the block definition in section 5.3.1 of the User Guide, we realize that different gradings have been prescribed along the left and right edges in blocks 4,5 and 6 in Figure 3.5. The purpose of this differential grading is to generate a fine mesh close to the most critical region of flow, the corner of the step, and allow it to expand into the rest of the domain.

The mesh can be generated using blockMesh from the command line or from within FoamX and viewed as described in previous examples.

3.2.3 Boundary conditions and initial fields

The case files can be viewed, or edited from within FoamX or by hand. In this case, we are required to set the initial and boundary fields for velocity \mathbf{U} , pressure p, turbulent kinetic energy k and dissipation rate ε . The boundary conditions can be specified by setting the physical patch types in FoamX: the upper and lower walls are set to Wall, the left patch to Inlet and the right patch to Outlet. These physical boundary conditions

require us to specify a fixedValue at the inlet on U, k and ε . U is given in the problem specification, but the values of k and ϵ must be chosen by the user in a similar manner to that described in section 2.1.8.1 of the User Guide. We assume that the inlet turbulence is isotropic and estimate the fluctuations to be 5% of U at the inlet. We have

$$U'_x = U'_y = U'_z = \frac{5}{100} 10 = 0.5 \text{ m/s}$$
 (3.6)

and

$$k = \frac{3}{2}(0.5)^2 = 0.375 \text{ m}^2/\text{s}^2$$
 (3.7)

If we estimate the turbulent length scale l to be 10% of the width of the inlet then

$$\varepsilon = \frac{C_{\mu}^{0.75} k^{1.5}}{l} = \frac{0.09^{0.75} 0.375^{1.5}}{0.1 \times 25.4 \times 10^{-3}} = 14.855 \,\mathrm{m}^2/\mathrm{s}^3$$
(3.8)

At the outlet we need only specify the pressure p = 0Pa.

3.2.4 Case control

The choices of *fvSchemes* are as follows: the timeScheme should be SteadyState; the gradScheme and laplacianScheme should be set as default to Gauss; and, the divScheme should be set to UD to ensure boundedness.

Special attention should be paid to the settings of fvTolerances. Although the top level simpleFoam code contains only equations for p and \mathbf{U} , the turbulent model solves equations for k, ε and \mathbf{R} , and tolerance settings are required for all 5 equations. A solverTolerance of 10^{-5} and solverRelativeTolerance of 0.1 are acceptable for all variables with the exception of p when 10^{-6} and 0.01 are recommended. Under-relaxation of the solution is required since the problem is steady. A relaxationFactor of 0.7 is acceptable for \mathbf{U} , k, ε and \mathbf{R} but 0.3 is required for p to avoid numerical instability.

Finally, in *controlDict*, the time step deltaT should be set to 1 since in steady state cases such as this is effectively an iteration counter. With benefit of hindsight we know that the solution requires 1000 iterations reach reasonable convergence, hence endTime is set to 1000. Ensure that the writeFrequency is sufficiently high, e.g. 50, that you will not fill the hard disk with data during run time.

3.2.5 Running the case and post-processing

Run the case and post-process the results. After a few iterations, e.g. 50, a vortex develops beneath the corner of the step that is the height of the step but narrow in the x-direction as shown by the vector plot of velocities is shown Figure 3.6(a). Over several iterations the vortex stretches in the x-direction from the step to the outlet until at 1000 iterations the system reaches a steady-state in which the vortex is fully developed as shown in Figure 3.6(b-c).

3.3 Supersonic flow over a forward-facing step

In this example we shall investigate supersonic flow over a forward-facing step. The problem description involves a flow of Mach 3 at an inlet to a rectangular geometry with a step near the inlet region that generates shock waves.

This example introduces the following OpenFOAM features for the first time:

• supersonic flow;

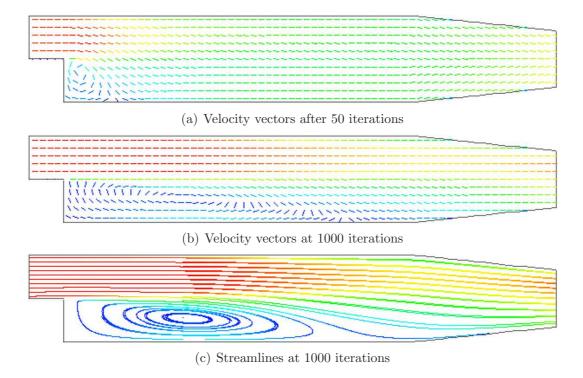


Figure 3.6: Development of a vortex in the backward-facing step.

3.3.1 Problem specification

The problem is defined as follows:

Solution domain The domain is 2 dimensional and consists of a short inlet section followed by a forward-facing step of 20% the height of the section as shown in Figure 3.7

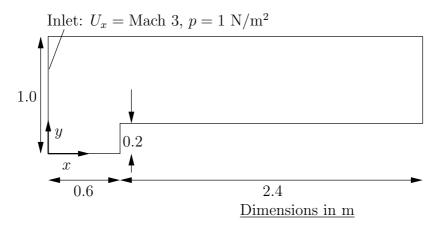


Figure 3.7: Geometry of the forward step geometry

Governing equations

• Mass continuity

$$\frac{\partial \rho}{\partial t} + \nabla \cdot (\rho \mathbf{U}) = 0 \tag{3.9}$$

• Ideal gas

$$p = \rho RT \tag{3.10}$$

• Momentum equation for Newtonian fluid

$$\frac{\partial \rho \mathbf{U}}{\partial t} + \nabla \cdot (\rho \mathbf{U} \mathbf{U}) - \nabla \cdot \mu \nabla \mathbf{U} = -\nabla p \tag{3.11}$$

• Energy equation for fluid (ignoring some viscous terms), $e = C_v T$, with Fourier's Law $\mathbf{q} = -k \nabla T$

$$\frac{\partial \rho e}{\partial t} + \nabla \cdot (\rho \mathbf{U} e) - \nabla \cdot \left(\frac{k}{C_v}\right) \nabla e = p \nabla \cdot \mathbf{U}$$
(3.12)

Initial conditions U = 0 m/s, p = 1 Pa, T = 1 K

Boundary conditions

- Inlet (left) with fixedValue for velocity U = 3 m/s = Mach 3, pressure p = 1 Pa and temperature T = 1 K;
- Outlet (right) with zeroGradient on U, p and T;
- No-slip adiabatic wall (bottom);
- Symmetry plane (top).

Transport properties

• Dynamic viscosity of air $\mu = 18.1 \mu Pa s$

Thermodynamic properties

- Specific heat at constant volume $C_v = 1.78571 \text{ J/kg K}$
- Gas constant R = 0.714286 J/kg K
- Conductivity $k = 32.3 \, \mu \text{W/m K}$

Case name forwardStep case located in the \$FOAM_TUTORIALS/sonicFoam directory.

Solver name sonicFoam: an implementation for compressible trans-sonic/supersonic laminar gas flow.

The case is designed such that the speed of sound of the gas $c = \sqrt{\gamma RT} = 1$ m/s, the consequence being that the velocities are directly equivalent to the Mach number, e.g. the inlet velocity of 3 m/s is equivalent to Mach 3. This speed of sound calculation can be verified using the relationship for a perfect gas, $C_p - Cv = R$, i.e. the ratio of specific heats

$$\gamma = C_p/C_v = \frac{R}{C_v} + 1 \tag{3.13}$$

3.3.2 Mesh generation

The mesh used in this case is relatively simple, specified with uniform rectangular cells of length 0.06 m in the x direction and 0.05 m in the y direction. The geometry can simply be divided into 3 blocks, one below the top of the step, and two above the step, one either side of the step front. The full set of vertices and blocks are given in the mesh description file below:

```
2
                       F ield
                                               OpenFOAM: The Open Source CFD Toolbox
 3
                                               Version: 1.5
                       O peration
 4
                       A nd
                                                             http://www.OpenFOAM.org
                                               Web:
                       {\tt M} \ {\tt anipulation}
 6
     FoamFile
9
           version
                            2.0;
10
11
           format
                            ascii;
                            dictionary
12
           object
                            blockMeshDict;
13
14
15
16
      convertToMeters 1;
17
18
     yertices
19
           (0 0 -0.05)

(0.6 0 -0.05)

(0 0.2 -0.05)

(0 6 0.2 -0.05)

(0 6 0.2 -0.05)

(0 1 -0.05)

(0 1 -0.05)

(0 6 1 -0.05)

(0 0 0.05)

(0 0 0.05)

(0 0.2 0.05)

(0 0.2 0.05)

(0 1 0.05)

(0 1 0.05)

(0 1 0.05)

(0 1 0.05)

(0 1 0.05)

(0 1 0.05)
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
     );
37
38
39
     blocks
40
           hex (0 1 3 2 8 9 11 10) (25 10 1) simpleGrading (1 1 1)
41
           hex (2 3 6 5 10 11 14 13) (25 40 1) simpleGrading (1 1 1)
42
           hex (3 4 7 6 11 12 15 14) (100 40 1) simpleGrading (1 1 1)
43
      );
44
45
      edges
47
      );
48
49
     patches
50
           patch inlet
52
53
                 (0 8 10 2)
(2 10 13 5)
54
55
56
           patch outlet
57
58
59
                 (471512)
60
           symmetryPlane bottom
61
62
                 (0\ 1\ 9\ 8)
63
64
           symmetryPlane top
65
66
                 (5 13 14 6)
(6 14 15 7)
67
68
69
           patch obstacle
70
71
                 (1 3 11 9)
(3 4 12 11)
72
73
74
     );
75
     mergePatchPairs
77
78
79
80
```

3.3.3 Running the case

The case approaches a steady-state at some time after 5 s. The results for pressure at 10 s are shown in Figure 3.8. The results clearly show discontinuities in pressure, *i.e.* shock waves, emanating from ahead of the base of the step.

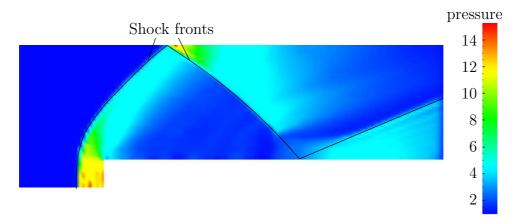


Figure 3.8: Shock fronts in the forward step problem

3.3.4 Exercise

The user can examine the effect on the solution of increasing the inlet velocity.

3.4 Decompression of a tank internally pressurised with water

In this example we shall investigate a problem of rapid opening of a pipe valve close to a pressurised liquid-filled tank. The prominent feature of the result in such cases is the propagation of pressure waves which must therefore be modelled as a compressible liquid.

This tutorial introduces the following OpenFOAM features for the first time:

- Mesh refinement
- Pressure waves in liquids

3.4.1 Problem specification

Solution domain The domain is 2 dimensional and consists of a tank with a small outflow pipe as shown in Figure 3.9

Governing equations This problem requires a model for compressibility ψ in the fluid in order to be able to resolve waves propagating at a finite speed. A barotropic relationship is used to relate density ρ and pressure p are related to ψ .

• Mass continuity

$$\frac{\partial \rho}{\partial t} + \nabla \cdot (\rho \mathbf{U}) = 0 \tag{3.14}$$

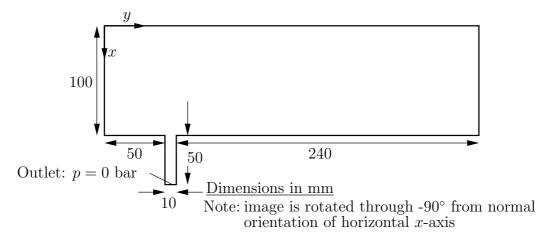


Figure 3.9: Geometry of a tank with outflow pipe

• The barotropic relationship

$$\frac{\partial \rho}{\partial p} = \frac{\rho}{K} = \psi \tag{3.15}$$

where K is the bulk modulus

• Equation 3.15 is linearised as

$$\rho \approx \rho_0 + \psi \left(p - p_0 \right) \tag{3.16}$$

where ρ_0 and p_0 are the reference density and pressure respectively such that $\rho(p_0) = \rho_0$.

• Momentum equation for Newtonian fluid

$$\frac{\partial \rho \mathbf{U}}{\partial t} + \nabla \cdot (\rho \mathbf{U} \mathbf{U}) - \nabla \cdot \mu \nabla \mathbf{U} = -\nabla p \tag{3.17}$$

Boundary conditions Using FoamX the following physical boundary conditions can be set:

- outerWall is specified the wall condition;
- axis is specified as the symmetryPlane;
- nozzle is specified as a pressureOutlet where p = 0 bar.
- front and back boundaries are specified as empty.

Initial conditions U = 0 m/s, p = 100 bar.

Transport properties

• Dynamic viscosity of water $\mu = 1.0 \text{ mPas}$

Thermodynamic properties

- Density of water $\rho = 1000 \text{ kg/m}^3$
- Reference pressure $p_0 = 1$ bar
- Compressibility of water $\psi = 4.54 \times 10^{-7} \text{ s}^2/\text{m}^2$

Solver name sonicLiquidFoam: a compressible sonic laminar liquid flow code.

Case name decompressionTank case located in the \$FOAM_TUTORIALS/sonicLiquidFoam directory.

3.4.2 Mesh Generation

The full geometry is modelled in this case; the set of vertices and blocks are given in the mesh description file below:

```
-----*- C++ -*-----
                        F ield
                                                 OpenFOAM: The Open Source CFD Toolbox
 3
                        {\tt O} peration
                                                Version: 1.5
 4
                        A nd
                                                Web:
                                                               http://www.OpenFOAM.org
 5
 6
                        M anipulation
     FoamFile
 9
                             2.0;
ascii;
           version
10
           format
11
           class
                             dictionary;
12
                            blockMeshĎict;
           object
13
14
            convertToMeters 0.1;
      vertices
19
           (0 0 -0.1)

(1 0 -0.1)

(0 0.5 -0.1)

(1 0.5 -0.1)

(1 0.5 -0.1)

(1 0.6 -0.1)

(1 0.6 -0.1)

(1 0.6 -0.1)

(1 0 0.1)

(1 0 0.1)

(1 0 0.1)

(1 0 0.5 0.1)

(1 0.5 0.1)

(1 0.6 0.1)

(1 0.6 0.1)

(1 0.6 0.1)

(1 0.6 0.1)

(1 0.6 0.1)

(1 0.6 0.1)
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
            (0 0.6 0.1)
(1 0.6 0.1)
(1.5 0.6 0.1)
36
37
38
            (0 3 0.1)
(1 3 0.1)
39
40
     );
41
42
     blocks
43
44
           hex (0 1 3 2 10 11 13 12) (30 20 1) simpleGrading (1 1 1)
45
           hex (2 3 6 5 12 13 16 15) (30 5 1) simpleGrading (1 1 1)
           hex (3 4 7 6 13 14 17 16) (25 5 1) simpleGrading (1 1 1)
47
           hex (5 6 9 8 15 16 19 18) (30 95 1) simpleGrading (1 1 1)
48
     );
49
     edges
51
52
     );
53
54
     patches
55
56
            wall outerWall
                 (0 1 11 10)
(1 3 13 11)
(3 4 14 13)
(7 6 16 17)
(6 9 19 16)
(9 8 18 19)
62
           symmetryPlane axis
66
67
                 (0 10 12 2)
(2 12 15 5)
68
69
                 (5 15 18 8)
70
71
           patch nozzle
72
73
                 (471714)
           empty back
77
            (
```

```
(0 2 3 1)
(2 5 6 3)
(3 6 7 4)
(5 8 9 6)
79
80
81
82
           empty front
83
84
                (10 11 13 12)
(12 13 16 15)
(13 14 17 16)
(15 16 19 18)
85
86
87
88
89
90
     );
91
     mergePatchPairs
92
93
94
95
     // **********************************//
```

In order to improve the numerical accuracy, we shall use the reference level of 1 bar for the pressure field. Note that both the internal field level and the boundary conditions are offset by the reference level.

3.4.3 Preparing the Run

Before we commence the setup of the calculation, we need to consider the characteristic velocity of the phenomenon we are trying to capture. In the case under consideration, the fluid velocity will be very small, but the pressure wave will propagate with the speed of sound in water. The speed of sound is calculated as:

$$c = \sqrt{\frac{1}{\psi}} = \sqrt{\frac{1}{4.54 \times 10^{-7}}} = 1483.2 \text{m/s}.$$
 (3.18)

For the mesh described above, the characteristic mesh size is approximately 2 mm (note the scaling factor of 0.1 in the blockMeshDict file). Using

$$Co = \frac{U\,\Delta t}{\Delta x}\tag{3.19}$$

a reasonable time step is around $\Delta t = 5 \times 10^{-7}$ s, giving the Co number of 0.35, based on the speed of sound. Also, note that the reported Co number by the code (associated with the convective velocity) will be two orders of magnitude smaller. As we are interested in the pressure wave propagation, we shall set the simulation time to 0.25 ms. For reference, the *controlDict* file is quoted below.

```
----*- C++ -*-----
2
                                     OpenFOAM: The Open Source CFD Toolbox
                  F ield
3
                                     Version: 1.5
                  O peration
                                               http://www.OpenFOAM.org
                  A nd
                  M anipulation
6
    FoamFile
                     2.0;
        version
10
11
         format
12
                     dictionary;
                     controlDict;
13
14
15
16
    application sonicLiquidFoam;
17
18
    startFrom
                     startTime:
19
20
    startTime
                     0;
21
22
    stopAt
                     endTime;
```

```
0.0001;
    endTime
25
26
    deltaT
                       5e-07;
27
28
    writeControl
                       timeStep;
29
30
    writeInterval
                       20;
31
32
    purgeWrite
                       0;
33
34
    writeFormat
                       ascii;
35
36
    writePrecision
                       6;
37
38
    writeCompression compressed;
39
40
    timeFormat
                       general;
41
42
    timePrecision
43
44
    runTimeModifiable yes;
45
46
```

3.4.4 Running the case

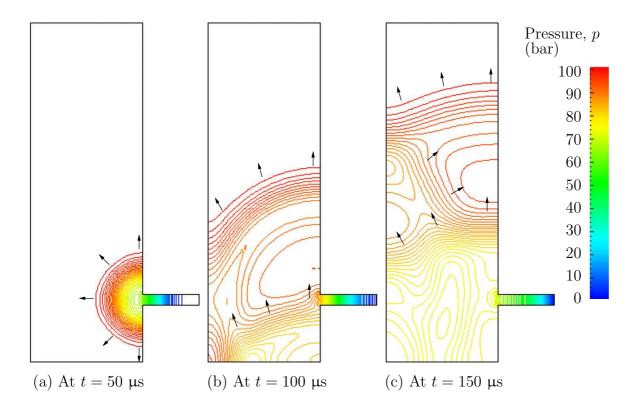


Figure 3.10: Propagation of pressure waves

The user can run the case and view results in dxFoam. The liquid flows out through the nozzle causing a wave to move along the nozzle. As it reaches the inlet to the tank, some of the wave is transmitted into the tank and some of it is reflected. While a wave is reflected up and down the inlet pipe, the waves transmitted into the tank expand and propagate through the tank. In Figure 3.10, the pressures are shown as contours so that the wave fronts are more clearly defined than if plotted as a normal isoline plot.

If the simulation is run for a long enough time for the reflected wave to return to the pipe, we can see that negative absolute pressure is detected. The modelling permits this and has some physical basis since liquids can support tension, *i.e.* negative pressures. In reality, however, impurities or dissolved gases in liquids act as sites for cavitation,

or vapourisation/boiling, of the liquid due to the low pressure. Therefore in practical situations, we generally do not observe pressures falling below the vapourisation pressure of the liquid; not at least for longer than it takes for the cavitation process to occur.

3.4.5 Improving the solution by refining the mesh

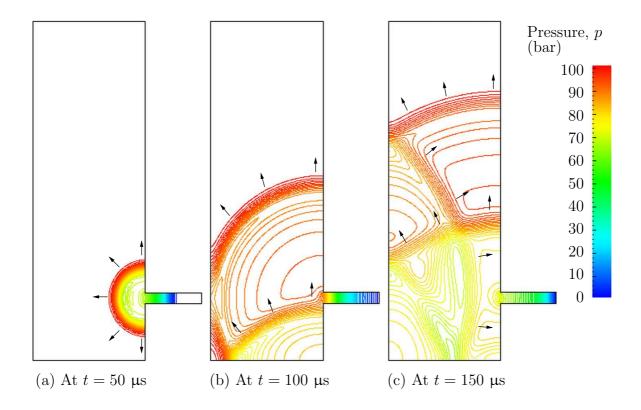


Figure 3.11: Propagation of pressure waves with refined mesh

Looking at the evolution of the resulting pressure field in time, we can clearly see the propagation of the pressure wave into the tank and numerous reflections from the inside walls. It is also obvious that the pressure wave is smeared over a number of cells. We shall now refine the mesh and reduce the time step to obtain a sharper front resolution. Simply edit the *blockMeshDict* and increase the number of cells by a factor of 4 in the x and y directions, *i.e.* block 0 becomes (120 80 1) from (30 20 1) and so on. Run blockMesh on this file. In addition, in order to maintain a Courant number below 1, the time step must be reduced accordingly to $\Delta t = 10^{-7}$ s. The second simulation gives considerably better resolution of the pressure waves as shown in Figure 3.11.

3.5 Magnetohydrodynamic flow of a liquid

In this example we shall investigate an flow of an electrically-conducting liquid through a magnetic field. The problem is one belonging to the branch of fluid dynamics known as magnetohydrodynamics (MHD) that uses mhdFoam.

3.5.1 Problem specification

The problem is known as the Hartmann problem, chosen as it contains an analytical solution with which mhdFoam can be validated. It is defined as follows:

Solution domain The domain is 2 dimensional and consists of flow along two parallel plates as shown in Fig. 3.12.

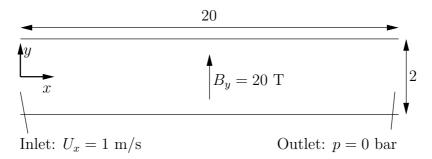


Figure 3.12: Geometry of the Hartmann problem

Governing equations

• Mass continuity for incompressible fluid

$$\nabla \cdot \mathbf{U} = 0 \tag{3.20}$$

• Momentum equation for incompressible fluid

$$\frac{\partial \mathbf{U}}{\partial t} + \nabla \cdot (\mathbf{U}\mathbf{U}) + \nabla \cdot (2\mathbf{B}\Gamma_{\mathbf{B}\mathbf{U}}\mathbf{B}) + \nabla \cdot (\nu \mathbf{U}) + \nabla (\Gamma_{\mathbf{B}\mathbf{U}}\mathbf{B} \cdot \mathbf{B}) = -\nabla p \ (3.21)$$

where **B** is the magnetic flux density, $\Gamma_{\mathbf{B}\mathbf{U}} = (2\mu\rho)^{-1}$.

• Maxwell's equations

$$\nabla \times \mathbf{E} = -\frac{\partial \mathbf{B}}{\partial t} \tag{3.22}$$

where \mathbf{E} is the electric field strength.

$$\nabla \cdot \mathbf{B} = 0 \tag{3.23}$$

$$\nabla \times \mathbf{H} = \mathbf{J} + \frac{\partial \mathbf{D}}{\partial t} = \mathbf{J} \tag{3.24}$$

assuming $\partial \mathbf{D}/\partial t \ll \mathbf{J}$. Here, **H** is the magnetic field strength, **J** is the current density and **D** is the electric flux density.

• Charge continuity

$$\nabla \cdot \mathbf{J} = 0 \tag{3.25}$$

• Constitutive law

$$\mathbf{B} = \mu \mathbf{H} \tag{3.26}$$

• Ohm's law

$$\mathbf{J} = \sigma \left(\mathbf{E} + \mathbf{U} \times \mathbf{B} \right) \tag{3.27}$$

• Combining Equation 3.22, Equation 3.24, Equation 3.27, and taking the curl

$$\frac{\partial \mathbf{B}}{\partial t} + \nabla \cdot (\mathbf{U}\mathbf{B}) - \nabla \cdot (\phi_{\mathbf{B}}\mathbf{U}) - \nabla \cdot (\Gamma_{\mathbf{B}}\mathbf{B}) = 0$$
(3.28)

Boundary conditions

- inlet is specified the inlet condition with fixed velocity U = (1, 0, 0) m/s;
- outlet is specified as the outlet with with fixed pressure p = 0 Pa;
- upperWall is specified as a wall where $\mathbf{B} = (0, 20, 0) \mathrm{T}$.
- lowerWall is specified as a wall where $\mathbf{B} = (0, 20, 0) \mathrm{T}$.
- front and back boundaries are specified as empty.

Initial conditions U = 0 m/s, p = 100 Pa, B = (0, 20, 0) T.

Transport properties

- Kinematic viscosity $\nu = 1 \text{ Pas}$
- Density $\rho = 1 \text{ kg m/s}$
- Electrical conductivity $\sigma = 1 \ (\Omega \, \text{m})^{-1}$
- Permeability $\mu = 1 \text{ H/m}$

Solver name mhdFoam: an incompressible laminar magneto-hydrodynamics code.

Case name hartmann case located in the \$FOAM_TUTORIALS/mhdFoam directory.

3.5.2 Mesh generation

The geometry is simply modelled with 100 cells in the x-direction and 40 cells in the y-direction; the set of vertices and blocks are given in the mesh description file below:

```
----*- C++ -*----
                                         OpenFOAM: The Open Source CFD Toolbox
                    F ield
3
                    O peration
                                        Version: 1.5
4
                    A nd
                                         Web:
                                                     http://www.OpenFOAM.org
5
                    M anipulation
    FoamFile
9
         version
10
                        2.0:
                        ascii;
dictionary;
blockMeshDict;
11
          format
          class
12
          object
13
14
15
     convertToMeters 1;
17
18
     vertices
20
22
          (20 \ 1 \ 0)
23
24
          (0\ 1\ 0)
26
          (20\ 1\ 0.1)
27
             1 0.1)
28
    );
29
30
     blocks
31
32
         hex (0 1 2 3 4 5 6 7) (100 40 1) simpleGrading (1 1 1)
34
35
     edges
36
37
    patches
41
```

```
42
       patch inlet
43
           (0 4 7 3)
44
45
       patch outlet
46
47
           (2651)
       patch lowerWall
51
           (1540)
52
53
       patch upperWall
54
           (3762)
       empty frontAndBack
59
           (0 \ 3 \ 2 \ 1)
(4 \ 5 \ 6 \ 7)
60
61
62
   );
63
64
   mergePatchPairs
65
66
67
```

3.5.3 Running the case

The user can run the case and view results in dxFoam. It is also useful at this stage to run the Ucomponents utility to convert the U vector field into individual scalar components. MHD flow is governed by, amongst other things, the Hartmann number which is a measure of the ratio of electromagnetic body force to viscous force

$$M = BL\sqrt{\frac{\sigma}{\rho\nu}} \tag{3.29}$$

where L is the characteristic length scale. In this case with $B_y=20$ T, M=20 and the electromagnetic body forces dominate the viscous forces. Consequently with the flow fairly steady at t=2 s the velocity profile is almost planar, viewed at a cross section midway along the domain x=10 m. The user can plot a graph of the profile of U_x in dxFoam. Now the user should reduce the magnetic flux density **B** to 1 Tand re-run the code and Ucomponents. In this case, M=1 and the electromagnetic body forces no longer dominate. The velocity profile consequently takes on the parabolic form, characteristic of Poiseuille flow as shown in Figure 3.13. To validate the code the analytical solution for the velocity profile U_x is superimposed in Figure 3.13, given by:

$$\frac{U_x(y)}{U_x(0)} = \frac{\cosh M - \cosh M(y/L)}{\cosh M - 1} \tag{3.30}$$

where the characteristic length L is half the width of the domain, i.e. 1 m.

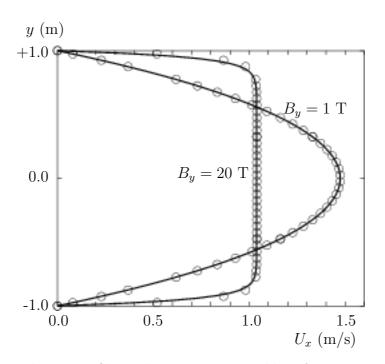


Figure 3.13: Velocity profile in the Hartmann problem for $B_y=1~\mathrm{T}$ and $B_y=20~\mathrm{T}$.

Index

Symbols Numbers A B C D E F G H I J K L M N O P Q R S T U V W X Z

Symbols	algorithms tools, $ ext{U-91}$
*	allTime
tensor member function, P-25	menu entry, U-184
+	analytical solution, P-45
tensor member function, P-25	anisotropicFilter model, U-94
-	Annotation window panel, U-25, U-159
tensor member function, P-25	ansysToFoam utility, U-86
/	APIfunctions model, U-93
tensor member function, P-25	applications, U-67
/**/	Apply button, U-156, U-160
C++ syntax, U-76	arbitrarily unstructured, P-31
//	arc
C++ syntax, U-76	keyword entry, U-132
OpenFOAM file syntax, U-98	arc keyword, U-131
# include	ascii
C++ syntax, U-70, U-76	keyword entry, U-105
&	attachMesh utility, U-87
tensor member function, P-25	Auto Accept button, U-159
&&	autoPatch utility, U-87
tensor member function, P-25	axes
^	right-handed, U-130
tensor member function, P-25	right-handed rectangular Cartesian, P-15.
<pre><lesmodel>Coeffs keyword, U-174</lesmodel></pre>	U-20
<pre><rasmodel>Coeffs keyword, U-174</rasmodel></pre>	axi-symmetric cases, U-127, U-135
<delta>Coeffs keyword, U-174</delta>	axi-symmetric mesh, U-122
0.000000e + 00 directory, U-98	,
1-dimensional mesh, U-122	В
1D mesh, U-122	background
2-dimensional mesh, U-122	process, U-26, U-79
2D mesh, U-122	backward
Numbers	keyword entry, U-112
0 directory, U-98	Backward differencing, P-39
Unrectory, 0-98	basicThermophysicalModels
\mathbf{A}	library, U-92
access functions, P-23	binary
addLayersControls keyword, U-138	keyword entry, U-105
adiabaticFlameT utility, U-90	BirdCarreau model, U-95
adjustableRunTime	blended differencing, P-38
keyword entry, U-59, U-105	block
adjustPhi tools, U-91	expansion ratio, U-132
adjustTimeStep keyword, U-59	block keyword, U-131
agglomerator keyword II-115	blockMesh solver P-47

P-74 Index

blockMesh utility, U-38, U-86, U-127	boundary type
blockMesh executable	empty, U-187
vertex numbering, U-132	boundaryField keyword, U-22, U-102
blockMeshDict	boundaryFoam solver, U-83
dictionary, U-20, U-22, U-36, U-48, U-127,	
U-136	keyword entry, U-110, U-111
blocks keyword, U-22, U-32, U-132	boxToCell keyword, U-58
bound tools, U-91	boxTurb utility, U-86
boundaries, U-124	breaking of a dam, U-55
boundary, U-124	bubbleFoam solver, U-84
boundary	buoyantFoam solver, U-85
dictionary, U-121, U-127	buoyantSimpleRadiationFoam solver, U-85
boundary condition	buoyantSimpleFoam solver, U-85
calculated, U-128	button
cyclic, U-127	Apply, U-156, U-160
directionMixed, U-128	Auto Accept, U-159
empty, $P-63$, $P-69$, $U-20$, $U-122$, $U-127$	Choose Preset, U-158
fixedGradient, U-128	Compact, U-187
fixedValue, U-128	Delete, U-156
fluxCorrectedVelocity, U-129	Edit Color Map, U-157
gammaContactAngle, $U-57$	Info, U-187
inlet, P-69	My Jobs, U-187
inletOutlet, U-129	Orientation Axes, U-25, U-159
mixed, U-128	Rescale to Data Range, U-28
movingWallVelocity, U-129	Reset, U-156
outlet, P-69	Set Solid Color, U-158
outletInlet, U-129	Update GUI, U-28, U-157
partialSlip, U-129	Use Parallel Projection, U-25
patch, U-126	Use parallel projection, U-159
pressureDirectedInletVelocity, U-129	cont, U-187
pressureInletVelocity, U-129	endNow, U-187
pressureOutlet, P-63	end, U-187
pressure Transmissive, U-129	kill, U-187
processor, U-127	purge, U-187
setup, U-22	. 9 /
slip, U-129	read, U-187
supersonicFreeStream, U-129	status, U-187
surfaceNormalFixedValue, U-129	suspend, U-187
symmetryPlane, P-63, U-126	\mathbf{C}
totalPressure, U-129	C++ syntax
turbulentInlet, U-129	/**/, U-76
wall, U-40	//, U-76
wall, P-63, P-69, U-57, U-126	# include, U-70, U-76
	cacheAgglomeration keyword, U-115
wallBuoyantPressure, U-129	calculated
wedge, U-122, U-127, U-135	
zeroGradient, U-128	boundary condition, U-128
boundary conditions, P-43	case
Dirichlet, P-43	browser, U-180
inlet, P-44	server, U-186
Neumann, P-43	case manager
no-slip impermeable wall, P-44	FoamX (obsolete), U-177
outlet, P-44	Case Name text box, U-182
physical, P-44	Case Root text box, U-182
symmetry plane, P-44	cases, U-97

castellatedMesh keyword, U-138	polyMesh, $P-31$, $U-119$, $U-121$
castellatedMeshControls	polyPatchList, P-31
dictionary, U-139, U-141	polyPatch, P-31
${\tt castellatedMeshControls}\ keyword,\ U\text{-}138$	scalarField, P-29
cavity flow, U-19	scalar, P-23
ccm26ToFoam utility, U-86	slice, P-31
CEI_ARCH	symmTensorField, P-29
environment variable, U-164	symmTensorThirdField, P-29
CEI_HOME	tensorField, P-29
environment variable, U-164	tensorThirdField, P-29
cell	tensor, P-23
expansion ratio, U-132	vectorField, P-29
cell class, P-31	vector, P-23, U-101
cell	word, P-25, P-31
keyword entry, U-166	class keyword, U-99
cellDecompFiniteElement	clockTime
library, U-91	keyword entry, U-105
cellPoint	cloud keyword, U-167
keyword entry, U-166	cmptAv
cellPointFace	tensor member function, P-25
keyword entry, U-166	Co utility, U-88
cells	cofactors
dictionary, U-127	tensor member function, P-25
cellSet utility, U-87	coldEngineFoam solver, U-85
central differencing, P-38	Color By menu, U-158
cfdTools	Color Legend window, U-30
library, U-91	Color Legend window panel, U-158
cfxToFoam utility, U-86, U-145	Color Scale window panel, U-158
cGamma keyword, U-61	combustionThermophysicalModels
channelOodles solver, U-83	library, U-92
Chart Options window, U-35	comments, U-76
checkMesh utility, U-87, U-146	Compact button, U-187
checkYPlus utility, U-89	compressed
chemistryModel	keyword entry, U-105
library, U-93	compressible tools, U-91
chemistryModel model, U-93	compressibleLesInterFoam solver, U-84
chemistrySolver model, U-93	compressibleLESModels
chemkinMixture model, U-93, U-172	library, U-95
chemkinToFoam utility, U-90	compressibleRASModels
Choose Preset button, U-158	library, U-94
chtMultiRegionFoam solver, U-85	constant directory, U-98, U-171
Class menu, U-182	constLaminarFlameSpeed $model, U-93$
class	constTransport model, U-93, U-172
cell, P-31	cont button, U-187
dimensionSet, P-25, P-32, P-33	containers tools, U-91
face, P-31	continuum
finiteVolumeCalculus, P-33	mechanics, P-15
finiteVolumeMethod, P-33	control
fvMesh, P-31	of time, U-104
fvSchemes, P-36	controlDict
fvc, P-36	dictionary, P-65, U-23, U-32, U-41, U-50
fvm, P-36	U-59, U-98, U-151
pointField, P-31	controlDict file, P-49
polyBoundaryMesh, P-31	convection, see divergence, P-38

P-76 Index

convergence, U-39	decomposition
convertToMeters keyword, U-131	of field, U-79
coodles solver, U-84	of mesh, U-79
coordinate	decompression of a tank, P-62
system, P-15	defaultFieldValues keyword, U-58
coordinate system, U-20	deformedGeom utility, U-87
CORBA, U-92, U-177	Delete button, U-156
corrected	delta keyword, U-81, U-174
keyword entry, U-110, U-111	deltaT keyword, U-104
couplePatches utility, U-87	dependencies, U-70
Courant number, P-42, U-24	dependency lists, U-70
cpuTime	det
keyword entry, U-105	tensor member function, P-25
Crank Nicholson	determinant, see tensor, determinant
temporal discretisation, P-42	dev
CrankNicholson	tensor member function, P-25
keyword entry, U-112	diag
createPatch utility, U-87	tensor member function, P-25
cross product, see tensor, vector cross product	diagonal
CrossPowerLaw	keyword entry, U-115
keyword entry, U-58	DIC
CrossPowerLaw model, U-95	keyword entry, U-115
cubeRootVolDelta model, U-94	DICGaussSeidel
cubicCorrected	keyword entry, U-115
keyword entry, U-112	Dictionaries dictionary tree, U-188
cubicCorrection	dictionary
keyword entry, U-109	LESProperties, U-174
curl, P-37	PISO, U-25
curl	RASProperties, U-41, U-174
fvc member function, P-37	blockMeshDict, U-20, U-22, U-36, U-48,
Current Time Controls menu, U-28, U-157	U-127, U-136
curve keyword, U-167	boundary, U-121, U-127
cyclic	castellatedMeshControls, U-139, U-141
boundary condition, U-127	cells, U-127
cyclic	controlDict, P-65, U-23, U-32, U-41, U-50,
keyword entry, U-127	U-59, U-98, U-151
cylinder	decomposeParDict, U-79
flow around a, P-45	faces, U-121, U-127
now around a, 1 -10	fvSchemes, U-60, U-98, U-106, U-107
D	fvSolution, U-98, U-113
d2dt2	mechanicalProperties, U-49
fvc member function, P-37	neighbour, U-121
fvm member function, P-37	owner, U-121
dam	points, U-121, U-127
breaking of a, U-55	thermalProperties, U-50
db tools, U-91	thermophysicalProperties, U-171
ddt	transportProperties, U-23, U-39, U-41
fvc member function, P-37	dictionary tree
fvm member function, P-37	Dictionaries, U-188
DeardorffDiffStress model, U-95	Fields, U-187
debug keyword, U-138	dieselEngineFoam solver, U-85
decomposePar utility, U-79, U-80, U-90	dieselFoam solver, U-85
decomposeParDict	dieselMixture model, U-92, U-172
dictionary, U-79	dieselSpray
~ ·	· ·

library, U-92	dx
diEthylEther model, U-93	keyword entry, U-166
differencing	dynamicMesh
Backward, P-39	library, U-91
blended, P-38	dynMixedSmagorinsky model, U-94
central, P-38	dynOneEqEddy model, U-94, U-95
Euler implicit, P-39	dynSmagorinsky model, U-94
Gamma, P-38	T.
MINMOD, P-38	E
SUPERBEE, P-38	edgeGrading keyword, U-133
upwind, P-38	edgeMesh
van Leer, P-38	library, U-92
DILU	edges keyword, U-131
keyword entry, U-115	Edit menu, U-159
dimension	Edit Color Map button, U-157
checking in OpenFOAM, P-25, U-101	electrostaticFoam solver, U-85
dimensional units, U-101	empty
dimensioned <type> template class, P-25</type>	boundary condition, P-63, P-69, U-20,
dimensionedTypes tools, U-91	U-122, U-127
dimensions keyword, U-22, U-102	empty boundary type, U-187
dimensionSet class, P-25, P-32, P-33	empty
dimensionSet tools, U-91	keyword entry, U-127
diMethylEther model, U-93	end button, U-187
direct numerical simulation, U-60	endNow button, U-187
directionMixed	endTime keyword, U-24, U-104
boundary condition, U-128	engine
directory	library, U-92
0.000000e+00, U-98	engineCompRatio utility, U-90
0, U-98	engineFoam solver, U-85
Make, U-71	engineSwirl utility, U-86
constant, U-98, U-171	ensight74FoamExec utility, U-164
fluentInterface, U-162	ensight76FoamExec utility, U-88
polyMesh, U-98, U-121	ENSIGHT7_INPUT
processorN, U-80	environment variable, U-164
run, U-97	ENSIGHT7_READER
system, P-49, U-98	environment variable, U-164
tutorials, P-45, U-19	enstrophy utility, U-88
discretisation	environment variable
equation, P-33	CELARCH, U-164 CELHOME, U-164
Display window panel, U-25, U-28,	ENSIGHT7_INPUT, U-164
U-156, U-157	ENSIGHT7_INFOT, 0-104 ENSIGHT7_READER, U-164
distance	FOAMX_PATH, U-192
keyword entry, U-141, U-167	FOAMX_SYSTEM_CONFIG, U-192
distributed keyword, U-81, U-82	FOAMX_USER_CONFIG, U-192
div	FOAM_RUN, U-97, U-192
fvc member function, P-37	JAVA_HOME, U-192
fvm member function, P-37	WM_ARCH, U-74
divergence, P-37, P-39	WM_COMPILER_BIN, U-74
divSchemes keyword, U-107	WM_COMPILER_DIR, U-74 WM_COMPILER_DIR, U-74
divU utility, U-88	WM_COMPILER_LIB, U-74
dos Foam solver, U-85	WM_COMPILER, U-74
doLayers keyword, U-138 double inner product, see tensor,double inner	WM_COMPILE, 0-74 WM_COMPILE_OPTION, U-74
product product, see tensor, double inner	WM_DIR, U-74
product	VVIVI_DIIN, U-14

P-78 Index

WM_JAVAC_OPTION, U-74	FieldField <type> template class, P-32</type>
WM_LINK_LANGUAGE, U-74	Fields dictionary tree, U-187
WM_MPLIB, U-74	fields, P-29
WM_OPTIONS, U-74	mapping, U-151
WM_PROJECT_DIR, U-74	fields tools, U-91
WM_PROJECT_INST_DIR, U-74	fields keyword, U-166
WM_PROJECT_LANGUAGE, U-74	Field <type> template class, P-29</type>
WM_PROJECT_USER_DIR, U-74	fieldValues keyword, U-58
WM_PROJECT_VERSION, U-74	file
WM_PROJECT, U-74	FoamX.cfg, U-191
WM_SHELL, U-74	FoamXClient.cfg, U-178, U-191
wmake, U-73	Make/files, U-72
environmentalProperties file, U-58	controlDict, P-49
	environmentalProperties, U-58
equilibriumCO utility, U-90	files, U-71
equilibriumFlameT utility, U-90	
errorEstimation	options, U-71
library, U-92	snappyHexMeshDict, U-137
errorReduction keyword, U-145	transportProperties, U-58
estimateScalarError utility, U-90	file format, U-98
Euler	files file, U-71
keyword entry, U-112	finalLayerRatio keyword, U-144
Euler implicit	financialFoam solver, U-86
differencing, P-39	finite volume
temporal discretisation, P-42	discretisation, P-27
examples	mesh, P-31
decompression of a tank, P-62	finiteVolume tools, U-91
flow around a cylinder, P-45	finiteVolumeCalculus class, P-33
flow over backward step, P-53	finiteVolumeMethod class, P-33
Hartmann problem, P-67	firstTime
supersonic flow over forward step, P-58	menu entry, U-184
expansionRatio keyword, U-144	firstTime keyword, U-104
explicit	fixed
temporal discretisation, P-42	keyword entry, U-105
exponential model, U-93	fixedGradient
extrudeMesh utility, U-86	boundary condition, U-128
, , , , , , , , , , , , , , , , , , ,	fixedValue
${f F}$	boundary condition, U-128
face class, P-31	flattenMesh utility, U-87
face keyword, U-167	flow
faceAreaPair	free surface, U-55
keyword entry, U-115	laminar, U-19
faceDecompFiniteElement	steady, turbulent, P-53
library, U-92	supersonic, P-58
faces	turbulent, U-19
dictionary, U-121, U-127	flow around a cylinder, P-45
faceSet utility, U-87	flow over backward step, P-53
FDIC	flowType utility, U-88
keyword entry, U-115	fluentInterface directory, U-162
featureAngle keyword, U-144	fluentMeshToFoam utility, U-87, U-144
features keyword, U-139	fluxCorrectedVelocity
field	boundary condition, U-129
U, U-24	fluxRequired keyword, U-107
p, U-24	OpenFOAM
decomposition, U-79	cases, U-97
GOODINGON VIII	

FOAM_RUN	${ t sqrGradGrad}, ext{P-37}$
environment variable, U-97, U-192	fvm class, P-36
foamCalc utility, U-33	fvm member function
foamCorrectVrt script/alias, U-150	d2dt2, P-37
foamDataToFluent utility, U-88, U-162	ddt, P-37
foamDebugSwitches utility, U-90	div, P-37
FoamFile keyword, U-99	laplacian, P-37
foamFile	Su, P-37
keyword entry, U-166	SuSp, P-37
foamInfoExec utility, U-90	fvMatrix template class, P-33
foamJob script/alias, U-169	fvMesh class, P-31
foamLog script/alias, U-169	fvSchemes
foamMeshToFluent utility, U-87, U-162	dictionary, U-60, U-98, U-106, U-107
foamToEnsight utility, U-88	fvSchemes class, P-36
foamToFieldview9 utility, U-88	fvSchemes
foamToGMV utility, U-88	menu entry, U-51
foamToVTK utility, U-88	fvSolution
foamUser	dictionary, U-98, U-113
library, U-78	
FoamX (obsolete)	\mathbf{G}
case browser, U-180	gambitToFoam utility, U-87, U-144
case manager, U-177	GAMG
case server, U-186	keyword entry, U-114, U-115
OpenFOAM case manager, U-177	Gamma
host browser, U-178	keyword entry, U-109
JAVA GUI, U-179	Gamma differencing, P-38
name server, U-178	gammaContactAngle
FoamX utility, U-86	boundary condition, U-57
FoamX.cfg file, U-191	Gauss
FOAMX_PATH	keyword entry, U-110
environment variable, U-192	Gauss's theorem, P-36
FOAMX_SYSTEM_CONFIG	GaussSeidel
environment variable, U-192	keyword entry, U-115
FOAMX_USER_CONFIG	General window panel, U-159
environment variable, U-192	general model, U-93
FoamXClient.cfg file, U-178, U-191	general
foreground	keyword entry, U-105
process, U-26	geometric-algebraic multi-grid, U-115
format keyword, U-99	GeometricBoundaryField template class, P-32
fourth	geometricField <type> template class, P-32</type>
keyword entry, U-110, U-111	geometry keyword, U-138
functions keyword, U-106	gGrad
fvc class, P-36	fvc member function, P-37
fvc member function	global tools, U-91
curl, P-37	gmshToFoam utility, U-87
d2dt2, P-37	gnemdFoam solver, U-86
ddt, P-37	gnuplot
div, P-37	keyword entry, U-105, U-166
gGrad, P-37	grad
grad, P-37	fvc member function, P-37
laplacian, P-37	(Grad Grad) squared, P-37
lsGrad, P-37	gradient, P-37, P-40
snGrad, P-37	Gauss scheme, P-40
snGradCorrection, P-37	Gauss's theorem, U-51

P-80 Index

least square fit, U-51	keyword entry, U-141
least squares method, P-40, U-51	insideCells utility, U-87
surface normal, P-40	interDyMFoam solver, U-84
gradSchemes keyword, U-107	interFoam solver, U-84
graphFormat keyword, U-105	internalField keyword, U-22, U-102, U-187
Gstream	interPhaseChangeFoam solver, U-84
library, U-92	interpolationScheme keyword, U-166
guldersLaminarFlameSpeed model, U-93	interpolations tools, U-91
	interpolationSchemes keyword, U-107
${ m H}$	inv
hConstThermo model, U-93, U-171	tensor member function, P-25
Help menu, U-159	isoOctane model, U-93
hhuMixtureThermo model, U-92, U-172	_
hierarchical	${ m J}$
keyword entry, U-80, U-81	janafThermo model, U-93, U-171
hMixtureThermo model, U-92, U-172	JAVA_HOME
homogeneousMixture model, U-92, U-172	environment variable, U-192
host	jplot
browser, U-178	keyword entry, U-105, U-166
hThermo model, U-92, U-172	I/
I	K
	kappa keyword, U-174
I	kEpsilon model, U-94
tensor member function, P-25	keyword
icoDyMFoam solver, U-83	FoamFile, U-99
icoErrorEstimate utility, U-90	LESmodel, U-174
icoFoam solver, U-19, U-23, U-24, U-26, U-83	RASModel, U-174
icoMomentError utility, U-90	addLayersControls, U-138
ideasToFoam utility, U-145	adjustTimeStep, U-59
ideasUnvToFoam utility, U-87	agglomerator, U-115
identities, see tensor, identities	arc, U-131
identity, see tensor, identity	blocks, U-22, U-32, U-132
incompressible tools, U-91	block, U-131
incompressibleLESModels	boundaryField, U-22, U-102
library, U-94	boxToCell, U-58
incompressiblePostProcessing	cGamma, U-61
library, U-91	cacheAgglomeration, U-115
incompressibleRASModels	castellatedMeshControls, U-138
library, U-94	castellatedMesh, U-138
incompressibleTransportModels	class, U-99
library, P-55, U-95	$ ext{cloud}, ext{U-}167$
incompressibleTurbulenceModels	convertToMeters, U-131
library, P-55	$\mathrm{curve},\mathrm{U} ext{-}167$
index	debug, U-138
notation, P-16, P-17	${ t defaultFieldValues,\ U-58}$
Info button, U-187	$\mathtt{deltaT}, \mathrm{U}\text{-}104$
Information window panel, U-156	delta, U-81, U-174
inhomogeneousMixture model, U-92, U-172	$\mathtt{dimensions}, U\text{-}22, U\text{-}102$
inlet	distributed, U-81, U-82
boundary condition, P-69	${\tt divSchemes}, {\hbox{U-}}107$
inletOutlet	doLayers, U-138
boundary condition, U-129	$\hbox{\tt edgeGrading, U-133}$
inner product, see tensor, inner product	edges, $U-131$
inside	$\mathtt{endTime},\ \mathrm{U\text{-}}24,\ \mathrm{U\text{-}}104$

D 1 II 14F	
errorReduction, U-145	minVolRatio, U-145
expansionRatio, U-144	minVol, U-145
face, U-167	mode, U-141
featureAngle, U-144	nBufferCellsNoExtrude, U-144
features, U-139	nCellsBetweenLevels, U-139
fieldValues, U-58	nFaces, U-122
fields, U-166	nFinestSweeps, U-115, U-116
finalLayerRatio, U-144	nGammaSubCycles, U-61
firstTime, U-104	nGrow, U-144
fluxRequired, U-107 format, U-99	nPostSweeps, U-115, U-116
functions, U-106	nPreSweeps, U-115 nRelaxIter, U-142, U-144
geometry, U-138	nSmoothNormals, U-144
gradSchemes, U-107	nSmoothPatch, U-142
graphFormat, U-105	nSmoothScale, U-145
internalField, U-22, U-102, U-187	nSmoothSurfaceNormals, U-144
interpolationSchemes, U-107	nSmoothThickness, U-144
interpolationScheme, U-166	nSolveIter, U-142
kappa, U-174	numberOfSubdomains, U-81
laplacianSchemes, U-107	n, U-81
latestTime, U-39	object, U-99
layers, U-144	order, U-81
leastSquares, U-51	pRefCell, U-25, U-117
levels, U-142	pRefValue, U-25, U-117
libs, U-106	patchMap, U-152
locationInMesh, U-139, U-141	patches, U-131, U-133
location, U-99	pdRefCell, U-117
manualCoeffs, U-81	pdRefValue, U-117
${ t maxBoundarySkewness}, { t U-145}$	preconditioner, U-114
maxConcave, U-145	pressure, U-49
$\mathtt{maxCo},\ \mathtt{U}\text{-}59$	$ ext{processorWeights}, ext{U-81}$
$ exttt{maxDeltaT}, exttt{U-}59$	purgeWrite, $ ext{U-}105$
maxFaceThicknessRatio, U-144	${\tt refGradient}, U\text{-}128$
maxGlobalCells, U -139	referenceLevel, U-187
maxInternalSkewness, U-145	refinementRegions, U-139, U-142
maxLocalCells, U-139	refinementSurfaces, U-139
maxNonOrtho, U-145	refinementRegions, U-141
maxThicknessToMedialRatio, U-144	regions, U-58
mergeLevels, U-116	relTol, U-52, U-114
mergeTolerance, U-138	resolveFeatureAngle, U-139, U-140
meshQualityControls, U-138	roots, U-81, U-82
method, U-81	runTimeModifiable, U-105
metisCoeffs, U-81	setFormat, U-166
midPointAndFace, U-167	sets, U-166
midPoint, U-167	simpleGrading, U-133
minArea, U-145	smoother, U-115
minDeterminant, U-145	snGradSchemes, U-107
minFlatness II 145	snapControls, U-138
minFlatness, U-145 minMedianAxisAngle, U-144	snap, U-138 solvers, U-113
minRefinementCells, U-139	spline, U-131
minThickness, U-144	startFace, U-122
minTriangleTwist, U-145	startFrom, U-23, U-104
minTwist, U-145	startTime, U-23, U-104
militario, 0 110	2001011110, 0 20, 0 101

P-82

17.104	II 100
stopAt, U-104	cell, U-166
surfaceFormat, U-166	clockTime, U-105
surfaces, U-166	compressed, U-105
thermoType, U-171	corrected, U-110, U-111
timeFormat, U-105	cpuTime, $U-105$
timePrecision, U-105	cubicCorrected, U-112
timeScheme, U-107	cubicCorrection, U-109
tolerance, U-52, U-114, U-142	cyclic, U-127
${\tt topoSetSource}, \text{U-}58$	${\tt diagonal}, {\hbox{U-}115}$
$ ext{traction}, ext{U-49}$	$\mathtt{distance},\ \mathrm{U\text{-}}141,\ \mathrm{U\text{-}}167$
turbulence, U-174	$\mathtt{dx}, \mathtt{U}\text{-}166$
$\mathtt{type},\ \mathrm{U}\text{-}124,\ \mathrm{U}\text{-}125$	empty, $U-127$
uniform, U - 167	$\mathtt{faceAreaPair}, \text{U-}115$
$ ext{valueFraction}, ext{U-}128$	fixed, $U\text{-}105$
value, U-23, U-128	${\tt foamFile}, U\textrm{-}166$
$\mathtt{version}, U\text{-}99$	$\mathtt{fourth},\ U\text{-}110,\ U\text{-}111$
vertices, U -22, U -131	${\tt general}, {\tt U\text{-}}105$
wallFunctionCoeffs, U-174	gnuplot, U-105, U-166
writeCompression, U - 105	hierarchical, U-80, U-81
writeControl, U-24, U-59, U-104	inside, U -141
writeFormat, U-54, U-105	jplot, U-105, U-166
writeInterval, U-24, U-33, U-105	latestTime, U-104
writePrecision, U-105	leastSquares, U-110
<pre><lesmodel>Coeffs, U-174</lesmodel></pre>	limitedCubic, U-109
<pre><rasmodel>Coeffs, U-174</rasmodel></pre>	limitedLinear, U-109
<delta>Coeffs, U-174</delta>	limited, U-110, U-111
keyword entry	linearUpwind, U-109, U-112
CrankNicholson, U-112	linear, U-109, U-112
CrossPowerLaw, $\stackrel{'}{ ext{U}} ext{-}58$	line, U-132
DICGaussSeidel, U-115	manual, U-80, U-81
DIC, U-115	metis, U-80, U-81
DILU, U-115	midPoint, U-109
Euler, U-112	nextWrite, U-104
FDIC, U-115	noWriteNow, U-104
GAMG, U-114, U-115	none, U-108, U-115
Gamma, U-109	null, U-166
GaussSeidel, U-115	outside, U-141
Gauss, U-110	patch, U-127, U-168
MGridGen, U-115	polyLine, U-132
MUSCL, U-109	polySpline, U-132
Newtonian, U-58	processor, U-127
PBiCG, U-114	raw, U-105, U-166
PCG, U-114	runTime, U-33, U-104
QUICK, U-109, U-112	scientific, U-105
SFCD, U-109, U-112	simpleSpline, U-132
UMIST, U-108	simple, U-80, U-81
•	- · · · · · · · · · · · · · · · · · · ·
adjustableRunTime, U-59, U-105 arc, U-132	skewLinear, U-109, U-112 smoothSolver, U-114
•	•
ascii, U-105	startTime, U-23, U-104
backward, U-112	steadyState, U-112
binary, U-105	stl, U-166
bounded, U-110, U-111	symmetryPlane, U-127
cellPointFace, U-166	timeStep, U-24, U-33, U-104
cellPoint, U-166	uncompressed, $U-105$

$\hbox{uncorrected, U-110, U-111}$	libraries, U-67
$\mathtt{upwind},\ U\text{-}109,\ U\text{-}112$	library
$ ext{vanLeer}, ext{U-109}$	Gstream, U - 92
vtk, U-166	LESdeltas, U-94
$\mathtt{wall}, \mathrm{U}\text{-}127$	LESfilters, U-94
wedge, $U-127$	ODE, U-92
writeControl, U-104	OpenFOAM, U-91
writeNow, U - 104	PV3FoamReader, U-155
xmgr, U-105, U-166	PVFoamReader, U-155
xyz, U-167	basicThermophysicalModels, $U-92$
x, U-167	cellDecompFiniteElement, U-91
y, U-167	cfdTools, U-91
z, U-167	chemistryModel, U-93
kill button, U-187	combustionThermophysicalModels, U-92
kivaToFoam utility, U-87	compressibleLESModels, U-95
Kronecker delta, P-20	compressibleRASModels, U-94
211011001101 40104, 1 20	dieselSpray, U-92
${f L}$	dynamicMesh, U-91
lagrangian	edgeMesh, U-92
library, U-92	engine, U-92
Lambda2 utility, U-89	errorEstimation, U-92
LamBremhorstKE model, U-94	faceDecompFiniteElement, U-92
laminar model, U-94	foamUser, U-78
laminarFlameSpeedModels	incompressibleLESModels, U-94
library, U-93	incompressiblePostProcessing, U-91
laplaceFilter model, U-94	incompressible RASModels, U-94
Laplacian, P-38	incompressibleTransportModels, P-55, U-95
laplacian, P-37	incompressible Turbulence Models, P-55
laplacian	lagrangian, U-92
fvc member function, P-37	laminarFlameSpeedModels, U-93
fvm member function, P-37	liquids, U-93
laplacianFoam solver, U-83	meshTools, U-92
laplacianSchemes keyword, U-107	mico-2.3.13, U-92
latestTime	mpich-1.2.4, U-92
keyword entry, U-104	openmpi-1.2.6, U-92
menu entry, U-184	pdf, U-93
latestTime keyword, U-39	primitive, P-23
LaunderGibsonRSTM model, U-94	randomProcesses, U-92
LaunderSharmaKE model, U-94	sampling, U-91
layers keyword, U-144	shapeMeshTools, U-92
leastSquares	specie, U-93
keyword entry, U-110	thermophysicalFunctions, U-93
leastSquares keyword, U-51	
lesBuoyantFoam solver, U-85	thermophysical, U-171
lesCavitatingFoam solver, U-84	triSurface, U-92
LESdeltas	vtkFoam, U-155
	vtkPV3Foam, U-155
library, U-94	zlib-1.2.3, U-92
LESfilters	libs keyword, U-106
library, U-94	lid-driven cavity flow, U-19
lesInterFoam solver, U-84	LienCubicKE model, U-94
LESmodel keyword, U-174	LienCubicKELowRE model, U-94
LESProperties	LienLeschzinerLowRE model, U-94
dictionary, U-174	Lights window panel, U-159
levels keyword, U-142	limited

P-84 Index

keyword entry, U-110, U-111	maxInternalSkewness keyword, U-145
limitedCubic	maxLocalCells keyword, U-139
keyword entry, U-109	maxNonOrtho keyword, U-145
limitedLinear	maxThicknessToMedialRatio keyword, U-144
keyword entry, U-109	mdEquilibrationFoam solver, U-86
line	mechanicalProperties
keyword entry, U-132	dictionary, U-49
linear	menu
keyword entry, U-109, U-112	Class, U-182
linearUpwind	Color By, U-158
keyword entry, U-109, U-112	Current Time Controls, U-28, U-157
liquid	Edit, U-159
electrically-conducting, P-67	Help, U - 159
liquids	Plot Type, U-35
library, U-93	VCR Controls, U-28, U-157
lists, P-29	View, $\mathrm{U} ext{-}159$
List <type> template class, P-29</type>	menu entry
location keyword, U-99	Plot Over Line, U-35
locationInMesh keyword, U-139, U-141	Save Animation, U-161
locDynOneEqEddy model, U-94	Save Screenshot, U-161
lowReOneEqEddy model, U-95	Settings, U-159
LRDDiffStress model, U-95	Show Color Legend, U-28
LRR model, U-94	Solid Color, U-158
lsGrad	Toolbars, U-159
fvc member function, P-37	View Settings, U-25
	View Settings, U-25, U-159
${f M}$	Wireframe, U-158
Mach utility, U-89	allTime, $U-184$
mag	${\tt firstTime}, U\text{-}184$
tensor member function, P-25	${\tt fvSchemes}, {\tt U-51}$
magGradU utility, U-89	${\tt latestTime}, {\tt U-184}$
magnetohydrodynamics, P-67	noTime, U-184
magSqr	mergeLevels keyword, U-116
tensor member function, P-25	mergeMeshes utility, U-87
magU utility, U-89	mergeTolerance keyword, U-138
Make directory, U-71	mesh
make script/alias, U-69	1-dimensional, U-122
Make/files file, U-72	1D, U-122
manual	2-dimensional, U-122
keyword entry, U-80, U-81	2D, U-122
manualCoeffs keyword, U-81	axi-symmetric, U-122
${\sf mapFields\ utility,\ U-32,\ U-38,\ U-42,\ U-54,\ U-86,}$	basic, P-31
U-151	block structured, U-127
mapping	decomposition, U-79
fields, U-151	description, U-119
matrices tools, U-91	finite volume, P-31
max	generation, U-127, U-136
tensor member function, P-25	grading, U-127, U-132
${\tt maxBoundarySkewness} \ keyword, \ U\text{-}145$	grading, example of, P-53
maxCo keyword, U-59	non-orthogonal, P-45
maxConcave keyword, U-145	refinement, P-62
maxDeltaT keyword, U-59	resolution, U-30
${\tt maxFaceThicknessRatio}\ keyword,\ U\text{-}144$	specification, U-119
maxGlobalCells keyword, U-139	split-hex, U-136

Stereolithography (STL), U-136	LienCubicKE, U-94
surface, U-136	LienLeschzinerLowRE, U-94
validity constraints, U-119	NSRDSfunctions, U-93
meshes tools, U-91	Newtonian, U-95
meshQualityControls keyword, U-138	NonlinearKEShih, U-94
meshTools	PrandtlDelta, U-94
library, U-92	QZeta, U-94
message passing interface	RNGkEpsilon, U-94
MPICH, U-193	RosinRammler, U-93
openMPI, U-81	Smagorinsky2, U-94
method keyword, U-81	Smagorinsky, U-94, U-95
metis	SpalartAllmaras, U-94, U-95
keyword entry, U-80, U-81	anisotropicFilter, U-94
metisCoeffs keyword, U-81	chemistryModel, U-93
MGridGen	chemistrySolver, U-93
keyword entry, U-115	chemkinMixture, U-93, U-172
mhdFoam solver, P-69, U-85	constLaminarFlameSpeed, U-93
mico-2.3.13	constTransport, U-93, U-172
library, U-92	cubeRootVolDelta, U-94
midPoint	diEthylEther, U-93
keyword entry, U-109	diMethylEther, U-93
midPoint keyword, U-167	dieselMixture, U-92, U-172
midPointAndFace keyword, U-167	dynMixedSmagorinsky, U-94
min	dynOneEqEddy, U-94, U-95
tensor member function, P-25	dynSmagorinsky, U-94
minArea keyword, U-145	exponential, U-93
minDeterminant keyword, U-145	general, U-93
minFaceWeight keyword, U-145	guldersLaminarFlameSpeed, U-93
minFlatness keyword, U-145	hConstThermo, U-93, U-171
minMedianAxisAngle keyword, U-144	hMixtureThermo, U-92, U-172
MINMOD differencing, P-38	hThermo, U-92, U-172
minRefinementCells keyword, U-139	hhuMixtureThermo, U-92, U-172
minThickness keyword, U-144	homogeneousMixture, U-92, U-172
minTriangleTwist keyword, U-145	inhomogeneousMixture, U-92, U-172
minTwist keyword, U-145	isoOctane, U-93
minVol keyword, U-145	janafThermo, U-93, U-171
minVolRatio keyword, U-145	kEpsilon, U-94
mirrorMesh utility, U-87	laminar, U-94
mixed	laplaceFilter, U-94
boundary condition, U-128	locDynOneEqEddy, U-94
mixedSmagorinsky model, U-94	lowReOneEqEddy, U-95
mixtureAdiabaticFlameT utility, U-90	mixedSmagorinsky, U-94
mode keyword, U-141	multiComponentMixture, U-93, U-172
model model	nDecane, U-93
APIfunctions, U-93	nDodecane, U-93
BirdCarreau, U-95	nHeptane, U-93
CrossPowerLaw, U-95	nOctane, U-93
DeardorffDiffStress, U-95	normal, U-93
LRDDiffStress, U-95	oneEqEddy, U-94, U-95
LRR, U-94	perfectGas, U-93, U-171
LamBremhorstKE, U-94	pureMixture, U-92, U-172
LaunderGibsonRSTM, U-94	scaleSimilarity, U-94
LaunderSharmaKE, U-94	simpleFilter, U-94
LienCubicKELowRE, U-94	smoothDelta, U-94
LICITCUDICINELOWINE, U-34	SilloutilDella, U-34

P-86 Index

specieThermo, U- $93, ext{ U-}171$	
- E 1 1 3 // TT 0 K	none
spectEddyVisc, U-95	keyword entry, U-108, U-115
sutherlandTransport, U-93, U-172	NonlinearKEShih model, U-94
uniform, U-93	nonNewtonianIcoFoam solver, U-83
veryInhomogeneousMixture, $U-92$, $U-172$	normal model, U-93
water, U - 93	noTime
momentScalarError utility, U-90	menu entry, U-184
moveDynamicMesh utility, U-87	noWriteNow
moveEngineMesh utility, U-87	keyword entry, U-104
moveMesh utility, U-87	nPostSweeps keyword, U-115, U-116
movingWallVelocity	nPreSweeps keyword, U-115
boundary condition, U-129	nRelaxIter keyword, U-142, U-144
MPI	nSmoothNormals keyword, U-144
MPICH, U-193	nSmoothPatch keyword, U-142
openMPI, U-81	nSmoothScale keyword, U-145
MPICH	nSmoothSurfaceNormals keyword, U-144
message passing interface, U-193	nSmoothThickness keyword, U-144
MPI, U-193	nSolveIter keyword, U-142
mpich-1.2.4	NSRDSfunctions model, U-93
library, U-92	null
mshToFoam utility, U-87	keyword entry, U-166
multiComponentMixture model, U-93, U-172	numberOfSubdomains keyword, U-81
multigrid	numberers as a second result of the second results as a second res
geometric-algebraic, U-115	O
multiphaseInterFoam solver, U-84	object keyword, U-99
MUSCL	objToVTK utility, U-87
keyword entry, U-109	ODE
	library, U-92
My Jobs button, U-187	oneEqEddy model, U-94, U-95
N	oodles solver, U-83
n keyword, U-81	Opacity text box, U-159
nabla	
	()pen F() A M
	OpenFOAM applications IL-67
operator, P-27	applications, U-67
operator, P-27 name	applications, U-67 file format, U-98
operator, P-27 name server, U-178	applications, U-67 file format, U-98 libraries, U-67
operator, P-27 name server, U-178 nBufferCellsNoExtrude keyword, U-144	applications, U-67 file format, U-98 libraries, U-67 OpenFOAM
operator, P-27 name server, U-178 nBufferCellsNoExtrude keyword, U-144 nCellsBetweenLevels keyword, U-139	applications, U-67 file format, U-98 libraries, U-67 OpenFOAM library, U-91
operator, P-27 name server, U-178 nBufferCellsNoExtrude keyword, U-144 nCellsBetweenLevels keyword, U-139 nDecane model, U-93	applications, U-67 file format, U-98 libraries, U-67 OpenFOAM library, U-91 OpenFOAM file syntax
operator, P-27 name server, U-178 nBufferCellsNoExtrude keyword, U-144 nCellsBetweenLevels keyword, U-139 nDecane model, U-93 nDodecane model, U-93	applications, U-67 file format, U-98 libraries, U-67 OpenFOAM library, U-91 OpenFOAM file syntax //, U-98
operator, P-27 name server, U-178 nBufferCellsNoExtrude keyword, U-144 nCellsBetweenLevels keyword, U-139 nDecane model, U-93 nDodecane model, U-93 neighbour	applications, U-67 file format, U-98 libraries, U-67 OpenFOAM library, U-91 OpenFOAM file syntax //, U-98 openMPI
operator, P-27 name server, U-178 nBufferCellsNoExtrude keyword, U-144 nCellsBetweenLevels keyword, U-139 nDecane model, U-93 nDodecane model, U-93 neighbour dictionary, U-121	applications, U-67 file format, U-98 libraries, U-67 OpenFOAM library, U-91 OpenFOAM file syntax //, U-98 openMPI message passing interface, U-81
operator, P-27 name server, U-178 nBufferCellsNoExtrude keyword, U-144 nCellsBetweenLevels keyword, U-139 nDecane model, U-93 nDodecane model, U-93 neighbour dictionary, U-121 netgenNeutralToFoam utility, U-87	applications, U-67 file format, U-98 libraries, U-67 OpenFOAM library, U-91 OpenFOAM file syntax //, U-98 openMPI message passing interface, U-81 MPI, U-81
operator, P-27 name server, U-178 nBufferCellsNoExtrude keyword, U-144 nCellsBetweenLevels keyword, U-139 nDecane model, U-93 nDodecane model, U-93 neighbour dictionary, U-121 netgenNeutralToFoam utility, U-87 Newtonian	applications, U-67 file format, U-98 libraries, U-67 OpenFOAM library, U-91 OpenFOAM file syntax //, U-98 openMPI message passing interface, U-81 MPI, U-81 openmpi-1.2.6
operator, P-27 name server, U-178 nBufferCellsNoExtrude keyword, U-144 nCellsBetweenLevels keyword, U-139 nDecane model, U-93 nDodecane model, U-93 neighbour dictionary, U-121 netgenNeutralToFoam utility, U-87 Newtonian keyword entry, U-58	applications, U-67 file format, U-98 libraries, U-67 OpenFOAM library, U-91 OpenFOAM file syntax //, U-98 openMPI message passing interface, U-81 MPI, U-81
operator, P-27 name server, U-178 nBufferCellsNoExtrude keyword, U-144 nCellsBetweenLevels keyword, U-139 nDecane model, U-93 nDodecane model, U-93 neighbour dictionary, U-121 netgenNeutralToFoam utility, U-87 Newtonian	applications, U-67 file format, U-98 libraries, U-67 OpenFOAM library, U-91 OpenFOAM file syntax //, U-98 openMPI message passing interface, U-81 MPI, U-81 openmpi-1.2.6
operator, P-27 name server, U-178 nBufferCellsNoExtrude keyword, U-144 nCellsBetweenLevels keyword, U-139 nDecane model, U-93 nDodecane model, U-93 neighbour dictionary, U-121 netgenNeutralToFoam utility, U-87 Newtonian keyword entry, U-58	applications, U-67 file format, U-98 libraries, U-67 OpenFOAM library, U-91 OpenFOAM file syntax //, U-98 openMPI message passing interface, U-81 MPI, U-81 openmpi-1.2.6 library, U-92 operator scalar, P-28
operator, P-27 name server, U-178 nBufferCellsNoExtrude keyword, U-144 nCellsBetweenLevels keyword, U-139 nDecane model, U-93 nDodecane model, U-93 neighbour dictionary, U-121 netgenNeutralToFoam utility, U-87 Newtonian keyword entry, U-58 Newtonian model, U-95	applications, U-67 file format, U-98 libraries, U-67 OpenFOAM library, U-91 OpenFOAM file syntax //, U-98 openMPI message passing interface, U-81 MPI, U-81 openmpi-1.2.6 library, U-92 operator
operator, P-27 name server, U-178 nBufferCellsNoExtrude keyword, U-144 nCellsBetweenLevels keyword, U-139 nDecane model, U-93 nDodecane model, U-93 neighbour dictionary, U-121 netgenNeutralToFoam utility, U-87 Newtonian keyword entry, U-58 Newtonian model, U-95 nextWrite	applications, U-67 file format, U-98 libraries, U-67 OpenFOAM library, U-91 OpenFOAM file syntax //, U-98 openMPI message passing interface, U-81 MPI, U-81 openmpi-1.2.6 library, U-92 operator scalar, P-28
operator, P-27 name server, U-178 nBufferCellsNoExtrude keyword, U-144 nCellsBetweenLevels keyword, U-139 nDecane model, U-93 nDodecane model, U-93 neighbour dictionary, U-121 netgenNeutralToFoam utility, U-87 Newtonian keyword entry, U-58 Newtonian model, U-95 nextWrite keyword entry, U-104	applications, U-67 file format, U-98 libraries, U-67 OpenFOAM library, U-91 OpenFOAM file syntax //, U-98 openMPI message passing interface, U-81 MPI, U-81 openmpi-1.2.6 library, U-92 operator scalar, P-28 vector, P-27
operator, P-27 name server, U-178 nBufferCellsNoExtrude keyword, U-144 nCellsBetweenLevels keyword, U-139 nDecane model, U-93 nDodecane model, U-93 neighbour dictionary, U-121 netgenNeutralToFoam utility, U-87 Newtonian keyword entry, U-58 Newtonian model, U-95 nextWrite keyword entry, U-104 nFaces keyword, U-122	applications, U-67 file format, U-98 libraries, U-67 OpenFOAM library, U-91 OpenFOAM file syntax //, U-98 openMPI message passing interface, U-81 MPI, U-81 openmpi-1.2.6 library, U-92 operator scalar, P-28 vector, P-27 Options window, U-159
operator, P-27 name server, U-178 nBufferCellsNoExtrude keyword, U-144 nCellsBetweenLevels keyword, U-139 nDecane model, U-93 nDodecane model, U-93 neighbour dictionary, U-121 netgenNeutralToFoam utility, U-87 Newtonian keyword entry, U-58 Newtonian model, U-95 nextWrite keyword entry, U-104 nFaces keyword, U-122 nFinestSweeps keyword, U-115, U-116	applications, U-67 file format, U-98 libraries, U-67 OpenFOAM library, U-91 OpenFOAM file syntax //, U-98 openMPI message passing interface, U-81 MPI, U-81 openmpi-1.2.6 library, U-92 operator scalar, P-28 vector, P-27 Options window, U-159 options file, U-71
operator, P-27 name server, U-178 nBufferCellsNoExtrude keyword, U-144 nCellsBetweenLevels keyword, U-139 nDecane model, U-93 nDodecane model, U-93 neighbour dictionary, U-121 netgenNeutralToFoam utility, U-87 Newtonian keyword entry, U-58 Newtonian model, U-95 nextWrite keyword entry, U-104 nFaces keyword, U-112 nFinestSweeps keyword, U-115, U-116 nGammaSubCycles keyword, U-61	applications, U-67 file format, U-98 libraries, U-67 OpenFOAM library, U-91 OpenFOAM file syntax //, U-98 openMPI message passing interface, U-81 MPI, U-81 openmpi-1.2.6 library, U-92 operator scalar, P-28 vector, P-27 Options window, U-159 options file, U-71 order keyword, U-81
operator, P-27 name server, U-178 nBufferCellsNoExtrude keyword, U-144 nCellsBetweenLevels keyword, U-139 nDecane model, U-93 nDodecane model, U-93 neighbour dictionary, U-121 netgenNeutralToFoam utility, U-87 Newtonian keyword entry, U-58 Newtonian model, U-95 nextWrite keyword entry, U-104 nFaces keyword, U-112 nFinestSweeps keyword, U-115, U-116 nGammaSubCycles keyword, U-61 nGrow keyword, U-144	applications, U-67 file format, U-98 libraries, U-67 OpenFOAM library, U-91 OpenFOAM file syntax //, U-98 openMPI message passing interface, U-81 MPI, U-81 openmpi-1.2.6 library, U-92 operator scalar, P-28 vector, P-27 Options window, U-159 options file, U-71 order keyword, U-81 Orientation Axes button, U-25, U-159

outletInlet	polyPatch class, P-31
boundary condition, U-129	polyPatchList class, P-31
outside	polySpline
keyword entry, U-141	keyword entry, U-132
owner	post-processing, U-155
dictionary, U-121	post-processing
,	paraFoam, U-155
P	postChannel utility, U-90
p field, U-24	potentialFoam solver, P-46, U-83
paraFoam, U-25, U-155	
paraFoam utility, U-88	pow tensor member function, P-25
parallel	
running, U-79	PrandtlDelta model, U-94
partialSlip	preconditioner keyword, U-114
boundary condition, U-129	pRefCell keyword, U-25, U-117
patch	pRefValue keyword, U-25, U-117
boundary condition, U-126	pressure keyword, U-49
patch	pressure waves
keyword entry, U-127, U-168	in liquids, P-62
patchAverage utility, U-89	pressure Directed In let Velocity
patches keyword, U-131, U-133	boundary condition, U-129
patchIntegrate utility, U-89	pressureInletVelocity
patchMap keyword, U-152	boundary condition, U-129
patchTool utility, U-87	pressureOutlet
PBiCG	boundary condition, P-63
keyword entry, U-114	pressureTransmissive
PCG	boundary condition, U-129
keyword entry, U-114	primitive
pdf	library, P-23
library, U-93	primitives tools, U-91
pdRefCell keyword, U-117	process
pdRefValue keyword, U-117	background, U-26, U-79
PDRFoam solver, U-85	foreground, U-26
,	processor
Pe utility, U-89	boundary condition, U-127
perfectGas model, U-93, U-171	processor
permutation symbol, P-19	keyword entry, U-127
Pipeline Browser window, U-25, U-156	processorN directory, U-80
PISO	•
dictionary, U-25	processorWeights keyword, U-81
Plot Over Line	Properties window panel, U-26, U-156
menu entry, U-35	ptot utility, U-90
Plot Type menu, U-35	pureMixture model, U-92, U-172
plot3dToFoam utility, U-87	purge button, U-187
pointField class, P-31	purgeWrite keyword, U-105
pointField <type> template class, P-33</type>	PV3FoamReader
points	library, U-155
dictionary, U-121, U-127	PVFoamReader
pointSet utility, U-87	library, U-155
polyBoundaryMesh class, P-31	
polyDualMesh utility, U-87	\mathbf{Q}
polyLine	Q utility, U-89
keyword entry, U-132	QUICK
polyMesh directory, U-98, U-121	keyword entry, U-109, U-112
polyMesh class, P-31, U-119, U-121	QZeta model, U-94

P-88 Index

${f R}$	runTimeModifiable keyword, U-105
R utility, U-89	
randomProcesses	${f S}$
library, U-92	sammToFoam utility, U-87
rasCavitatingFoam solver, U-84	sample utility, U-90, U-165
rasInterFoam solver, U-84	sampleSurface utility, U-90
RASModel keyword, U-174	sampling
RASProperties	library, U-91
dictionary, U-41, U-174	Save Animation
raw	menu entry, U-161
keyword entry, U-105, U-166	Save Screenshot
Rcomponents utility, U-89	menu entry, U-161
reactingFoam solver, U-85	scalar, P-16
read button, U-187	operator, P-28
reconstructPar utility, U-83, U-90	scalar class, P-23
reconstructParMesh utility, U-90	scalarField class, P-29
referenceLevel keyword, U-187	scalarTransportFoam solver, U-83
refGradient keyword, U-128	scale
refinementRegions keyword, U-141	tensor member function, P-25
refinementRegions keyword, U-139, U-142	scalePoints utility, U-148
refinementSurfaces keyword, U-139	scaleSimilarity model, U-94
refineMesh utility, U-87	scientific
Region Status window panel, U-25	keyword entry, U-105
regions keyword, U-58	script/alias
relative tolerance, U-114	foamCorrectVrt, $U-150$
relTol keyword, U-52, U-114	foamJob, U - 169
Render View window, U-160	foamLog, $U-169$
Render View window panel, U-159	make, U - 69
Render View Options window, U-159	rmdepall, U - 74
renumberMesh utility, U-87	runFoamXHB, $U-177$, $U-178$
Rescale to Data Range button, U-28	runFoamX, U -177 $-U$ -179
Reset button, U-156	wclean, $U-73$
resolveFeatureAngle keyword, U-139, U-140	wmake, $U-69$
restart, U-39	second time derivative, P-37
Reynolds number, U-19, U-23	Seed window, U-160
rhoCentralFoam solver, U-84	Set Solid Color button, U-158
rhoPimpleFoam solver, U-84	setFields utility, U-57, U-58, U-86
rhoPorousSimpleFoam solver, U-84	setFormat keyword, U-166
rhopSonicFoam solver, U-84	sets keyword, U-166
rhoSimpleFoam solver, U-84	Settings
rhoSonicFoam solver, U-84	menu entry, U-159
rhoTurbFoam solver, U-84	settlingFoam solver, U-85
rmdepall script/alias, U-74	SFCD
RNGkEpsilon model, U-94	keyword entry, U-109, U-112
roots keyword, U-81, U-82	shape, U-132
RosinRammler model, U-93	shapeMeshTools
rotateMesh utility, U-88	library, U-92
run	Show Color Legend
parallel, U-79	menu entry, U-28
run directory, U-97	SI units, U-101
runFoamX script/alias, U-177–U-179	simple
runFoamXHB script/alias, U-177, U-178	keyword entry, U-80, U-81
runTime	simpleFilter model, U-94
keyword entry, U-33, U-104	simpleFoam solver, P-54, U-83

simpleGrading keyword, U-133	dnsFoam, U-85
simpleSpline	electrostaticFoam, U-85
keyword entry, U-132	engineFoam, U-85
skew	financialFoam, U-86
tensor member function, P-25	gnemdFoam, U-86
skewLinear	icoDyMFoam, U-83
keyword entry, U-109, U-112	icoFoam, U-19, U-23, U-24, U-26, U-83
slice class, P-31	interDyMFoam, U-84
slip	interFoam, U-84
boundary condition, U-129	interPhaseChangeFoam, U-84
Smagorinsky model, U-94, U-95	laplacianFoam, U-83
Smagorinsky2 model, U-94	lesBuoyantFoam, U-85
smapToFoam utility, U-88	lesCavitatingFoam, U-84
smoothDelta model, U-94	lesInterFoam, U-84
smoother keyword, U-115	mdEquilibrationFoam, U-86
smoothSolver	mhdFoam, P-69, U-85
keyword entry, U-114	multiphaseInterFoam, U-84
snap keyword, U-138	nonNewtonianIcoFoam, U-83
snapControls keyword, U-138	oodles, U-83
snappyHexMesh utility	potentialFoam, P-46, U-83
background mesh, U-138	rasCavitatingFoam, U-84
cell removal, U-140	rasInterFoam, U-84
· · · · · · · · · · · · · · · · · · ·	•
cell splitting, U-139	reactingFoam, U-85
mesh layers, U-142	rhoCentralFoam, U-84
meshing process, U-137	rhoPimpleFoam, U-84
snapping to surfaces, U-142	rhoPorousSimpleFoam, U-84
snappyHexMesh utility, U-136	rhoSimpleFoam, U-84
snappyHexMeshDict file, U-137	rhoSonicFoam, U-84
snGrad	rhoTurbFoam, U-84
fvc member function, P-37	rhopSonicFoam, U-84
snGradCorrection	scalarTransportFoam, U-83
fvc member function, P-37	settlingFoam, U-85
snGradSchemes keyword, U-107	simpleFoam, P-54, U-83
Solid Color	solidDisplacementFoam, U-50, U-85
menu entry, U-158	solidEquilibriumDisplacementFoam, U-86
solidDisplacementFoam solver, U-50, U-85	sonic Foam Auto Motion, $U-84$
solidEquilibriumDisplacementFoam solver, U-86	sonicFoam, P-60, U-84
solver	sonicLiquidFoam, P-63, U-84
PDRFoam, U-85	sonicTurbFoam, U-84
XiFoam, U-85	turbDyMFoam, U -84
Xoodles, U-85	turbFoam, U-19, U-84
blockMesh, P-47	twoLiquidMixingFoam, $U-85$
boundaryFoam, U - 83	twoPhaseEulerFoam, $U-85$
bubbleFoam, U-84	solver relative tolerance, U-114
buoyant $Foam, U-85$	solver tolerance, U-114
buoyant $SimpleFoam,\ U ext{-}85$	solvers keyword, U-113
buoyant $SimpleRadiationFoam,\ U-85$	sonicFoam solver, P-60, U-84
channelOodles, $U-83$	sonicFoamAutoMotion solver, U-84
chtMultiRegionFoam, U-85	sonicLiquidFoam solver, P-63, U-84
coldEngineFoam, U-85	sonicTurbFoam solver, U-84
compressibleLesInterFoam, U-84	source, P-37
coodles, U-84	SpalartAllmaras model, U-94, U-95
dieselEngineFoam, U-85	specie
dieselFoam, U-85	library, U-93

P-90 Index

specieThermo model, U-93, U-171	symmTensorField class, P-29
spectEddyVisc model, U-95	symmTensorThirdField class, P-29
spline keyword, U-131	system directory, P-49, U-98
splitMesh utility, U-88	
splitMeshRegions utility, U-88	${f T}$
sqr	T()
tensor member function, P-25	tensor member function, P-25
sqrGradGrad	template class
fvc member function, P-37	GeometricBoundaryField, P-32
startFace keyword, U-122	fvMatrix, P-33
startFrom keyword, U-23, U-104	dimensioned <type>, P-25</type>
	FieldField <type>, P-32</type>
starToFoam utility, U-87, U-144	Field <type>, P-29</type>
startTime	geometricField <type>, P-32</type>
keyword entry, U-23, U-104	List <type>, P-29</type>
startTime keyword, U-23, U-104	pointField <type>, P-33</type>
status button, U-187	
steady flow	surfaceField <type>, P-33</type>
turbulent, P-53	volField <type>, P-33</type>
steadyState	temporal discretisation, P-42
keyword entry, U-112	Crank Nicholson, P-42
Stereolithography (STL), U-136	Euler implicit, P-42
stitchMesh utility, U-88	explicit, P-42
stl	in OpenFOAM, P-43
keyword entry, U-166	tensor, P-15
stopAt keyword, U-104	addition, P-17
streamFunction utility, U-89	algebraic operations, P-17
stress analysis of plate with hole, U-45	algebraic operations in OpenFOAM, P-23
stressComponents utility, U-89	antisymmetric, see tensor, skew
Style window panel, U-25, U-158	calculus, P-27
Su	classes in OpenFOAM, P-23
fvm member function, P-37	cofactors, P-22
subsetMesh utility, U-88	component average, P-20
summation convention, P-17	component maximum, P-20
SUPERBEE differencing, P-38	component minimum, P-20
supersonic flow, P-58	determinant, P-22
supersonic flow over forward step, P-58	deviatoric, P-21
supersonicFreeStream	diagonal, P-21
boundary condition, U-129	dimension, P-16
surface mesh, U-136	double inner product, P-19
surfaceField <type> template class, P-33</type>	geometric transformation, P-20
surfaceFormat keyword, U-166	Hodge dual, P-22
surfaceNormalFixedValue	hydrostatic, P-21
boundary condition, U-129	identities, P-21
surfaces keyword, U-166	identity, P-20
,	inner product, P-18
SuSp fvm member function, P-37	inverse, P-22
	•
suspend button, U-187	magnitude, P-20
sutherlandTransport model, U-93, U-172	magnitude squared, P-20
symm	mathematics, P-15
tensor member function, P-25	notation, P-17
symmetryPlane	nth power, P-20
boundary condition, P-63, U-126	outer product, P-19
symmetryPlane	rank, P-16
keyword entry, U-127	rank 3, P-16

scalar division, P-18	library, U-171
scalar multiplication, P-17	thermophysicalFunctions
scale function, P-20	library, U-93
second rank, P-16	thermophysicalProperties
skew, P-21	dictionary, U-171
square of, P-20	thermoType keyword, U-171
subtraction, P-17	time
symmetric, P-21	control, U-104
symmetric rank 2, P-16	time derivative, P-37
symmetric rank 3, P-16	first, P-39
trace, P-21	second, P-37, P-39
transformation, P-20	time step, U-24
transpose, P-16, P-21	timeFormat keyword, U-105
triple inner product, P-19	timePrecision keyword, U-105
vector cross product, P-19	timeScheme keyword, U-107
tensor class, P-23	timeStep
tensor member function	keyword entry, U-24, U-33, U-104
*, P-25	tolerance
+, P-25	solver, U-114
-, P-25	solver relative, U-114
/, P-25	tolerance keyword, U-52, U-114, U-142
&, P-25	Toolbars
&&, P-25	menu entry, U-159
^, P-25	tools
cmptAv, P-25	adjustPhi, U-91
cofactors, P-25	algorithms, U-91
det, P-25	bound, U-91
dev, P-25	compressible, U-91
diag, P-25	containers, U-91
I, P-25	db, U-91
inv, P-25	dimensionSet, U-91
mag, P-25	dimensionedTypes, U-91
magSqr, P-25	fields, U-91
max, P-25	finiteVolume, U-91
min, P-25	global, U-91
pow, P-25	incompressible, U-91
scale, P-25	interpolations, U-91
skew, P-25	matrices, U-91
sqr, P-25	meshes, U-91
symm, P-25	primitives, U-91
T(), P-25	wallDist, U-91
tr, P-25	topoSetSource keyword, U-58
transform, P-25	totalPressure
•	
tensorField class, P-29	boundary condition, U-129
tensorThirdField class, P-29 tetDecomposition utility, U-88	tr
	tensor member function, P-25
tetgenToFoam utility, U-87	trace, see tensor, trace
text box	traction keyword, U-49
Case Page II 182	transform
Case Root, U-182	tensor member function, P-25
Opacity, U-159	transformPoints utility, U-88
thermalProperties	transportProperties
dictionary, U-50	dictionary, U-23, U-39, U-41
thermophysical	transportProperties file, U-58

P-92 Index

triple inner product, P-19	Co, U-88
triSurface	FoamX, U-86
library, U-92	Lambda2, U-89
turbDyMFoam solver, U-84	Mach, U-89
turbFoam solver, U-19, U-84	Pe, U-89
turbulence	Q, U-89
dissipation, U-40	Rcomponents, U-89
kinetic energy, U-40	R, U-89
length scale, U-41	Ucomponents, P-70, U-89
model, U-41	adiabaticFlameT, $U-90$
turbulence keyword, U-174	ansysToFoam, $U-86$
turbulence model	attachMesh, U-87
RAS, U-40	autoPatch, U-87
turbulent flow	blockMesh, U-38, U-86, U-127
steady, P-53	boxTurb, U-86
turbulentInlet	ccm26ToFoam, U-86
boundary condition, U-129	cellSet, U-87
tutorials	cfxToFoam, U-86, U-145
breaking of a dam, U-55	checkMesh, U-87, U-146
	checkYPlus, U-89
lid-driven cavity flow, U-19	chemkinToFoam, U-90
stress analysis of plate with hole, U-45	· · · · · · · · · · · · · · · · · · ·
tutorials directory, P-45, U-19	couplePatches, U-87
twoLiquidMixingFoam solver, U-85	createPatch, U-87
twoPhaseEulerFoam solver, U-85	decomposePar, U-79, U-80, U-90
type keyword, U-124, U-125	deformedGeom, U-87
TT	divU, U-88
\mathbf{U}	engineCompRatio, U -90
U field, U-24	engineSwirl, U-86
Ucomponents utility, P-70, U-89	ensight 74 Foam $Exec, U-164$
UMIST	ensight76FoamExec, U-88
keyword entry, U-108	enstrophy, U-88
uncompressed	equilibriumCO, U-90
keyword entry, U-105	equilibriumFlameT, U-90
uncorrected	estimateScalarError, U-90
keyword entry, U-110, U-111	extrudeMesh, U-86
uniform model, U-93	faceSet, U-87
uniform keyword, U-167	flattenMesh, U-87
units	flowType, U-88
base, U-101	fluentMeshToFoam, U-87, U-144
of measurement, P-25, U-101	foamCalc, U-33
S.I. base, P-25	
,	foamDataToFluent, U-88, U-162
SI, U-101	${\sf foamDebugSwitches}, {\color{red}U-90}$
SI, U-101 Système International, U-101	foamDebugSwitches, U -90 foamInfoExec, U -90
SI, U-101	${\sf foamDebugSwitches}, {\color{red}U-90}$
SI, U-101 Système International, U-101	foamDebugSwitches, U -90 foamInfoExec, U -90
SI, U-101 Système International, U-101 United States Customary System, U-101	foamDebugSwitches, U-90 foamInfoExec, U-90 foamMeshToFluent, U-87, U-162
SI, U-101 Système International, U-101 United States Customary System, U-101 USCS, U-101	foamDebugSwitches, U-90 foamInfoExec, U-90 foamMeshToFluent, U-87, U-162 foamToEnsight, U-88
SI, U-101 Système International, U-101 United States Customary System, U-101 USCS, U-101 Update GUI button, U-28, U-157	foamDebugSwitches, U-90 foamInfoExec, U-90 foamMeshToFluent, U-87, U-162 foamToEnsight, U-88 foamToFieldview9, U-88
SI, U-101 Système International, U-101 United States Customary System, U-101 USCS, U-101 Update GUI button, U-28, U-157 uprime utility, U-89 upwind	foamDebugSwitches, U-90 foamInfoExec, U-90 foamMeshToFluent, U-87, U-162 foamToEnsight, U-88 foamToFieldview9, U-88 foamToGMV, U-88 foamToVTK, U-88
SI, U-101 Système International, U-101 United States Customary System, U-101 USCS, U-101 Update GUI button, U-28, U-157 uprime utility, U-89 upwind keyword entry, U-109, U-112	foamDebugSwitches, U-90 foamInfoExec, U-90 foamMeshToFluent, U-87, U-162 foamToEnsight, U-88 foamToFieldview9, U-88 foamToGMV, U-88 foamToVTK, U-88 gambitToFoam, U-87, U-144
SI, U-101 Système International, U-101 United States Customary System, U-101 USCS, U-101 Update GUI button, U-28, U-157 uprime utility, U-89 upwind keyword entry, U-109, U-112 upwind differencing, P-38, U-60	foamDebugSwitches, U-90 foamInfoExec, U-90 foamMeshToFluent, U-87, U-162 foamToEnsight, U-88 foamToFieldview9, U-88 foamToGMV, U-88 foamToVTK, U-88 gambitToFoam, U-87, U-144 gmshToFoam, U-87
SI, U-101 Système International, U-101 United States Customary System, U-101 USCS, U-101 Update GUI button, U-28, U-157 uprime utility, U-89 upwind keyword entry, U-109, U-112 upwind differencing, P-38, U-60 USCS units, U-101	foamDebugSwitches, U-90 foamInfoExec, U-90 foamMeshToFluent, U-87, U-162 foamToEnsight, U-88 foamToFieldview9, U-88 foamToGMV, U-88 foamToVTK, U-88 gambitToFoam, U-87, U-144 gmshToFoam, U-87 icoErrorEstimate, U-90
SI, U-101 Système International, U-101 United States Customary System, U-101 USCS, U-101 Update GUI button, U-28, U-157 uprime utility, U-89 upwind keyword entry, U-109, U-112 upwind differencing, P-38, U-60 USCS units, U-101 Use Parallel Projection button, U-25	foamDebugSwitches, U-90 foamInfoExec, U-90 foamMeshToFluent, U-87, U-162 foamToEnsight, U-88 foamToFieldview9, U-88 foamToGMV, U-88 gambitToFoam, U-87, U-144 gmshToFoam, U-87 icoErrorEstimate, U-90 icoMomentError, U-90
SI, U-101 Système International, U-101 United States Customary System, U-101 USCS, U-101 Update GUI button, U-28, U-157 uprime utility, U-89 upwind keyword entry, U-109, U-112 upwind differencing, P-38, U-60 USCS units, U-101	foamDebugSwitches, U-90 foamInfoExec, U-90 foamMeshToFluent, U-87, U-162 foamToEnsight, U-88 foamToFieldview9, U-88 foamToGMV, U-88 foamToVTK, U-88 gambitToFoam, U-87, U-144 gmshToFoam, U-87 icoErrorEstimate, U-90

insideCells, U-87	writeMeshObj, U-87
kivaToFoam, U-87	yPlusLES, U-89
$magGradU,\ U\text{-}89$	zipUpMesh, U-88
magU, U-89	T 7
$mapFields,\ U32,\ U38,\ U42,\ U54,\ U86,$	V
U-151	value keyword, U-23, U-128
mergeMeshes, U-87	valueFraction keyword, U-128
mirrorMesh, U-87	van Leer differencing, P-38
mixtureAdiabaticFlameT, U-90	vanLeer
momentScalarError, U-90	keyword entry, U-109
moveDynamicMesh, U-87	VCR Controls menu, U-28, U-157
moveEngineMesh, U-87	vector, P-16
moveMesh, U-87	operator, P-27
mshToFoam, U-87	unit, P-20
netgenNeutralToFoam, U-87	vector class, P-23, U-101
objToVTK, U-87	${\it vector product}, see {\it tensor}, {\it vector cross} {\it product}$
paraFoam, U-88	vectorField class, P-29
patchAverage, U-89	version keyword, U-99
patchIntegrate, U-89	vertices keyword, U-22, U-131
patchTool, U-87	veryInhomogeneousMixture model, U-92, U-172
plot3dToFoam, U-87	View menu, U-159
pointSet, U-87	View Settings
polyDualMesh, U-87	menu entry, $U-25$, $U-159$
postChannel, U-90	View Settings
ptot, U-90	menu entry, U-25
${\sf reconstructParMesh}, \underline{{\sf U-90}}$	viscosity
reconstructPar, U-83, U-90	kinematic, U-23, U-41
refineMesh, U-87	volField <type> template class, P-33</type>
renumberMesh, U-87	vorticity utility, U-89
rotateMesh, U-88	vtk
sammToFoam, U-87	keyword entry, U-166
sampleSurface, $U-90$	vtkFoam
sample, $U-90$, $U-165$	library, U-155
scalePoints, U-148	vtkPV3Foam
setFields, U-57, U-58, U-86	library, U-155
smapToFoam, U-88	***
$snappyHexMesh,\ U\text{-}136$	\mathbf{W}
splitMeshRegions, U-88	wall
splitMesh, U-88	boundary condition, P-63, P-69, U-57,
starToFoam, U-87, U-144	U-126
stitchMesh, U-88	wall
streamFunction, U-89	keyword entry, U-127
stressComponents, U-89	wall function, U-94
subsetMesh, U-88	wallBuoyantPressure
tetDecomposition, U-88	boundary condition, U-129
tetgenToFoam, U-87	wallDist tools, U-91
transformPoints, U-88	wallFunctionCoeffs keyword, U-174
uprime, U-89	wallGradU utility, U-89
vorticity, U-89	wallHeatFlux utility, U-89
wallGradU, U-89	wallShearStress utility, U-89
wallHeatFlux, U-89	water model, U-93
wallShearStress, U-89	wclean script/alias, U-73
wdot, U-90	wdot utility, U-90
writeCellCentres, U-90	wedge

P-94 Index

boundary condition, U-122, U-127, U-135	environment variable, U-74
wedge	WM_PROJECT_INST_DIR
keyword entry, U-127	environment variable, U-74
window	WM_PROJECT_LANGUAGE
Chart Options, U-35	environment variable, U-74
Color Legend, U-30	WM_PROJECT_USER_DIR
Options, U-159	environment variable, U-74
Pipeline Browser, U-25, U-156	WM_PROJECT_VERSION
Render View Options, U-159	environment variable, U-74
Render View, U-160	WM_SHELL
Seed, U-160	environment variable, U-74
window panel	wmake
Annotation, U-25, U-159	platforms, U-71
Color Legend, U-158	wmake script/alias, U-69
Color Scale, U-158	word class, P-25, P-31
Display, U-25, U-28, U-156, U-157	writeCellCentres utility, U-90
General, U-159	writeCompression keyword, U-105
Information, U-156	writeControl
Lights, U-159	keyword entry, U-104
Properties, U-26, U-156	writeControl keyword, U-24, U-59, U-104
Region Status, U-25	writeFormat keyword, U-54, U-105
Render View, U-159	writeInterval keyword, U-24, U-33, U-105
Style, U-25, U-158	writeMeshObj utility, U-87
Wireframe	writeNow
menu entry, U-158	keyword entry, U-104
WM_ARCH	writePrecision keyword, U-105
environment variable, U-74	37
WM_COMPILE_OPTION	\mathbf{X}
environment variable, U-74	X
WM_COMPILER	keyword entry, U-167
environment variable, U-74	XiFoam solver, U-85
WM_COMPILER_BIN	xmgr
environment variable, U-74	keyword entry, U-105, U-166
WM_COMPILER_DIR	Xoodles solver, U-85
environment variable, U-74	xyz
WM_COMPILER_LIB	keyword entry, U-167
environment variable, U-74	\mathbf{V}
WM_DIR	\mathbf{Y}
environment variable, U-74 WM_JAVAC_OPTION	y
	keyword entry, U-167
environment variable, U-74 WM_LINK_LANGUAGE	yPlusLES utility, U-89
	${f Z}$
environment variable, U-74 WM_MPLIB	Z
	keyword entry, U-167
environment variable, U-74	zeroGradient
WM_OPTIONS	boundary condition, U-128
environment variable, U-74 WM_PROJECT	zipUpMesh utility, U-88
environment variable, U-74	zlib-1.2.3
WM_PROJECT_DIR	library, U-92
···· ··· ··· · · · · · · · · · · · ·	11.01.01.J, U U 2